技术数据表

特点（ ）：

应用领域（ ）：

# 目录

Catalogue

¨ »(©

## 电性参数

| | | | |
|---|---|---|---|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

| | | | | | | |
|---|---|---|---|---|---|---|
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

**亮度分档**

：

| 代码 | 最小值 | 最大值 | 单位 | 测试条件 |
|---|---|---|---|---|
| A4 | 300 | 400 | mcd | IF=20mA |
| A5 | 400 | 500 | | |
| A6 | 500 | 700 | | |
| A7 | 700 | 900 | | |

**电压分档**

：

| 代码 | 最小值 |
|---|---|

**波长分档**

# 典型特性曲线

光谱分布曲线
Relative Spectral Distrbution

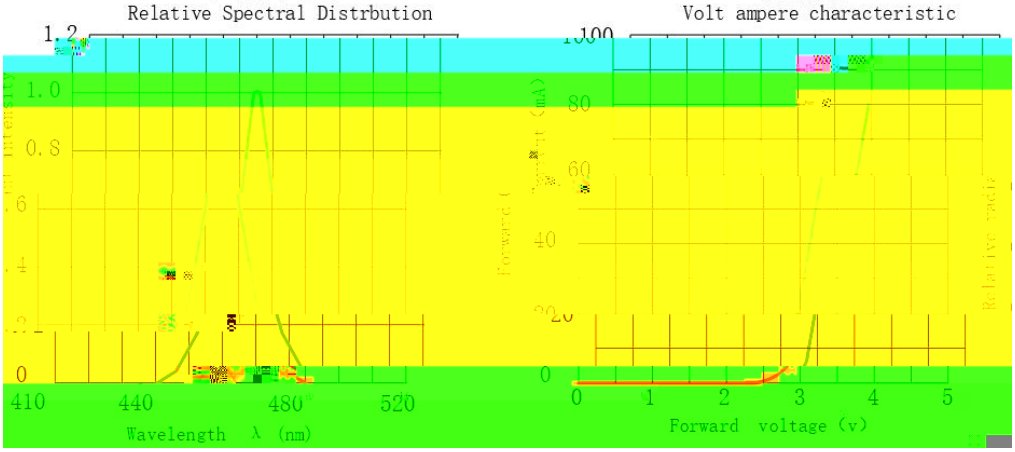


伏安特性
Volt ampere characteristic




正向电流降额曲线
Forward current derating curve

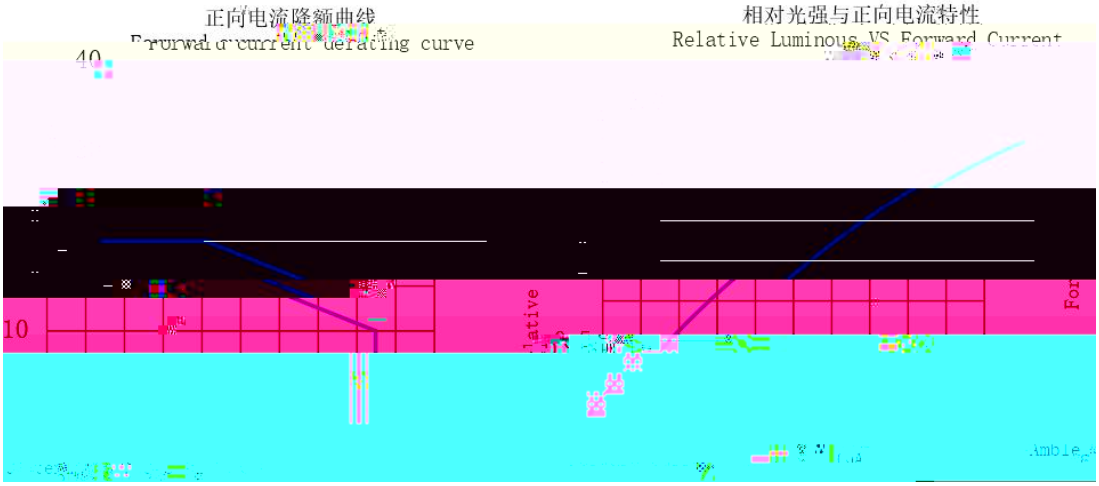


相对光强与正向电流特性
Relative Luminous VS Forward Current



光强与环境温度曲线
Luminous Intensity VS Ambient Temperature

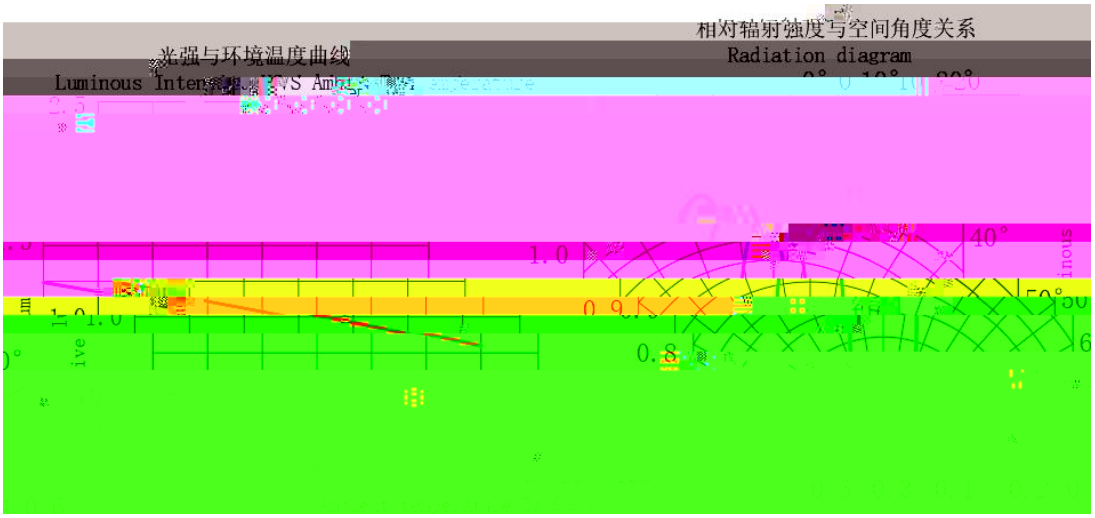


相对辐射强度与空间角度关系
Radiation diagram




25±5 /Note If not otherwise indicated the test environment temp erature is 25±5

# 可靠性试验

**Reliability Test Items And Conditions**

| Class | Test item | Testing environment | Testing time | Qty | Fail qty |
|---|---|---|---|---|---|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

# 外形尺寸

(Note)

Dimensions are in millimeters.

Tolerances unless mentioned ± 0.50

# 包装

*
In Bags

*
Moisture Proof and Anti-Electrostatic Foil Bag

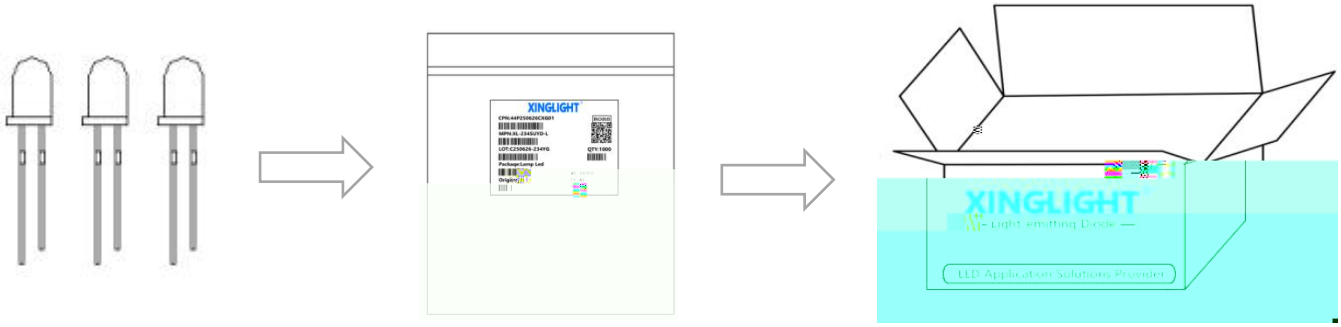

LED

This LED can be used in some ordinary electronic equipment, such as office equipment, communication equipment, house decoration, if LED is used in some high reliability requirements, such as air transportation, traffic control and medical equipment, must refer to the information provided by sales.

Storage environment of LED: temperature not exceed

使用注意事项（ ）

2mm

When welding, welding must be conducted below 2mm of colloid bottom. When welding, try to avoid soaking LED colloid. After welding, avoid adding external force on the pin or shaking LED colloid.

LED LED A LED LED

In the current driving mode of LED, if LED is multiple in parallel, it is recommended to use line A and add a flow limit resistance to each LED to ensure the consistent brightness of LED.

LED InGaN
HBM<1000V <100V
High increase of static electricity and current will damage LED. Use antistatic devices such as protective belts and gloves. Note: human discharge mode HBM <1000V; machine discharge mode <100V.

## 使用注意事项（ ）

**8、其他事项：**

When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics. Excessive force to the encapsulant might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress ons LEDs, especially when the LEDs are heated such as during Reflow Soldering.



LED

The epoxy resin of encapsulant is fragile, so please avoid scratch or friction over the epoxy resin surface. While handling the product with tweezers, do not hold by the epoxy resin, be careful.

**9、眼睛保护忠告：**

LED LED

Viewing direct to the