

Insulation

11.3*15.0*10.3mm

Version: F 11.3*15.0*10.3mm

: /

目录

Catalogue

Electrical Characteristics.....3

Typical Characteristic Curves.....5

Outline Dimensions.....7

Packaging..... 8

Precautions..... 9

电性参数

Electrical Characteristics

Absolute Maximum Ratings		Ta=25	
Parameter	Symbol	Rating	Unit
Consumed power	Pd	70	mW
Max Continuous Forward Current	IF	20	mA

亮度分档:

Brightness grading:

代码 Code	最小值 Min	最大值 Max
------------	------------	------------

电压分档:

Voltage grading:




色温分档:

Color temperature grading

× 0 B

典型特性曲线

Typical Characteristics Curves

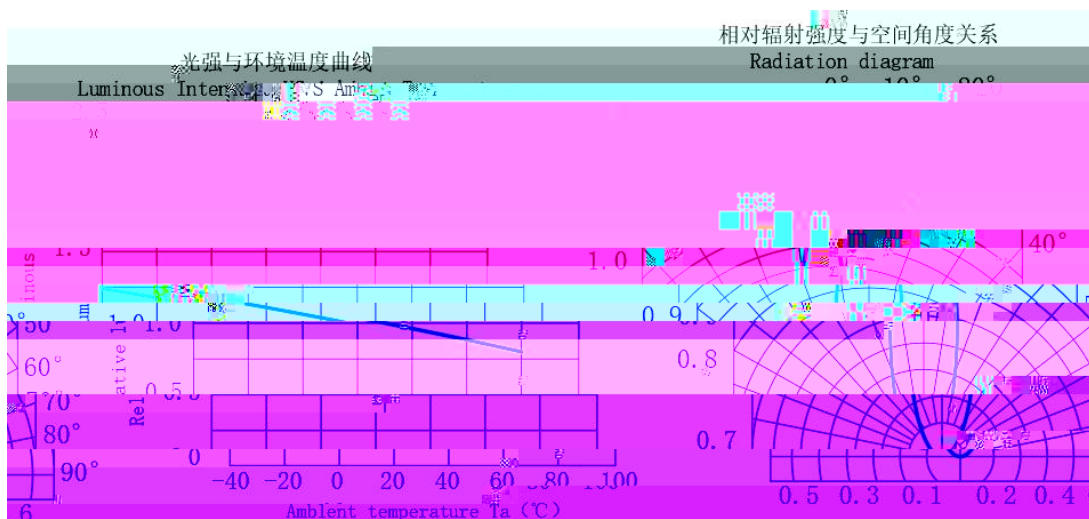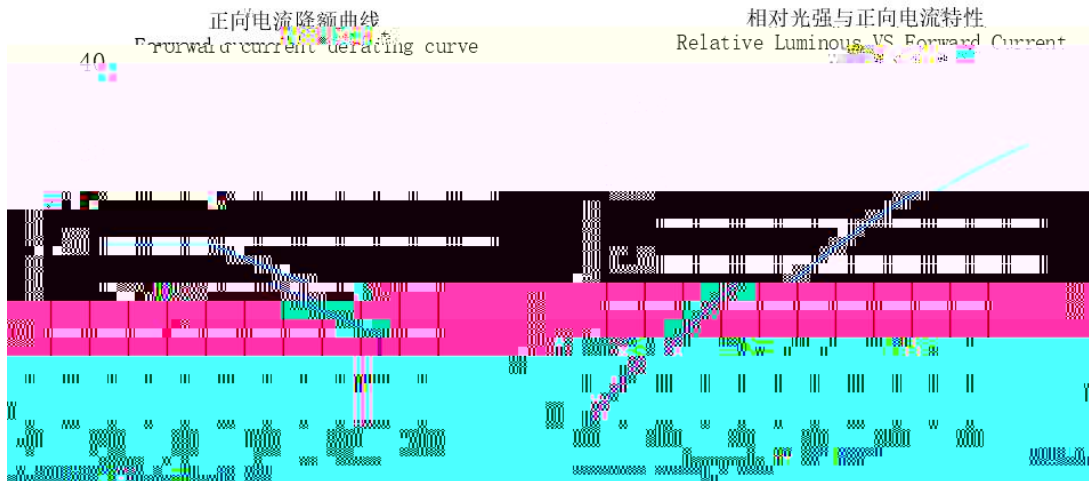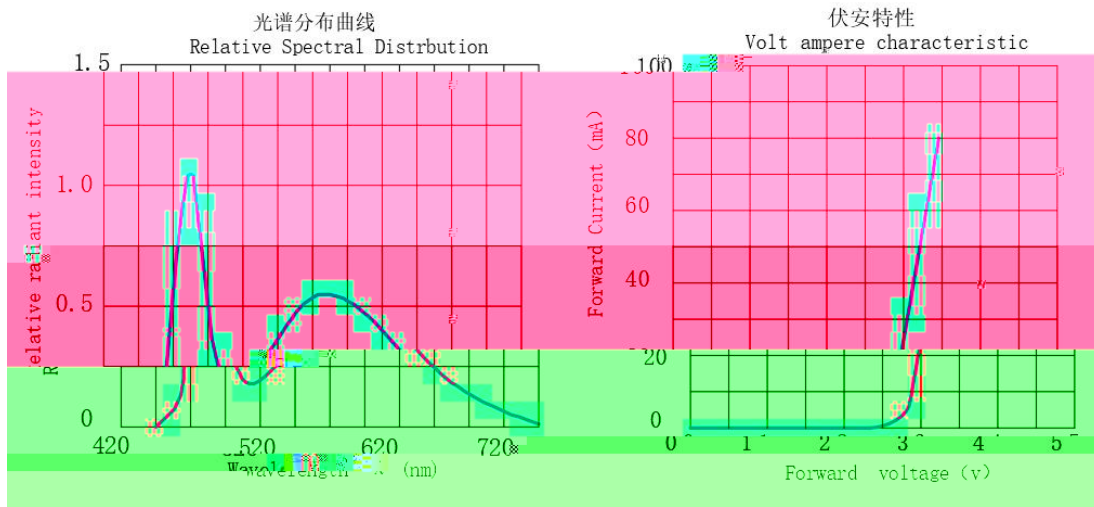



25 + 5 °C./Note: If not otherwise indicated, the test environment temperature is 25 + 5 °C.

Reliability Test Items And Condition

A large black rectangular area covering the majority of the page, likely representing redacted content or a placeholder image. The black area is uniform in color and texture, with no visible text or patterns. It occupies almost the entire frame, leaving only a small white border at the top and bottom.

外形尺寸

Outline Dimension

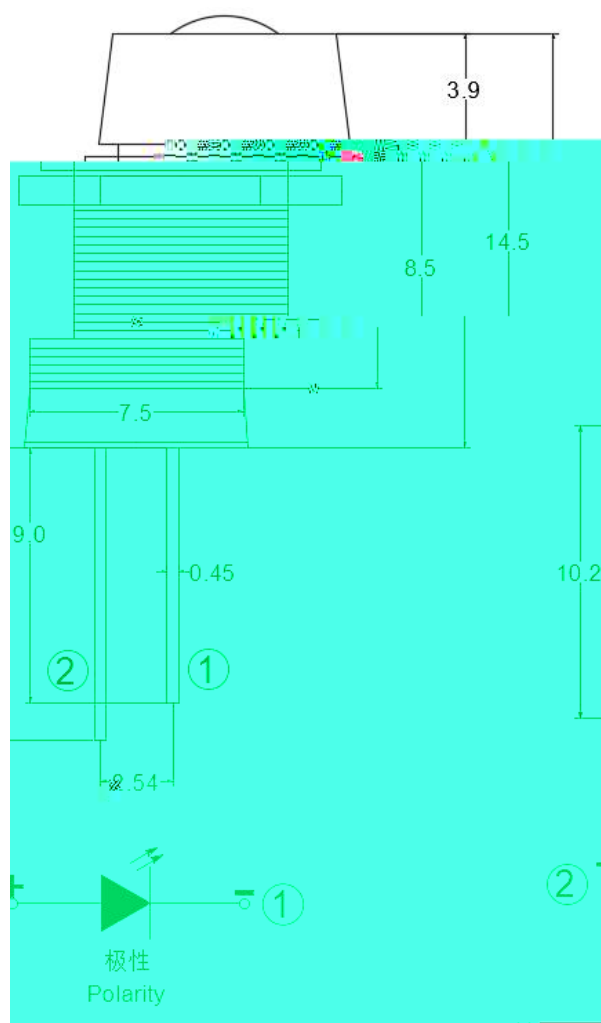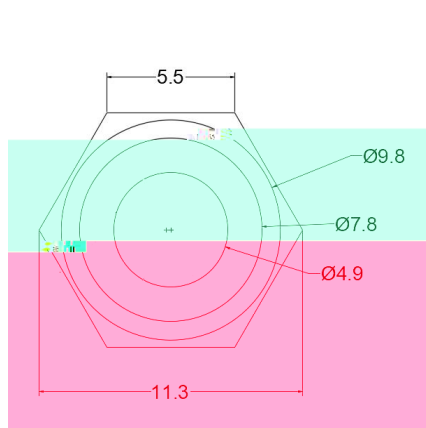

(Note)

1.

Dimensions are in millimeters.

2.

$\pm 0.25\text{mm}$.

Tolerances unless mentioned are $\pm 0.25\text{mm}$.



使用注意事項 (1)

Precautions (1)

1. APPLY

LED

LED

This LED can be used in some ordinary electronic equipment, such as office equipment, communication equipment, house decoration, if LED is used in some high reliability requirements, such as air transportation, traffic control and medical liao equipment, must refer to the information provided by sales.

2. Keep in storage

LED

30

70%

LED

Storage environment of LED with temperature not exceeding 30 and relative humidity not exceeding 70%. It is recommended that LED be used in the original

位 产 西 (2)
P

使用注意事項 (3)


P (3)

8、其他事項:

Others

*

*When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics. Excessive force to the encapsulant might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the LEDs are heated such as during Reflow Soldering.



*LED

*The epoxy resin of encapsulant is fragile, so please avoid scratch