

XL-257SYGC-L

257

技术数据表

外观 (Appearance) :

: 5.0*2.0*7.0*28mm

Appearance dimension: 5.0*2.0*7.0*28mm

* : /

Luminous color and colloid: yellow green brightness White water colloid
5.0*2.0*7.0*28mm

Environment protection products meet ROHS requirements

*, MSL :2

*

*

*

应用场合 (Application) :

* oye ;
Home appliances, digital, communication

*

Automotive Beams

目录
Catalogue

3

(0001)

电性参数

Max Continuous Forward Current	IF		

Luminous Intensity	Iv	50	/	100	mcd	IF=20mA
Dominant Wave Length	λ d	565	/	575	nm	IF=20mA
Peak Wave Length	λ p	/	570	/	nm	IF=20mA
Forward Voltage	VF	2.0	2.2	2.6	V	IF=20mA
Viewing Angle	2θ1/2	/	110	/	deg	IF=20mA
Spectral Width at half height	λ	/	15	/	nm	IF=20mA
Reverse Current	IR	/	/	≤ 10	μ A	VR=5V

± 10%

± 0.1V (X,Y)

± 0.01

± 1nm

Note: the light intensity error is 10%; The pressure drop error is ±0.1V ; (X,Y) coordinate deviation ±0.01 wavelength error ±1 nm.

波长: 分栏

代码	最小值	最大值	范围	测试条件




可靠性试验

Reliability Test Items And Conditions

Endurance test	Working life	Ta=25 ± 5 , IF=20mA	1000hrs	22 PCS	0/1
	High temperature and high humidity experiment	Ta= 85 ± 5 , RH= 85 ~ 90%	1000hrs	22 PCS	0/1
	High-temperature storage	Ta= 85 ± 5	1000hrs	22 PCS	0/1
	Low temperature storage	Ta= -40 ± 5	1000hrs	22 PCS	0/1
Environmental testing	Cold and hot cycle	100 ± 5 30mins -40 ± 5 5mins 30mins	100 Circles	22 PCS	0/1
	Hot and cold impact	105 ± 5 5mins -45 ± 5 5mins	100 Circles	22 PCS	0/1
Mechanical Test	Resistance to Soldering Heat	T.sol= 250 ± 5	2times	22 PCS	0/1
	Lead Integrity	Load 2.5N(0.25kgf) 0 ° ~ 90 ° ~ 0 °	3times	22 PCS	0/1


外形尺寸

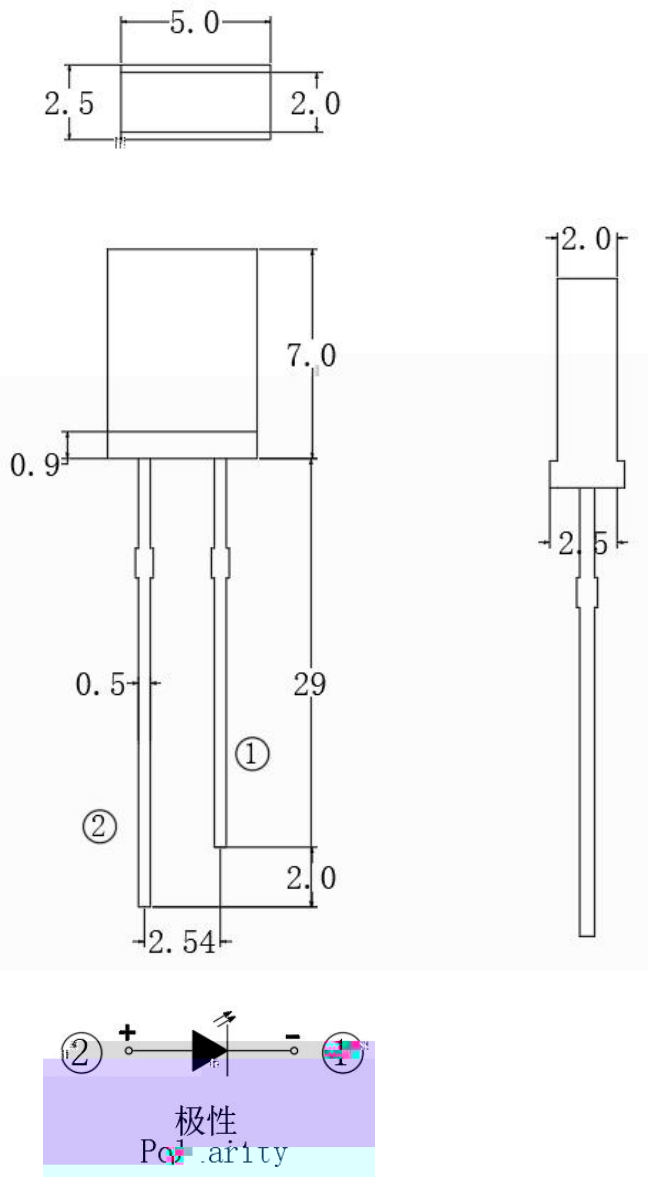

1.


2. mm .

包装

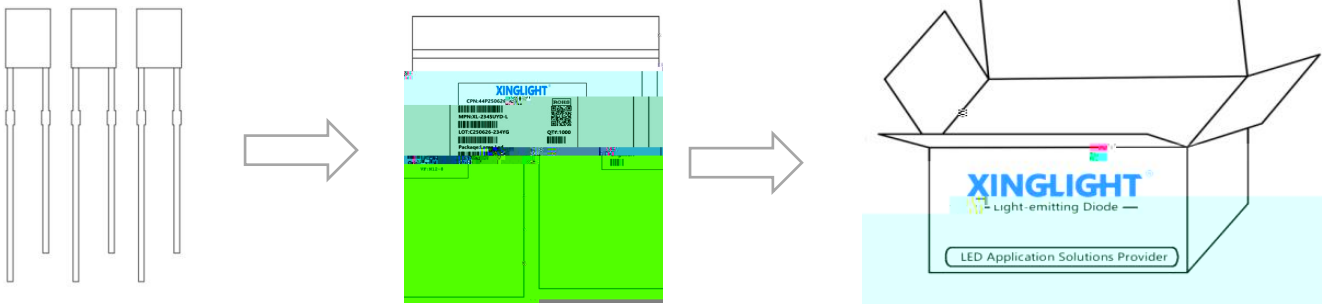

标签说明 Label Expansion

CPN: 批号/档位 LOT: 日期/封装颜色
MPN: 型号 VF: 电压代

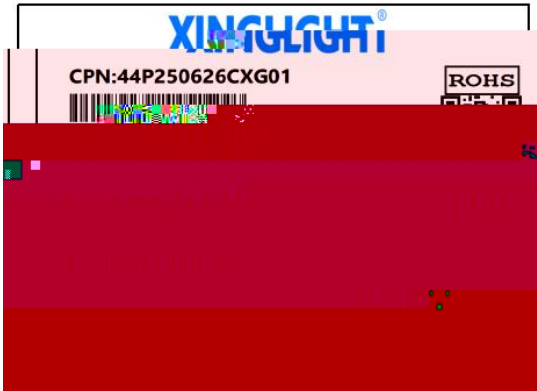


使用注意事項 (1)

LED

LED 30 70% LED

3

LED

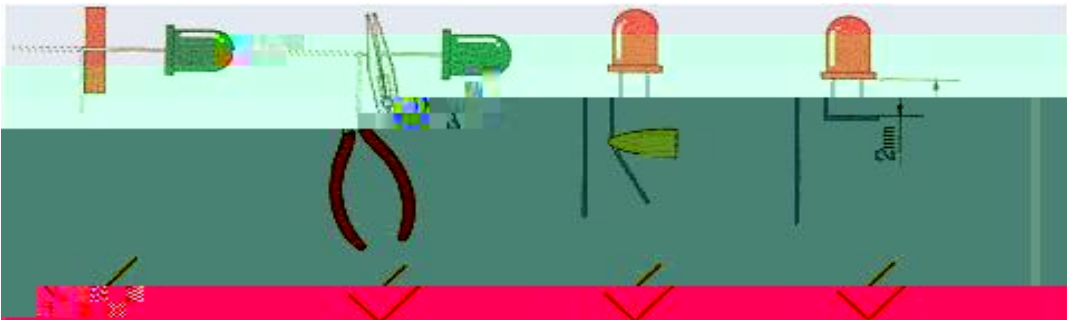

使用注意事項 (2)

Precautions


使用注意事項 (3)

Precautions (3)

8、其他事項:

*

*



*

*

9、眼睛保護忠告:

*

*