目录

Catalogue

电性参数

典型特性曲线

可靠性实验

外形尺寸

包装

使用注意事项

接收[illegible]分档

代码	最小值	最大值	单位	测试条件
L1	6	8	M	ICC=0.5mA
L2	10	15		
L3	15	20		

工作电压分档

代码	最小值	最大值	单位	测试条件
V1	2.5	5.5	V	ICC=0.5mA
V2	2.7	5.5		

工作电流分档

典型特性曲线

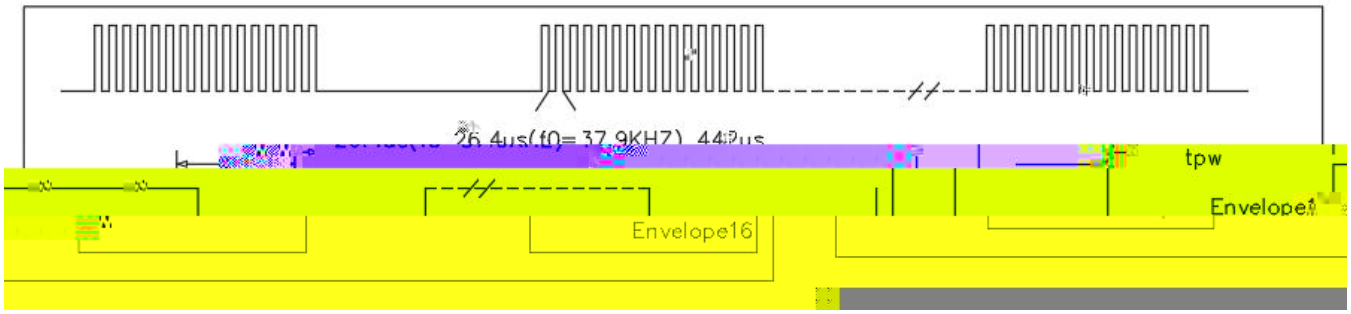

Figure 4. Typical Bandpass Curve

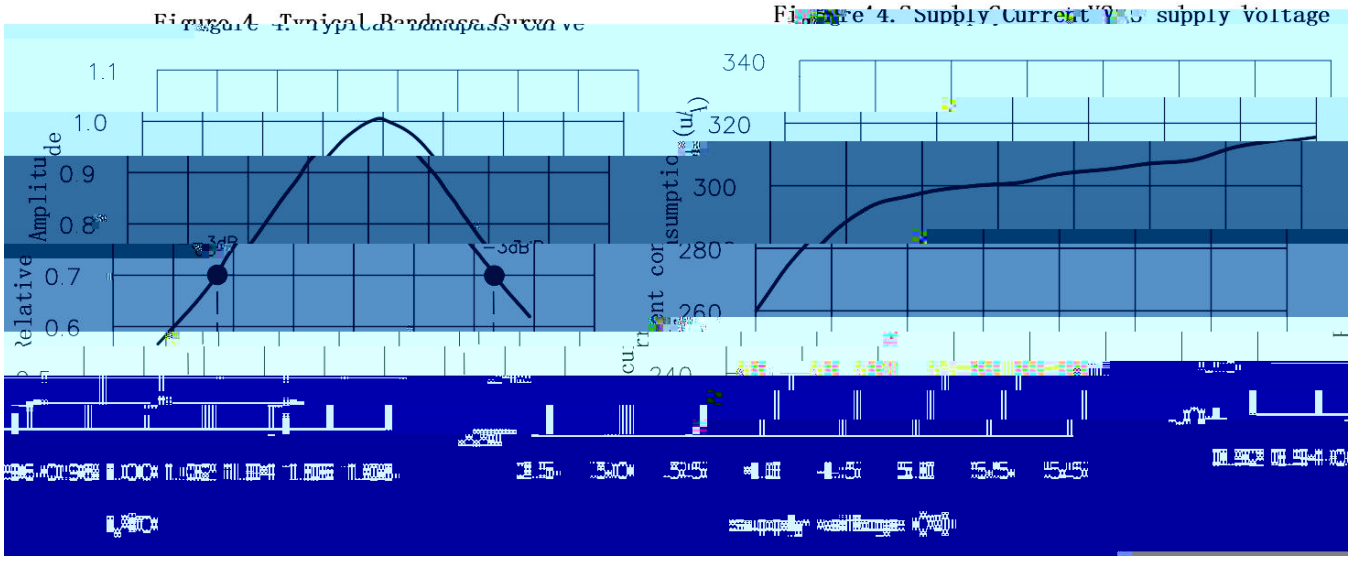

Figure 4. Supply Current VS supply voltage

可靠性试验

Reliability Test Items And Conditions

外形尺寸

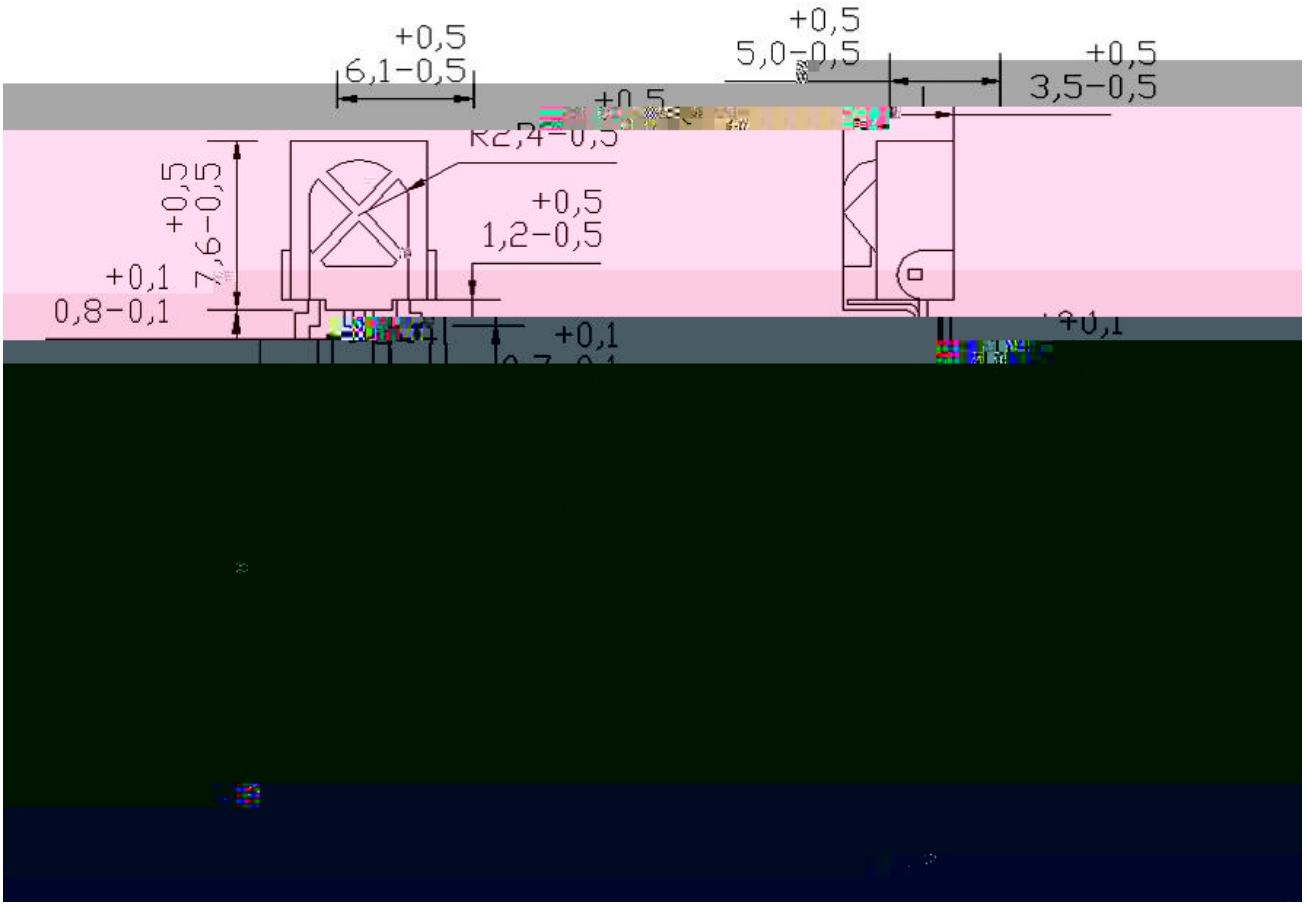

(Note)

Dimensions are in millimeters.

± 0.25

Tolerances unless mentioned are ± 0.25mm.

包装

*
In Bags

*
Moisture Proof and Anti-Electrostatic Foil Bag

使用注意事项（ ）

4Ò Ñ0n ù!)ˆp

This Infrared receiver head can be used in some ordinary electronic equipment, such as office equipment, communication equipment, house decoration, if LED is used in some high reliability requirements, such as air transportation, traffic control and medical liao equipment, must refer to the information provided by sales.

Storage environment: Infrared receiving head with temperature not exceeding 30 and relative humidity not exceeding 70%.It is recommended that Infrared receiver should be used in the original box for no more than three months. If longer storage time is required î L 3

使用注意事项（ ）

2mm

When welding, welding must be conducted below 2mm of colloid bottom. When welding, try to avoid soaking Infrared receiver head colloid. After welding, avoid adding external force on the pin or shaking Infrared receiver head colloid.

InGaN

HBM<1000V <100V

High increase of static electricity and current will damage Infrared receiver head. Use antistatic devices such as protective belts and gloves. Note: human discharge mode HBM <1000V; machine discharge mode <100V.

Sensitivity:The same product can be used on different devices,The actual data measured in different environments also varies.In different environments,Attention should be paid to the interference of the surrounding environment ,Interference of light and different light intensities ,Has an impact on the sensitivity of the infrared receiver head .

The infrared receiver head should have a filter to filter out white light Because, the strong light direct infrared receiving head Electromagnetic interference Equipped with stroboscopic light source and strong infrared heat source Under equal environmental conditions Infrared receiver head will affect reception

使用注意事项（ ）

9、其他事项：[redacted]