6070[redacted](3W)发光二极管

特点：C

应用领域（P）：

目录

电性参数

[redacted]

可靠性实验

[redacted]

包装

[redacted]

使用注意事项

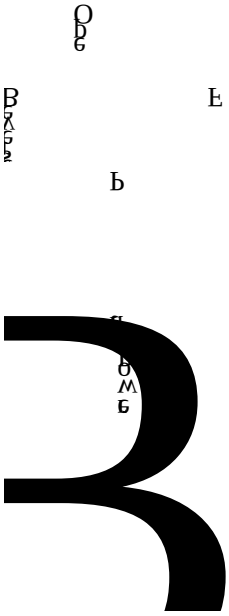

光电参数 Ta=25 (ta=25)

	γ β	
	LM	IF=350mA

γ β

典型特性曲线

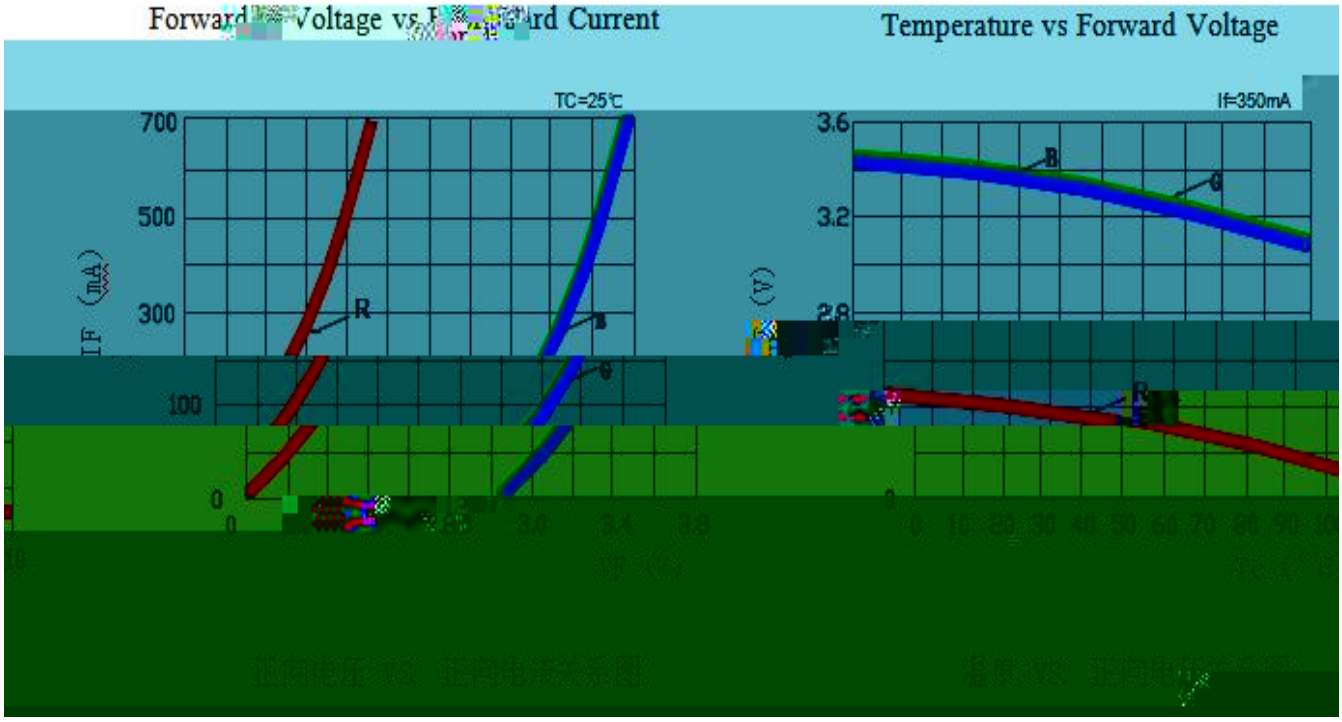

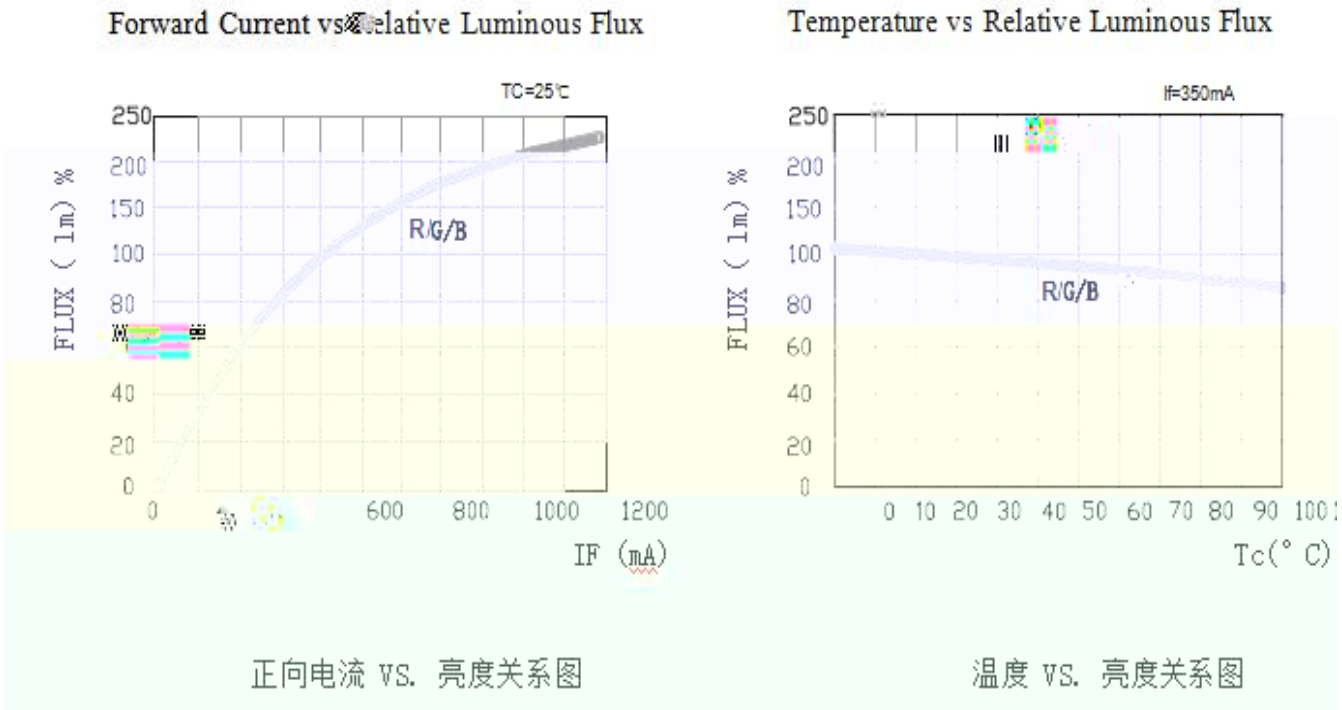

正向电流 VS. 亮度关系图　　温度 VS. 亮度关系图

外形尺寸

Outline Dimension

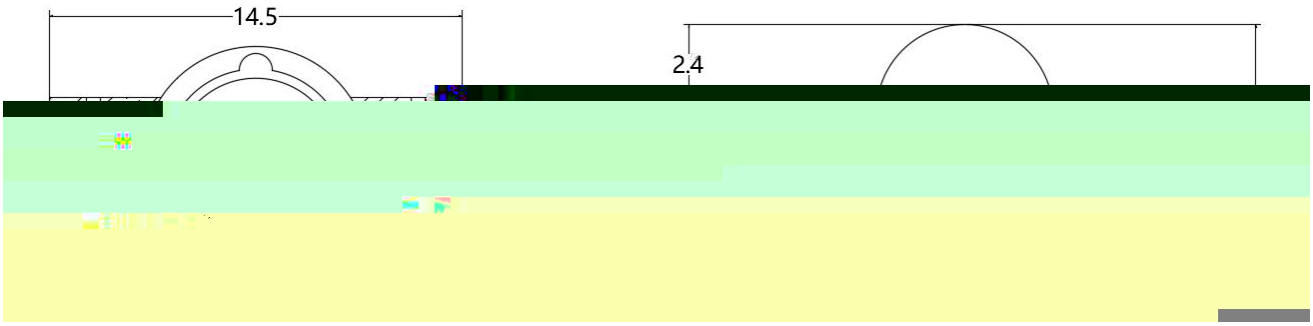

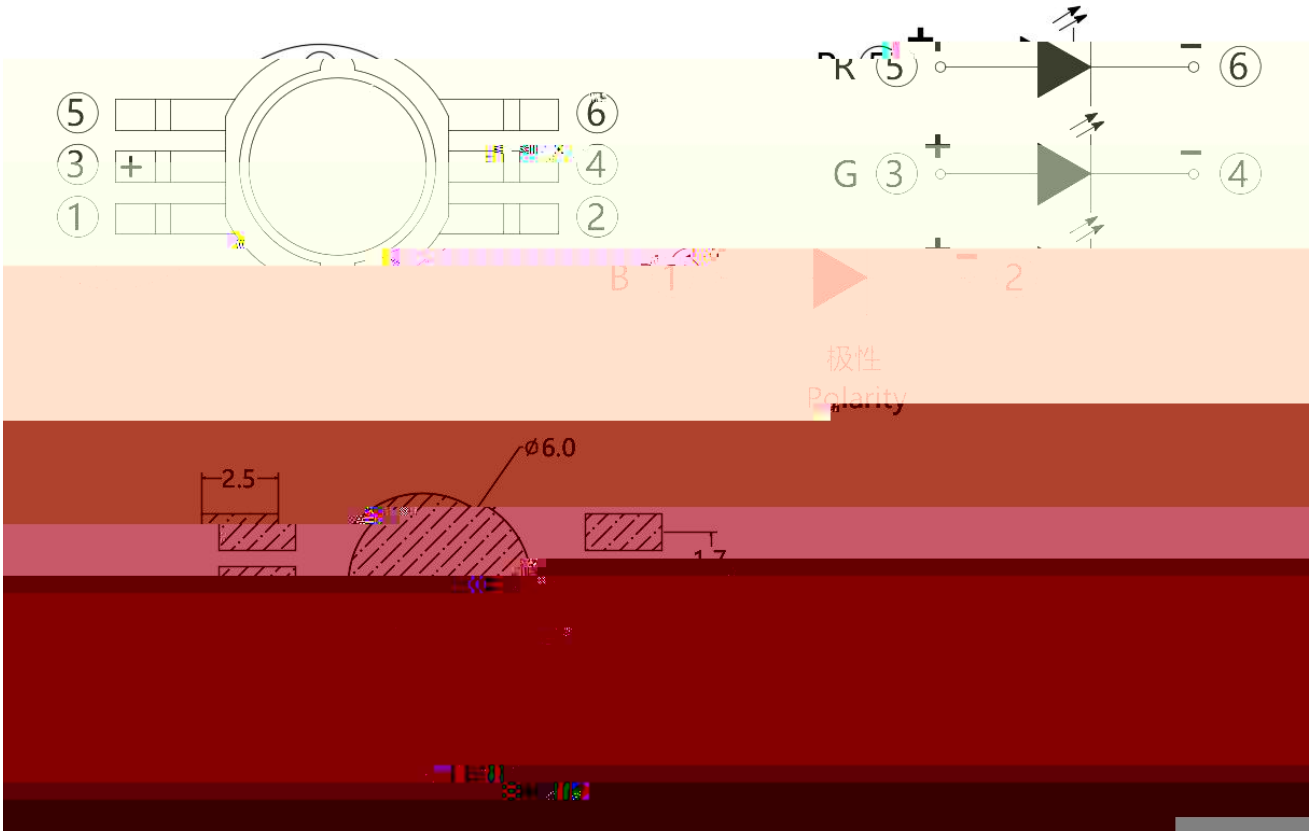

1. 单位为 mm

Remarks: All dimensions are in millimeters.

2. 未注公差为 ±0.25mm

Tolerance is ±0.25mm unless otherwise noted

使用注意事项（1）

Precautions (1)

使用注意事项（ ）

ŭ ج p ~ غج ج أ ١ ز ~ ذ ض
غ غج ~ ج ٧ ١ ز ≠ ج p غجضي

When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics. Excessive force to the encapsulant might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the LEDs are heated such as during Reflow Soldering.



LED № ~ ط r ⌂ № ض ŭ
Ṝ

The epoxy resin of encapsulant is fragile, so please avoid scratch or friction over the epoxy resin surface. While handling the product with tweezers, do not hold by the epoxy resin, be careful.

眼睛保护忠告

LED ŭ ۏ ~ ŭ ۏ ۏ ≠ ۏ LED ۏ ٮ

Viewing direct to the light emitting center of the LEDs, especially those of great Luminous Intensity, will cause great hazard to human eyes. Please be careful.