










典型特性曲线

Typical Characteristics Curves

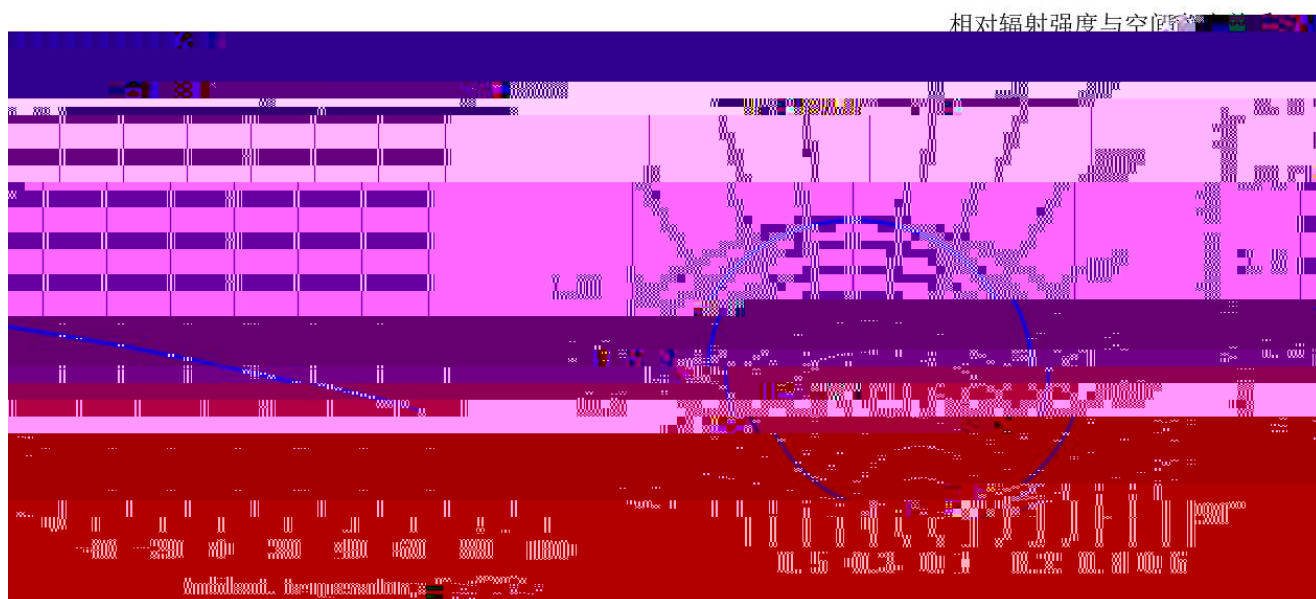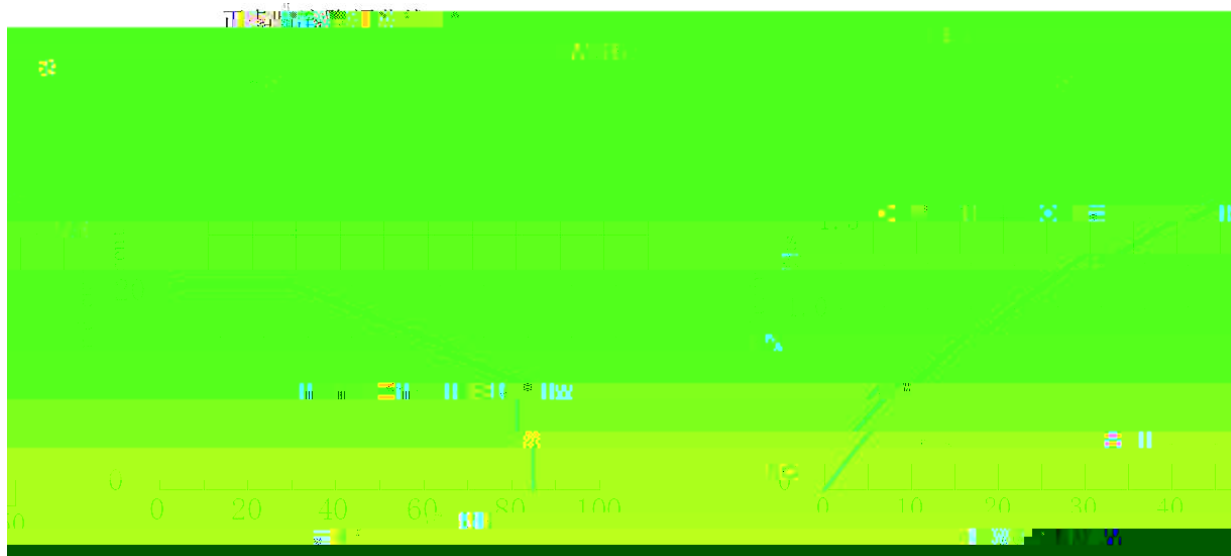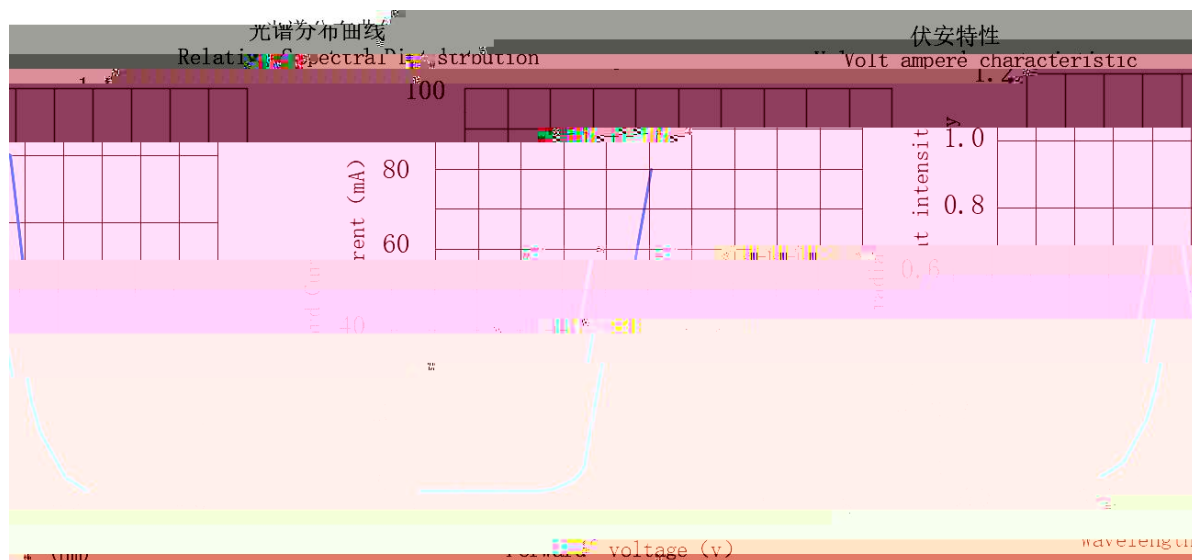

可靠性试验

Reliability Test Items And Conditions

Working life	20mA	Continuous lighting at the maximum rated current at room	1000	1000 hours	MIL-STD-750D:1026 MIL-STD-883D:1005 JIS C 7021:B-1
High temperature and high humidity test	IR-Reflow In-Board, 2 Times Ta= 85±5 , RH= 90 95%	240	± 2	240hours	MIL-STD-202F:103B JIS C 7021:B-11
Endurance test	High-temperature storage Low temperature	Ta= 85±5 Ta= -40±5	1000	1000 hours	MIL-STD-883D:1008 JIS C 7021:B-10 JIS C 7021:B-12
Cold and Hot cycle	105 25 -55 25 30mins 5mins 30mins 5mins	100	100	100 Circles	MIL-STD-202F:107D MIL-STD-750D:1051 MIL-STD-883D:1010 MIL-STD-202F:107D
Hot and cold impact	IR-Reflow In-Board, 2 Times -40 ± 5 20mins 20mins	100 ± 5	100	100 Circles	MIL-STD-750D:1051 MIL-STD-883D:1011 MIL-STD-202F:210A
Anti-tin test	T.sol= 260 ± 5	10 ± 1secs	2	2times	MIL-STD-750D:2031

Infrared

Environmental test

GypwRX







Packaging (2)

防潮抗静电包装袋 Moisture Proof and Anti-Static Bag

标签

标签

防潮抗静电包装袋





