XL-504IRC-940 F5 940 **技术数据表**

特点（ ）：

* :F5/5.5*5.0*8.7*28mm

Appearance dimension:F5/5.5*5.0*8.7*28mm

* : 940/

Luminous color and colloid: infrared emission 940/Transparent colloid

* ROHS

Environmental protection products Complied With ROHS Directive

* MSL :2

Moisture sensitivity level MSL : 2 levels

* EIA

EIA standard packaging

*

High energy efficiency, fast startup

应用领域（ ）：

*

Medical equipment

*

Infrared remote controller

*

Camera monitoring head

*

Industrial control: counters, thermal imaging, smart meter

*

Infrared photoelectric switch

*

Wireless communication and signal transmission

* ,

Intelligent car, robot



目录

Catalogue

电性参数

Power consumption	Pd	55	mW
Max continuous working current	IF	30	mA
Peak Forward Current	IFP	100	mA
Reverse breakdown voltage			

辐射强度:

代码	最小值	最大值	单位	测试条件

电压分档

:

波长分档

:

外形尺寸

（Note）

1.

Dimensions are in mill_. ž

包装（ ）

*
In Bags

*
Moisture Proof and Anti-Electrostatic Foil Bag

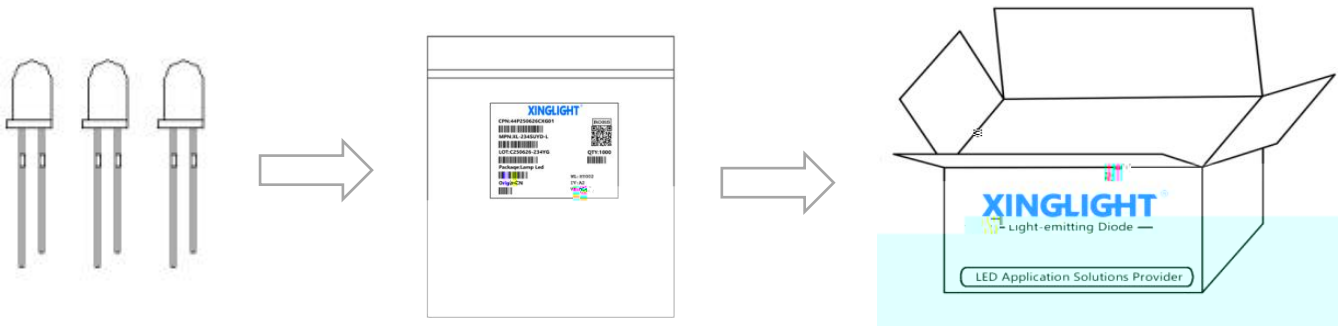

◇ 标签说明 Label Expantion

使用注意事项（ ）

1.
LED LED

This LED can be used in some ordinary electronic equipment, such as office equipment, communication equipment, house decoration, if LED is used in some h

使用注意事项（ ）

2mm LED
LED

When welding, welding must be conducted below 2mm of colloid bottom. When welding, try to avoid soaking LED colloid. After welding, avoid adding extern ` s

使用注意事项（ ）