









典型特性曲线

Typical Characteristics Curves

Fig.1- Relative Radiant Flux vs. Forward Current


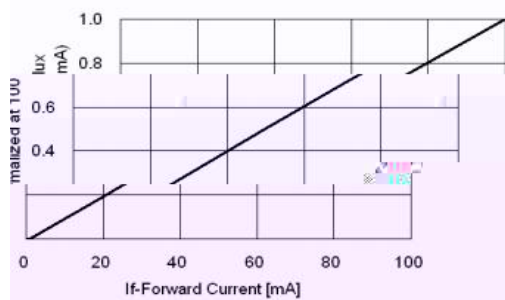


Fig.2- Forward Current vs. Forward Voltage

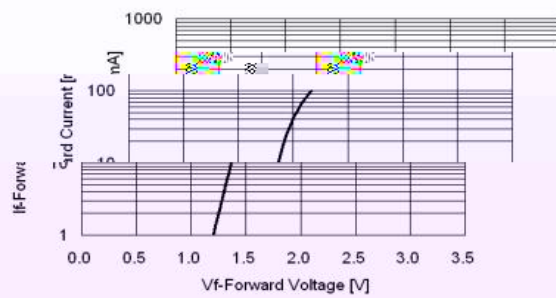

Relative Radiant Flux (@100mA) vs. Ambient Temperature



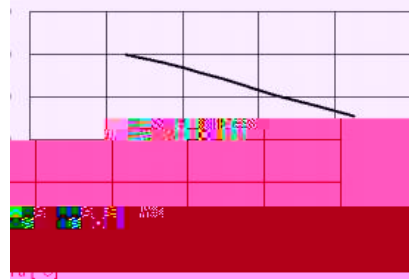


Fig.4-Forward Voltage (@100mA) vs. Ambient Temperature

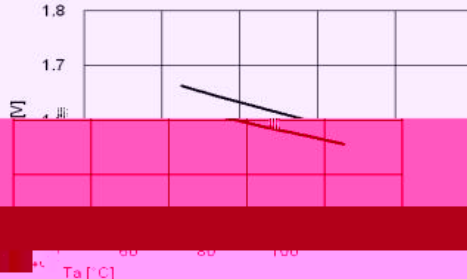

LED

(50mA) Intensity distribution curve (50mA test)

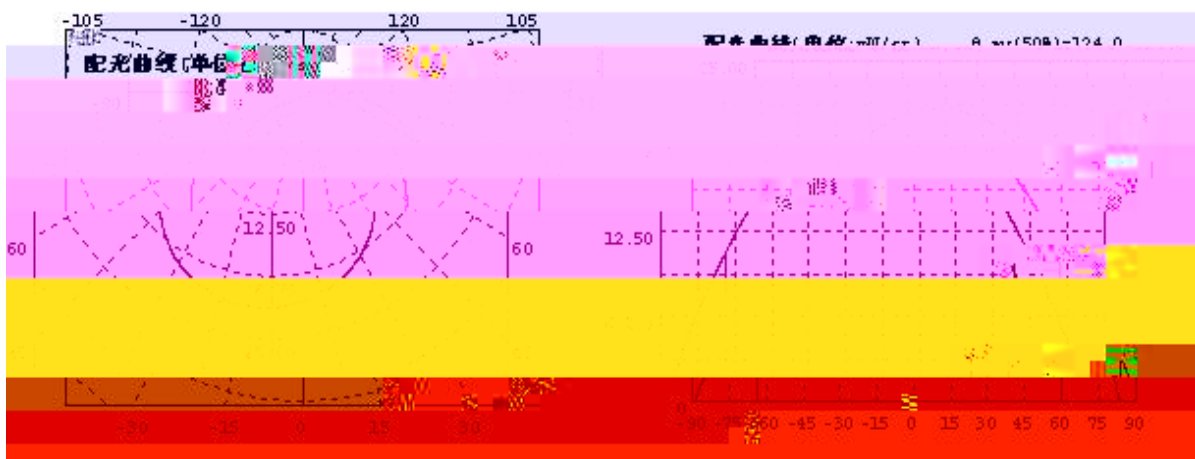






BLIGHT®

IP68088144-0000

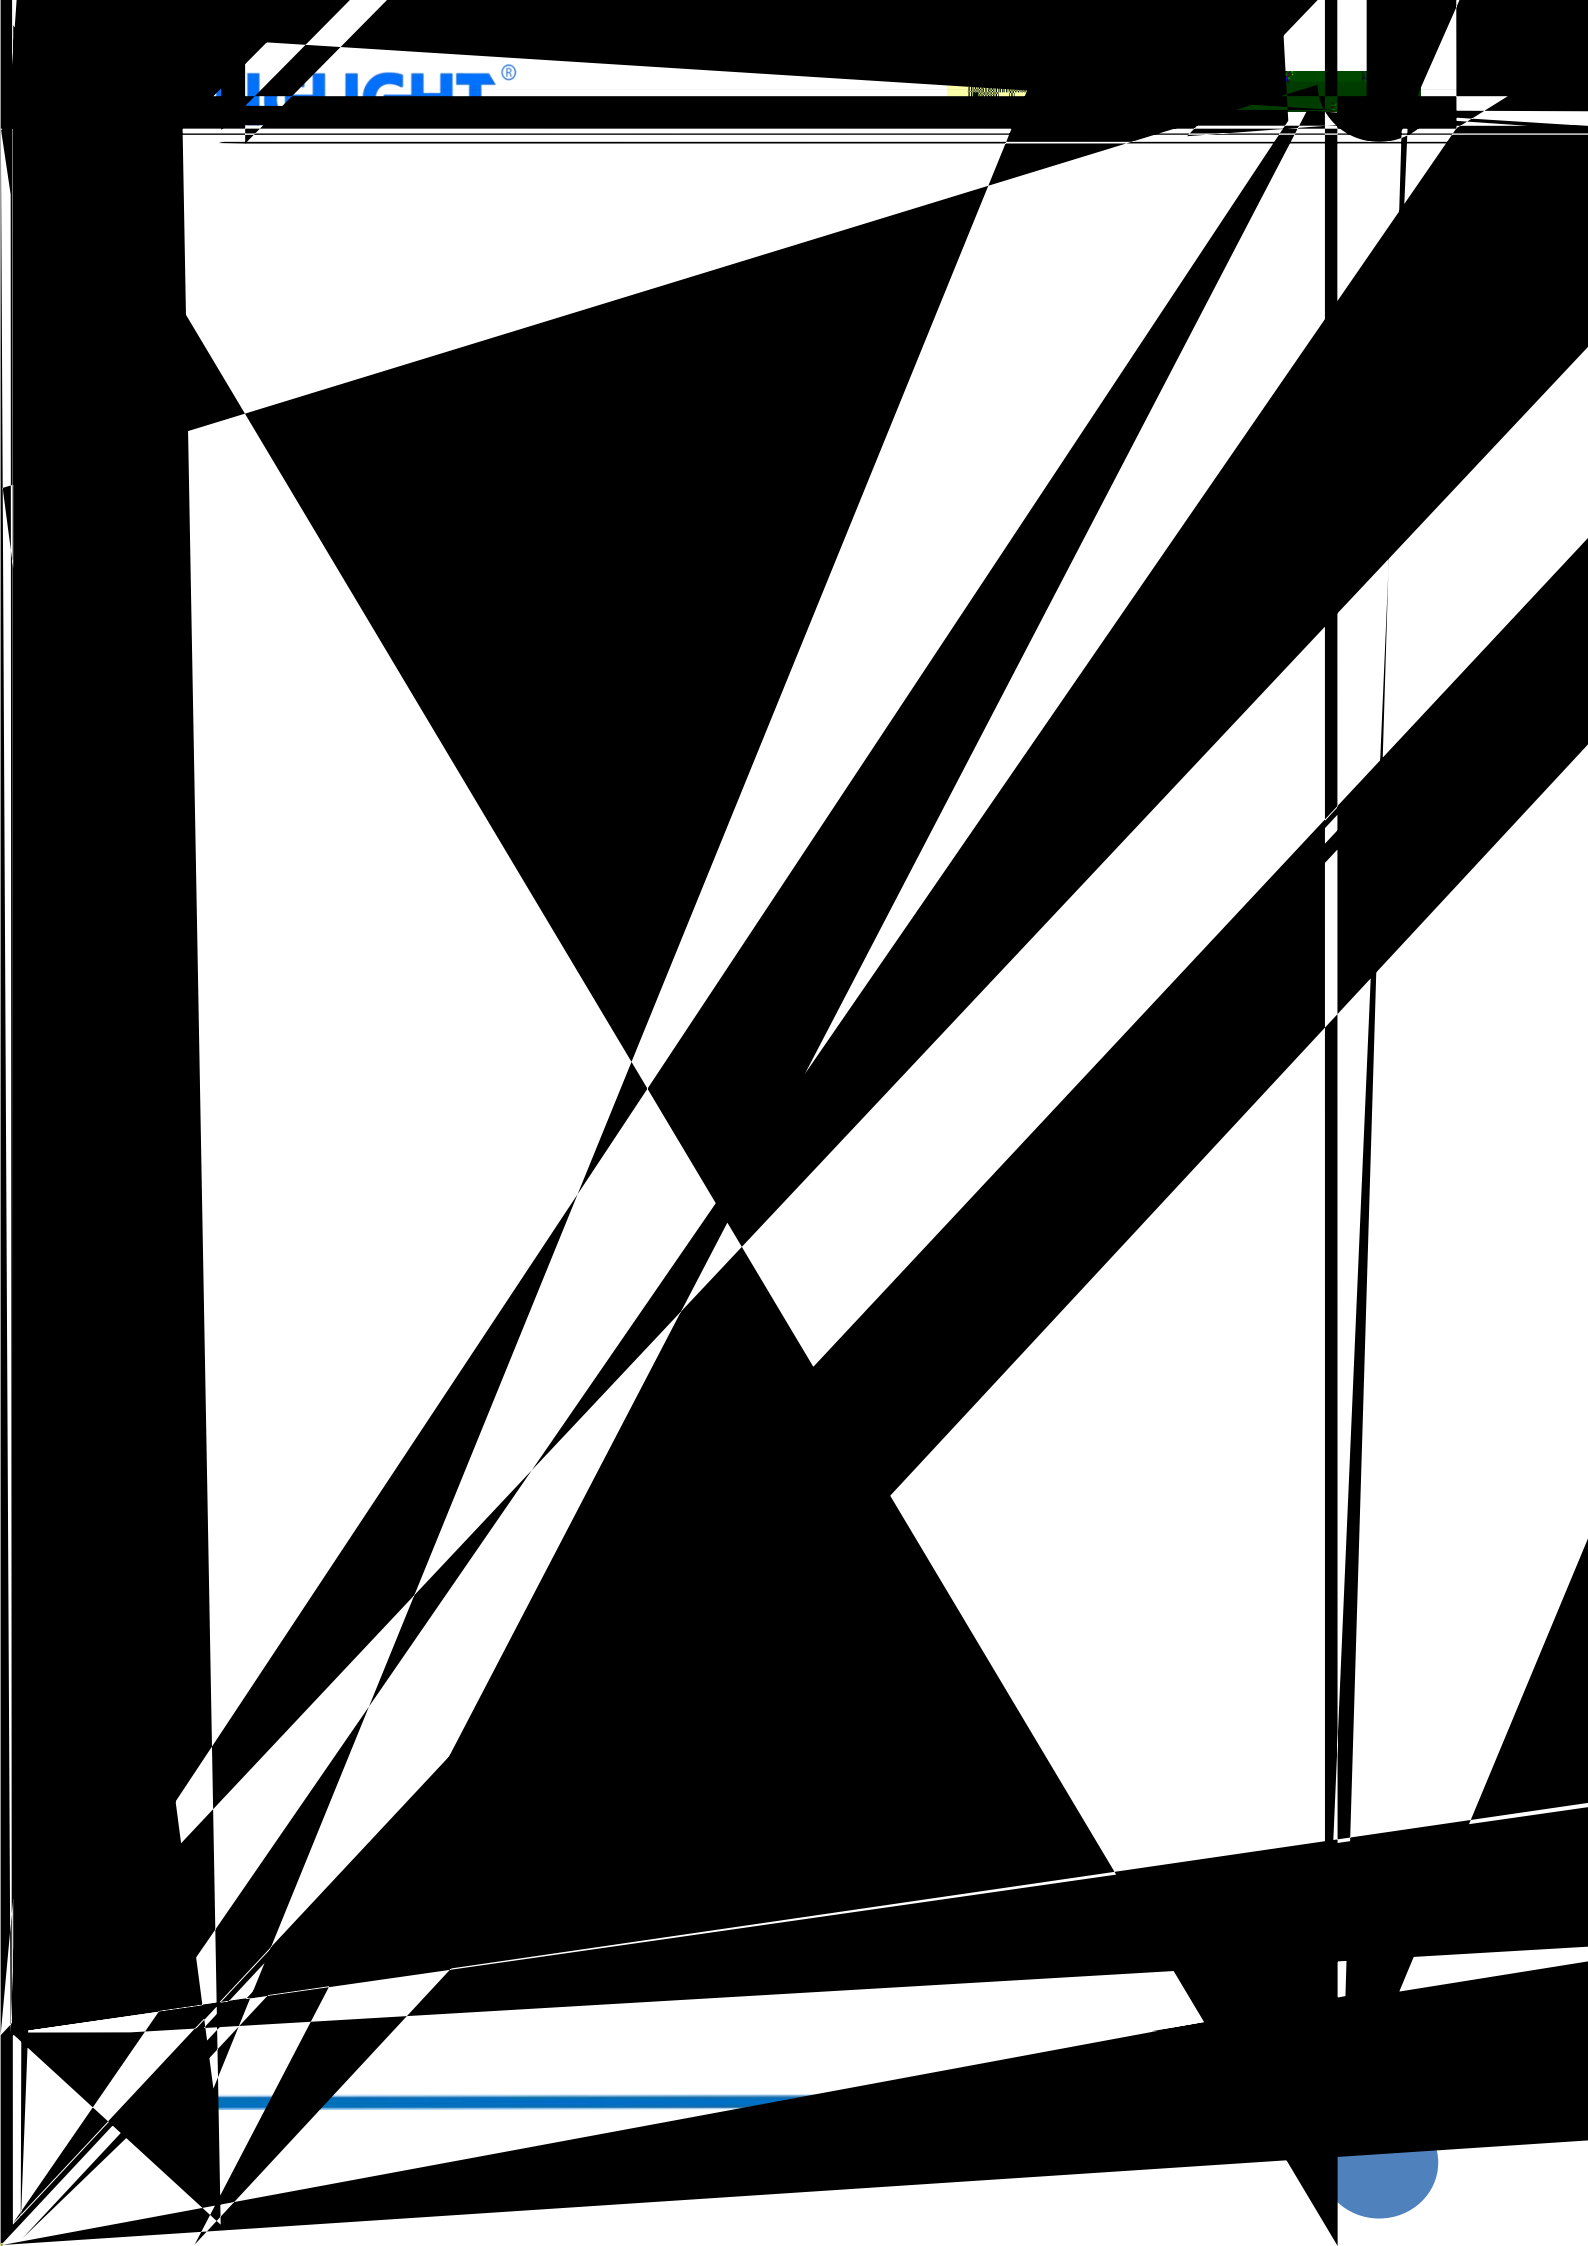

Guideline for Solder

Hand Soldering

~~P~~À E A3P0 W

3

30



Resolutions (1)

After opening the package, the

Precautions (2)

3. **Redacted text**

È b

Ännu en »

Ämne » _____

