



目录

电性参数

典型特性曲线

可靠性实验

外形尺寸

包装

焊接指导

使用注意事项











standard	project	Test conditions	Failure criteria
	$\overset{3}{C} \\ C\ddot{U}oX\dot{I}o\acute{S}\ \Phi\ddot{U}P\ddot{U}I^{\circ}\S\ \overset{3}{C}$	$L_c\ \Psi!$	$\S\ \{\ [$
1	$\overset{L}{3} \\ [\mathbb{Q}^{\circ}I\acute{U}\ \mathbb{Q}\acute{U}\S\Omega\sigma\mathbb{U}\mathbb{U}\ \ \overset{L}{3}$	$L_c\ \Psi!$	$[\ \{\ [$
	$\overset{L}{w} \\ w\S\Phi\S\sigma\sigma\S\ \acute{O}\check{I}oo\S\Omega\acute{U}\ \overset{L}{w}$	$\overset{3}{w}\ \overset{3}{3}$	$\S\ \{\ [$
2			




4" R 00" JEON




包装 (2)

Packaging (2)

◇ 防潮防静电包装 Moisture Proof and Anti- Electrostatic Foil Bag

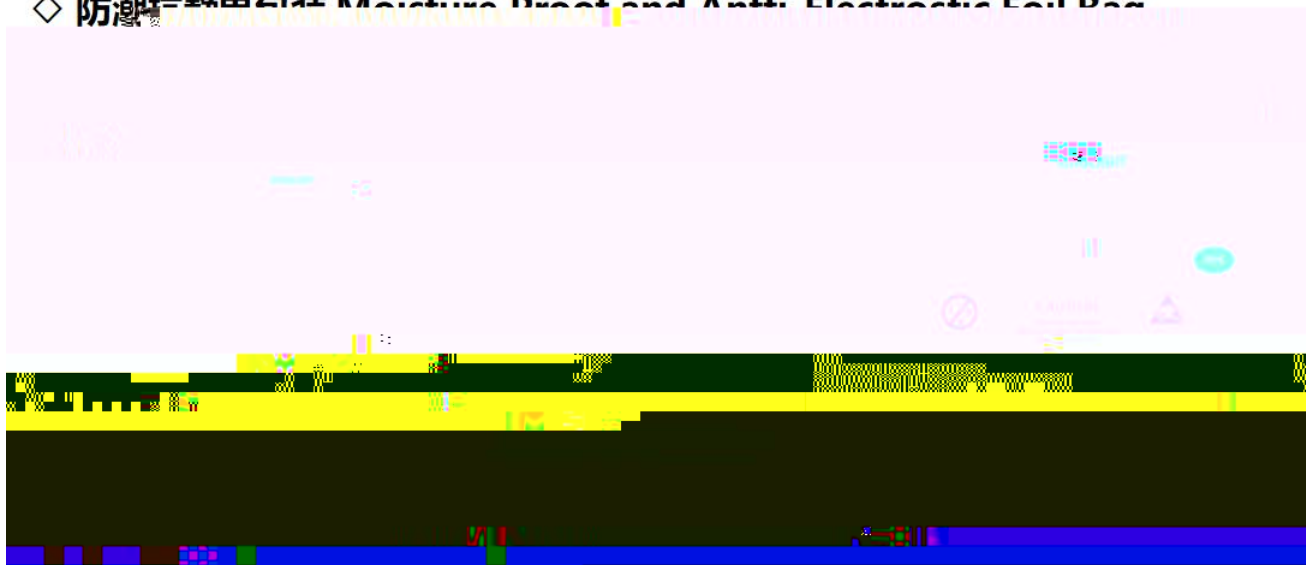

◇ 外包装纸箱 External Cardboard Box

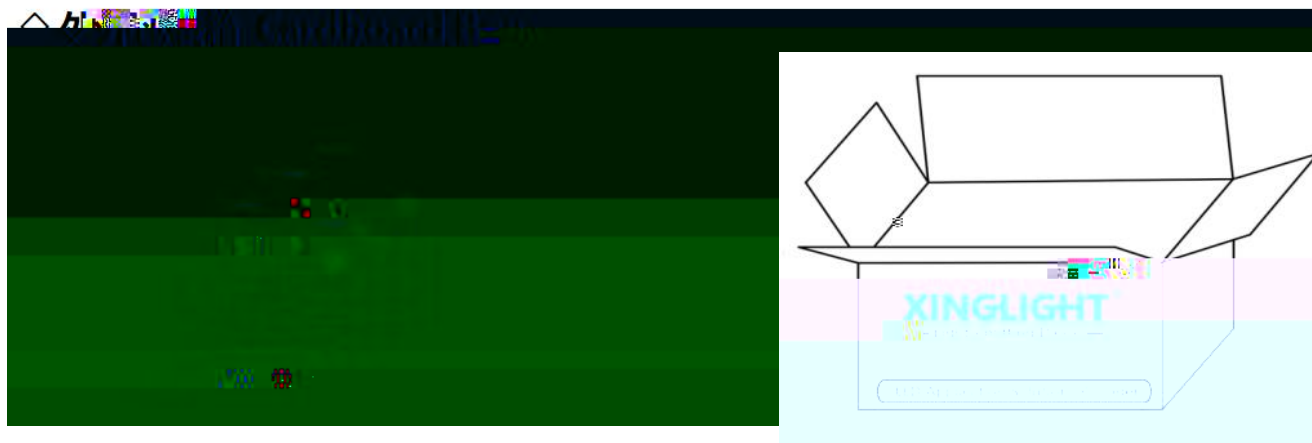

◇ 标签说明 Label Expantion









使用注意事項（2）

Precautions (2)

設計建議

LED



