目录

电性参数

典型特性曲线

可靠性实验

外形尺寸

包装

焊接指导

使用注意事项

亮度分档

:

代码	最小值	最大值	单位	测试条件
E2	400	450	mcd	IF=20mA
E3	450	500		
E4	500	550		
E5	550	600		
F3	1300	1450		
F4	1450	1600		
F5	1600	1800		

电压分档

:

代码	最小值

包装（2）

Packaging (2)

◇ 防潮抗静电包装 Moisture Proof and Antti-Electrostic Foil Bag

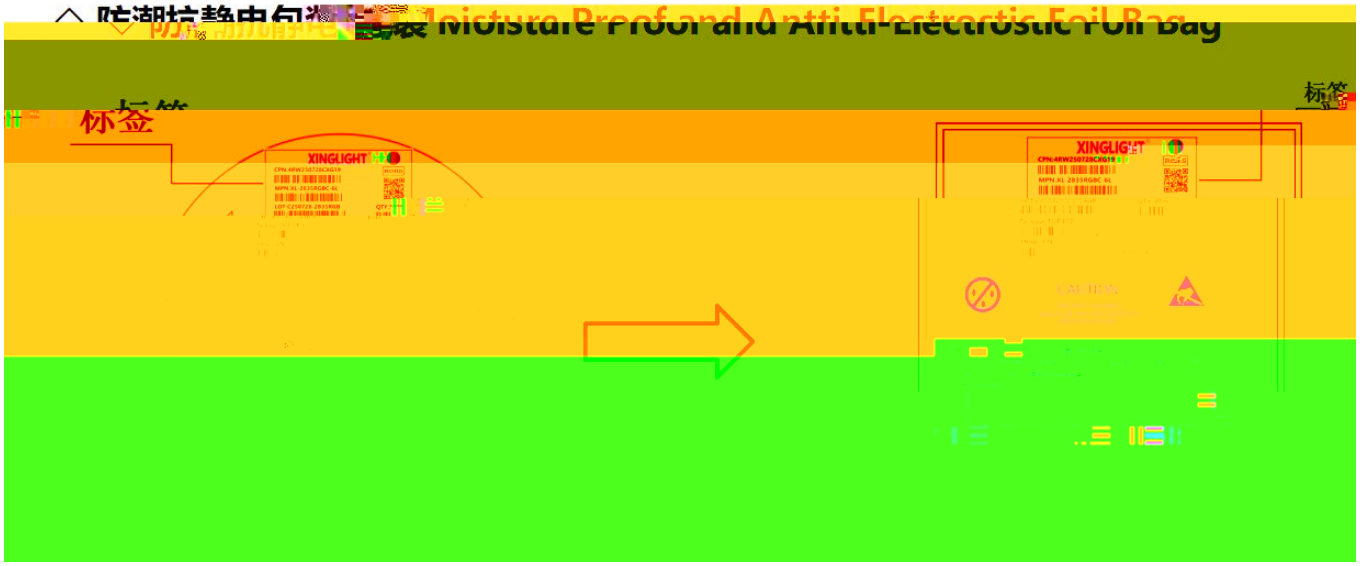

◇ 外包装箱 Cardboard Box

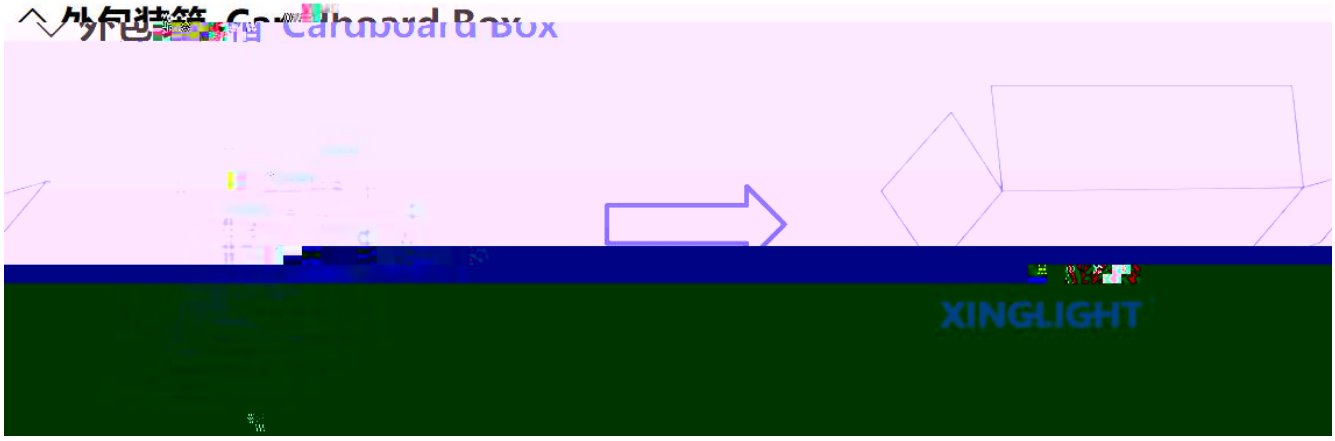

◇ 标签说明 Label Expantion

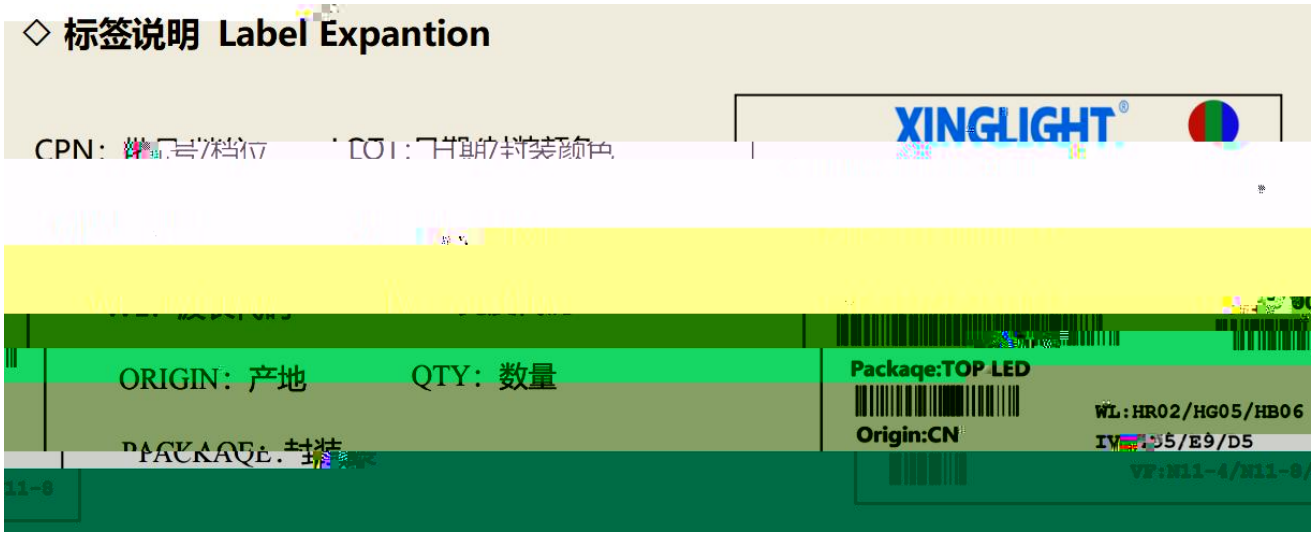

使用注意事项（1）
utions (1)

贮存：

Moisture proof and anti-electrostatic package with moisture absorbent material is used, to keep moisture to a minimum.

30 60%RH

Before opening the package, the product should be kept at 30 or less and humidity less than 60% RH, and be used within a year.

30 40%RH 168 7

30 60%RH

After opening the package, the product should be stored at 30 or less and humidity less than 40%RH, and be soldered within 168 hours (7 days). It is recommended that the product be operated at the workshop condition of 30 or less and humidity less than 60%RH.

LED

60 5 24

If the moisture absorbent material has fade away or the LEDs have exceeded the storage time, baking treatment should be performed based on the following condition: (60 5) for 24 hours.

静电：

Static electricity or surge voltage damages the LEDs. Damaged LEDs will show some unusual characteristic such as the forward voltage becomes lower, or the LEDs do not light at the low current. even not light.

Devices, equipment and machinery must be properly grounded. At the same time, it is recommended that wrist bands or anti-electrostatic] Â

XINGLIGHT®