

Photo Relay

XLM4401





Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Fig.7 LED dropout voltage vs. Ambient temperature characteristics

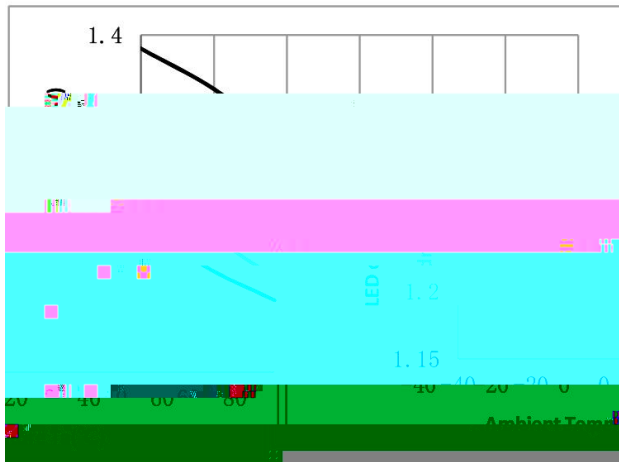


Fig.8 Output current vs. Output voltage

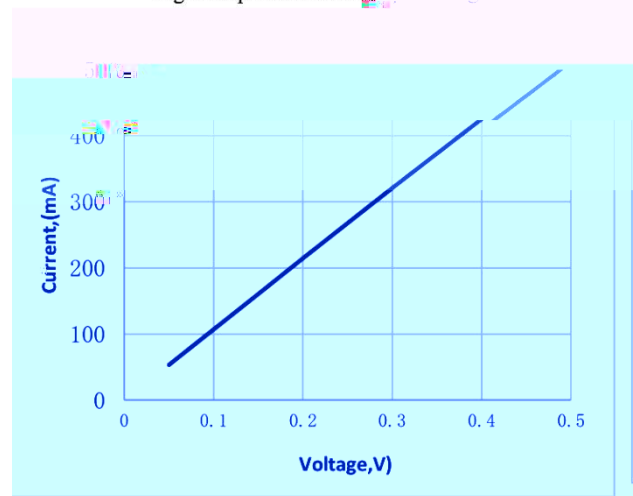


Fig.9 Off state leakage current vs. Load voltage characteristics




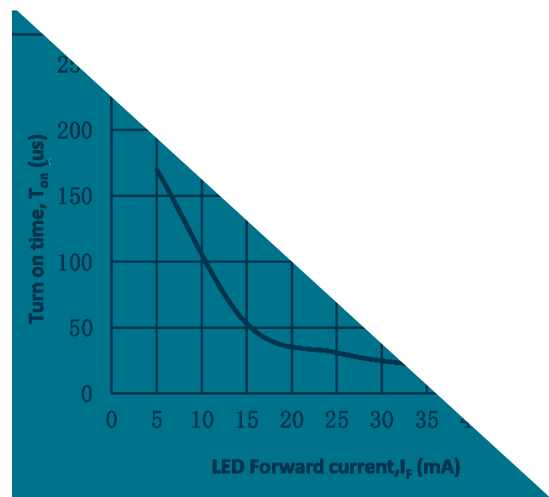


Fig.11 LED turn-off time vs. Forward current

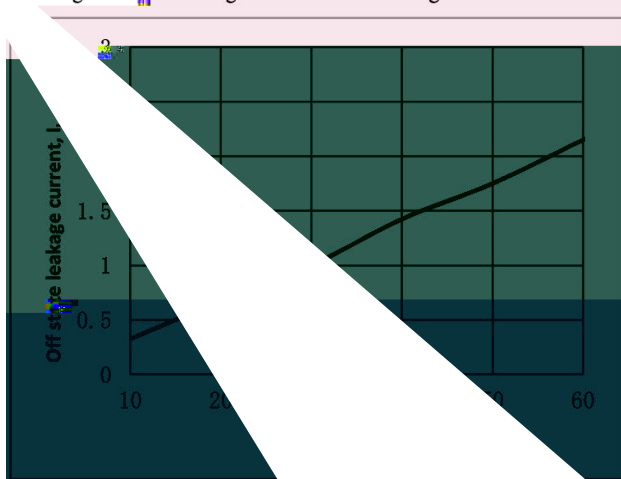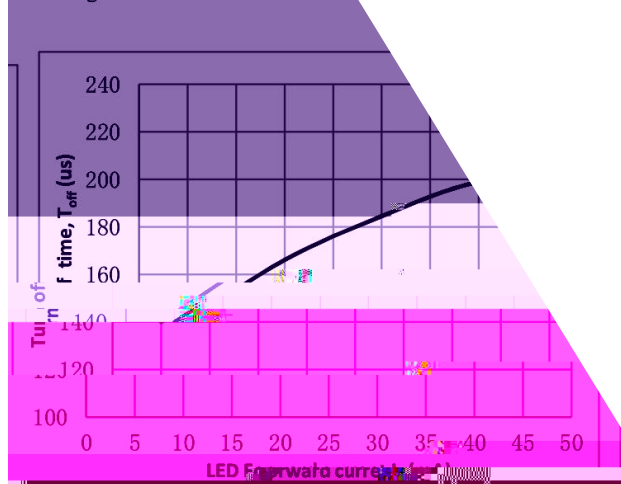

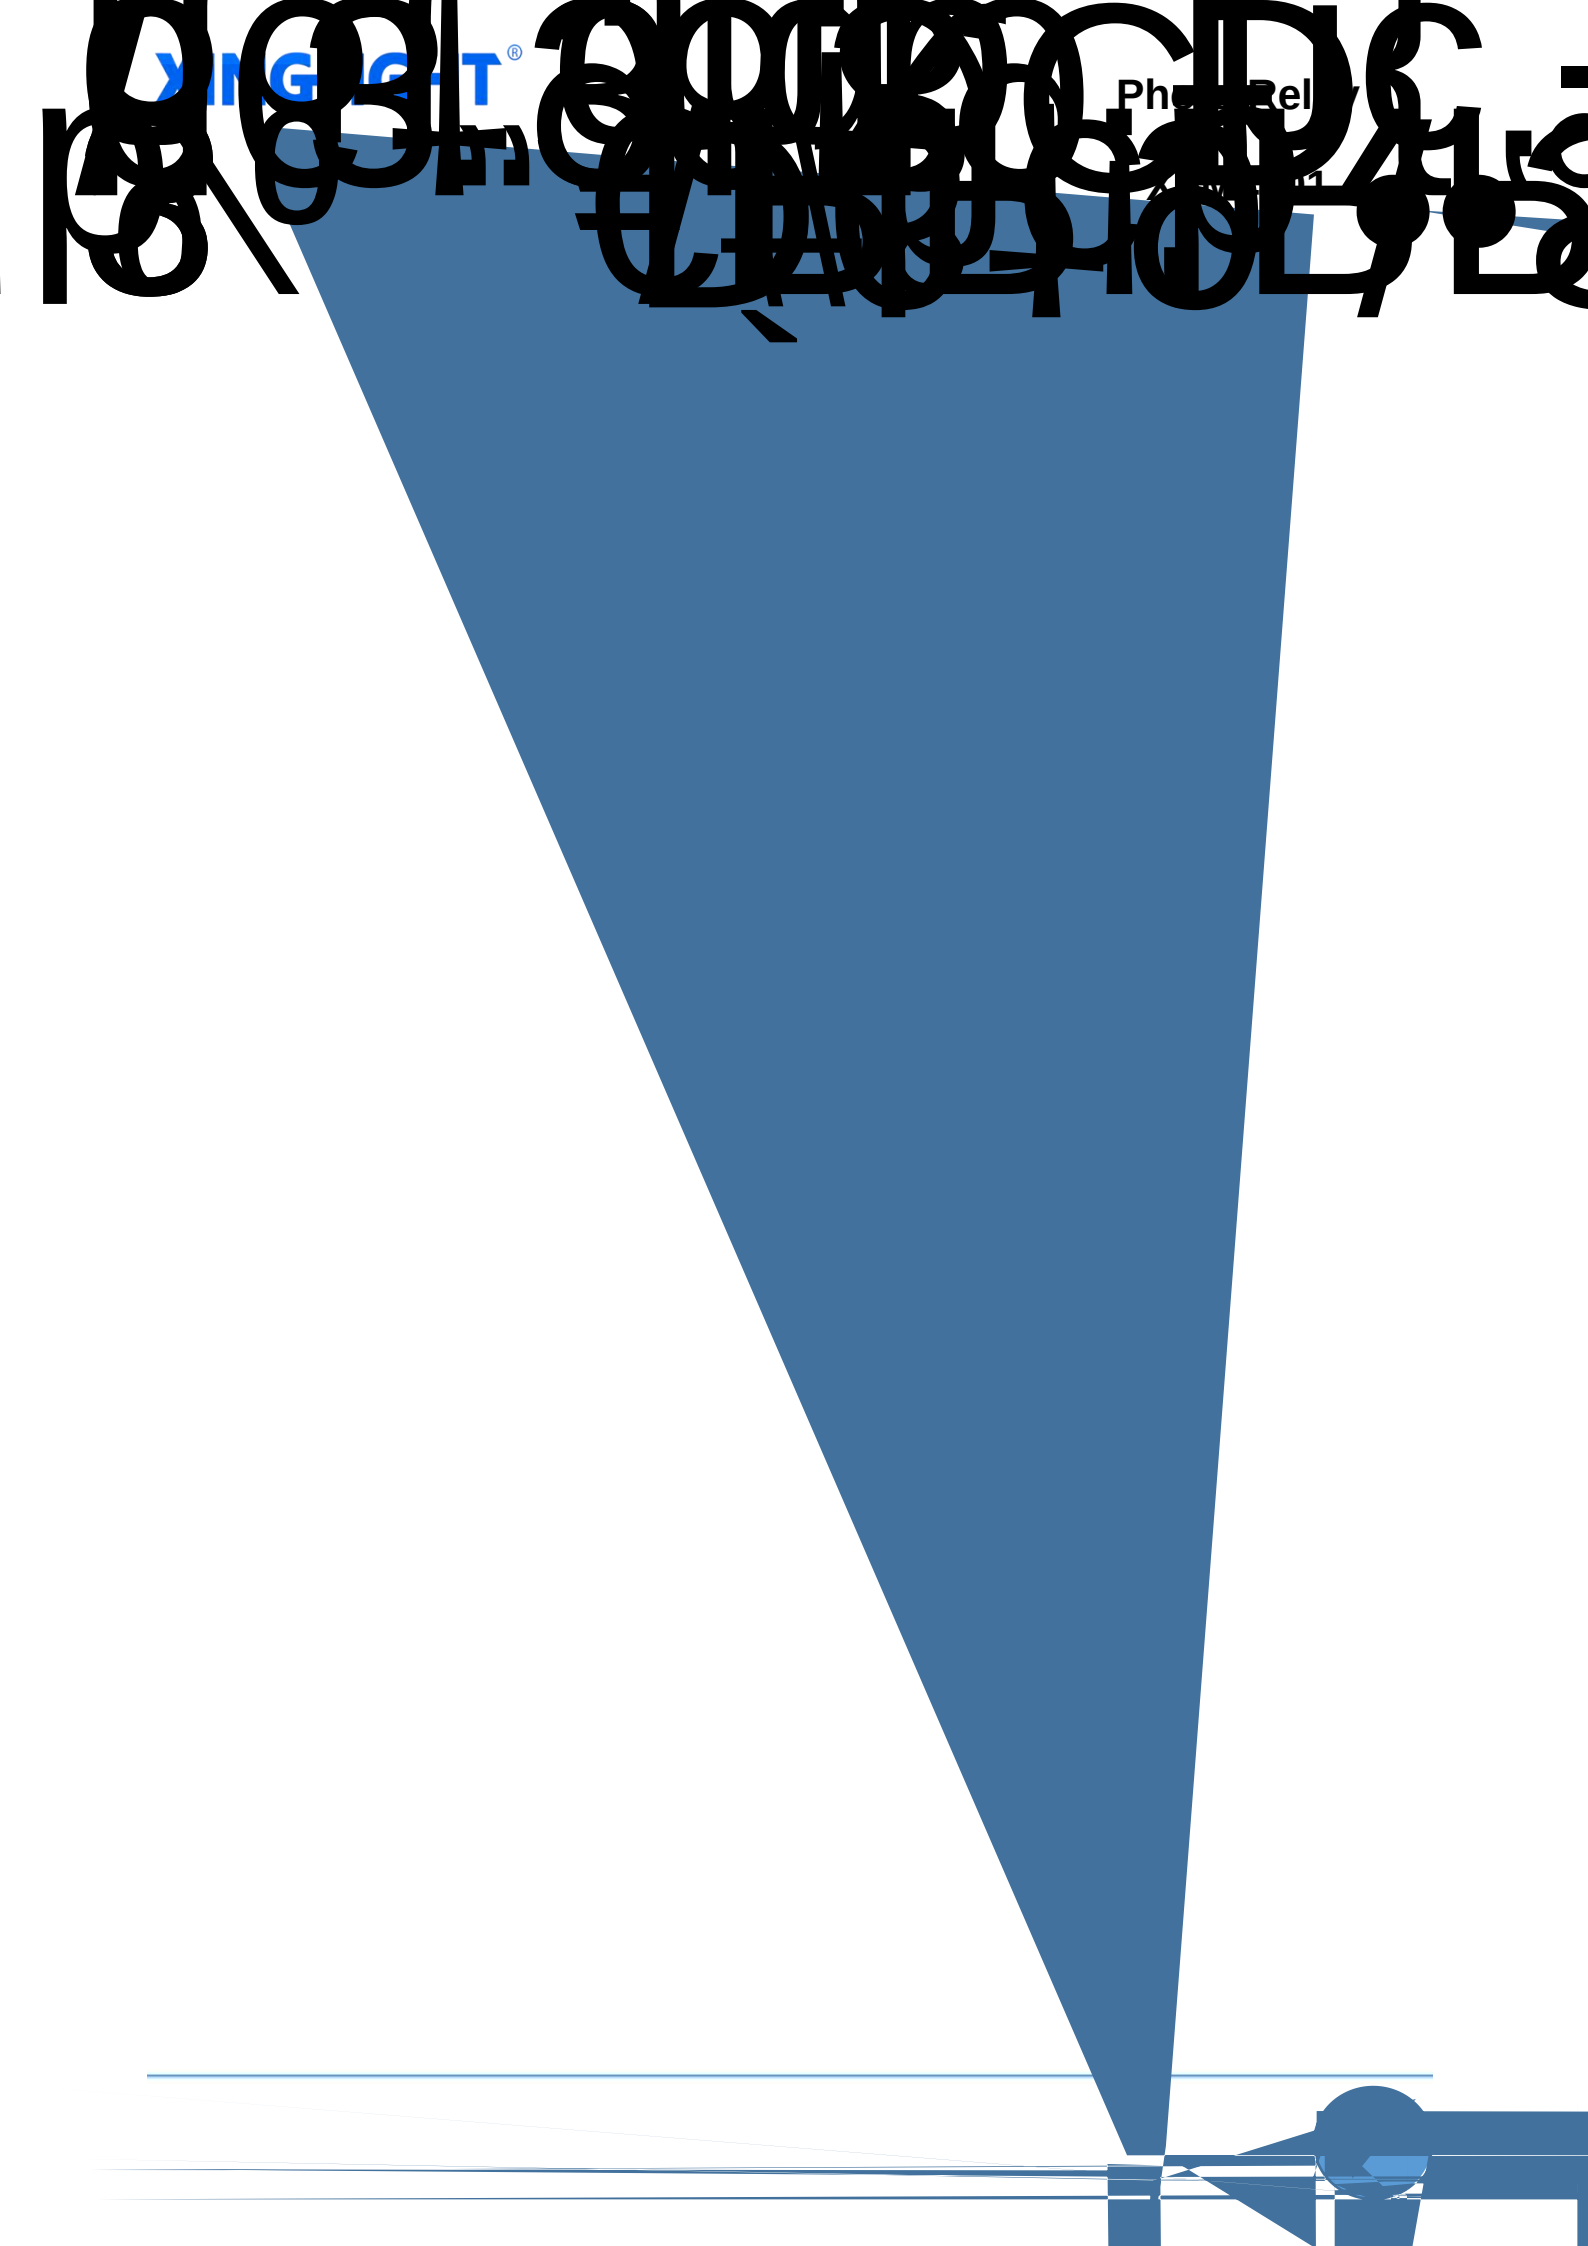

Reflow soldering

	Symbol	Min	Max	Unit
Preheat temperayure	Ts	150	200	
Preheat time	ts	60	120	

