High speed optocoupler

XLM453

XLM453

Switching Characteristics (@ T_A = -40°C 85°C, V_{CC}= 5V, I_F= 7.5mA, unless otherwise specified)

Parameter	Symbol	

High speed optocoupler

XLM453

tings and Characteristics Curves (@ T_A = 25°C unless otherwise specified)

Package Outline Dimensions (unit: mm)

SOP5

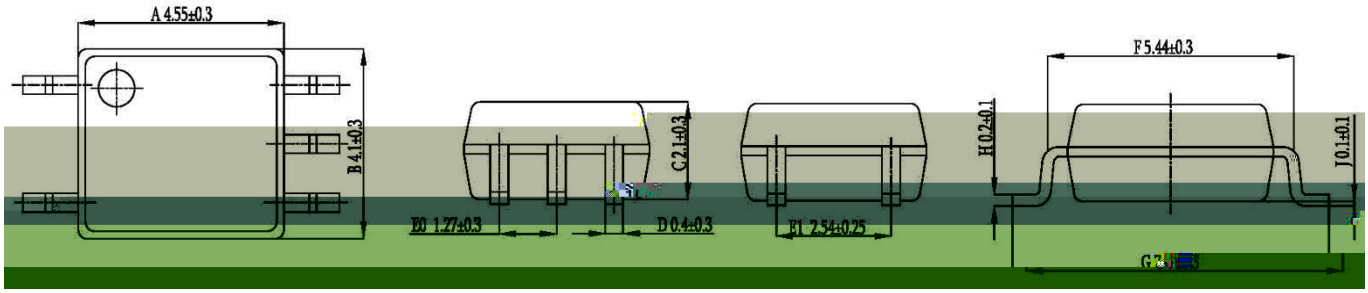

SOLDERING FOOTPRINT (unit: mm)

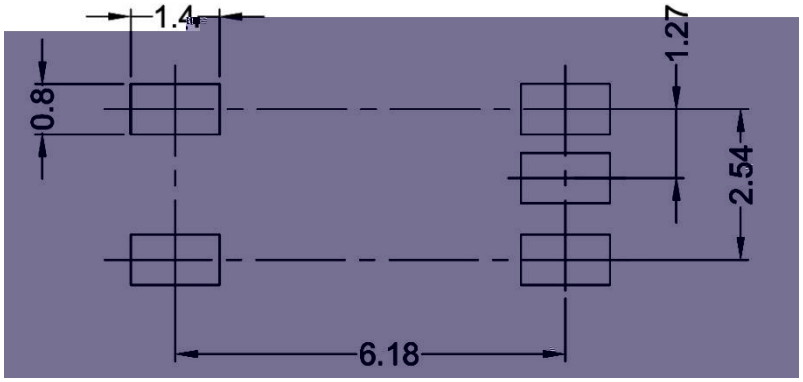

Reflow soldering

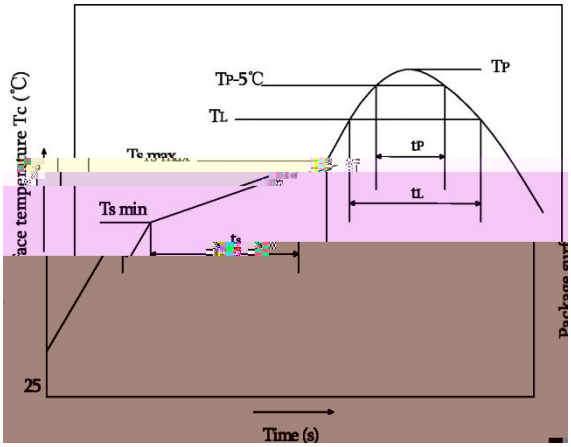

	Symbol	Min	Max	Unit

Reflow soldering is recommended at the temperatures and times shown, no more than three times.

Wave soldering

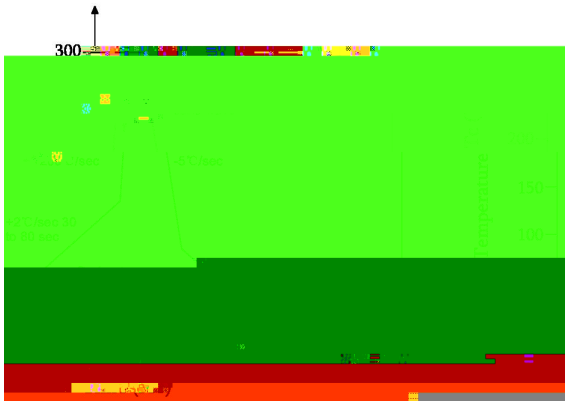

Profile feature	
	~
	~
	>

Soldering with hand soldering iron

A. Hand soldering iron is only used for product rework or sample testing.

B. Hand soldering iron requirements:Temperature:360 +5 within 3s.

High speed optocoupler

XLM453