XINGLIGHT®

Photo transistor

XL817

XINGLIGHT®

Photo transistor

XL817

XINGLIGHT®

Photo transistor

XL817

XINGLIGHT®

Photo transistor

XL817

Ratings and Characteristics Curves (@ T_A = 25°C unless otherwise specified)

Fig.7 Collector-emitter Saturation Voltage vs. Ambient Temperature

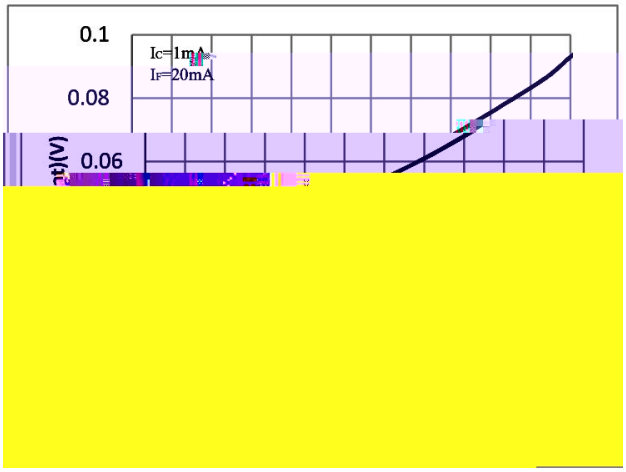

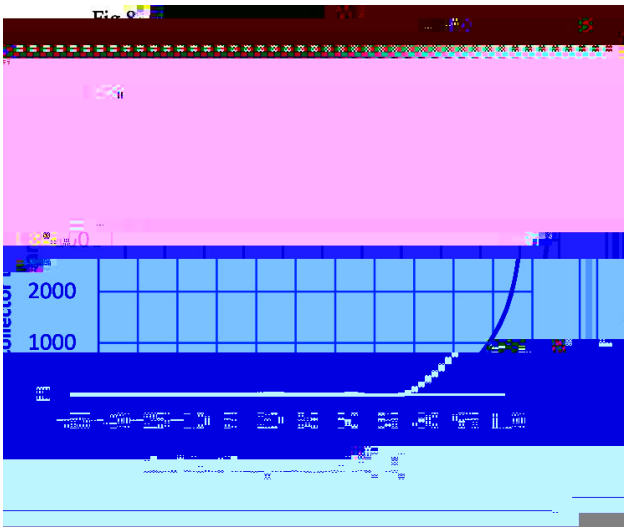

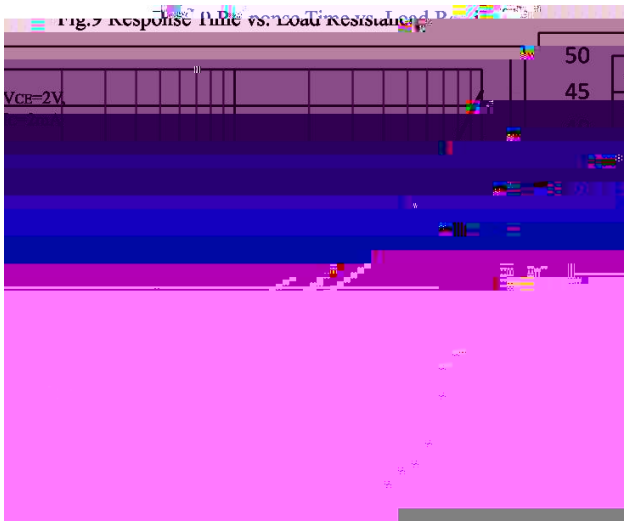

Fig.10 Frequency Response

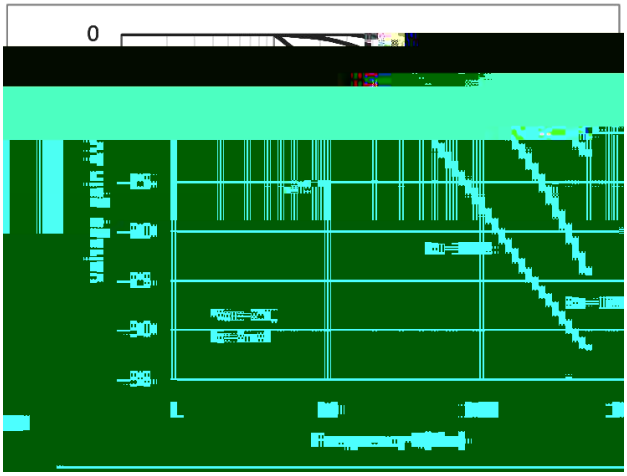

Fig.11 Collector-emitter Saturation Voltage vs. Forward Current

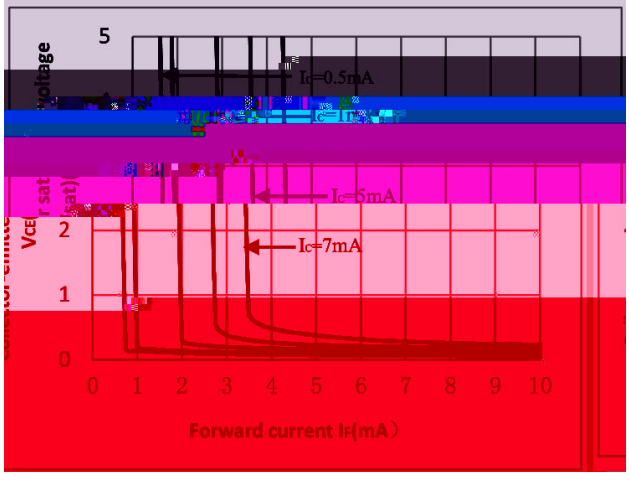

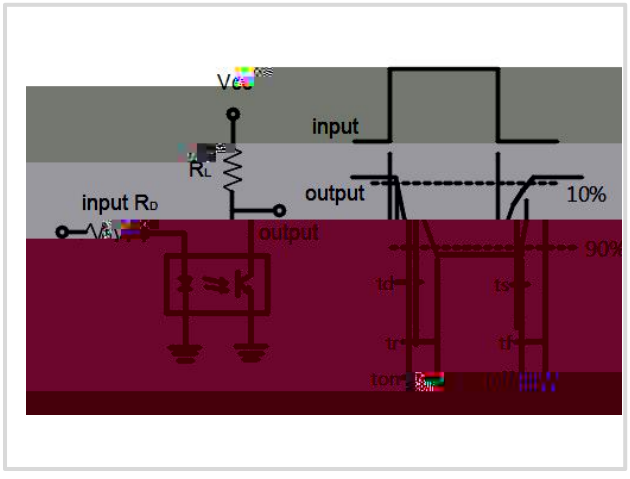

XINGLIGHT®

Photo transistor

XL817

XINGLIGHT®

Photo transistor

XL817

Photo transistor

XL817

ing

	Packing	per eel	Quantity per Box	Quantity per Carton	A	ation	Carton Specification	Note
4	Tube(500mm	ube				520*105*50mm	545*372*235mm	Straight insert type material tube
-M	Tube(500mm	ube	50 tubes /box	10 boxes/ctn		520*105*50mm	545*372*235mm	Seagull foot (M foot) tube
4	Reel(ϕ330mm	/reel	2 reels /box	10 boxes /ctn	3	350*340*60mm	365*330*370mm	Guard band 200mm /min.

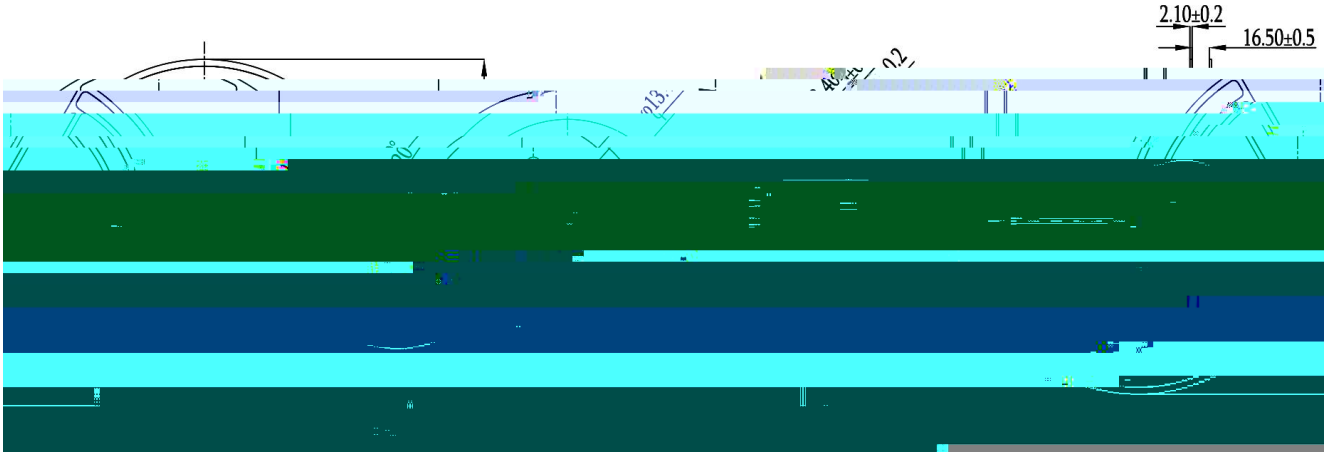

Attention