







Fig.1 LED Positive voltage vs Positive current

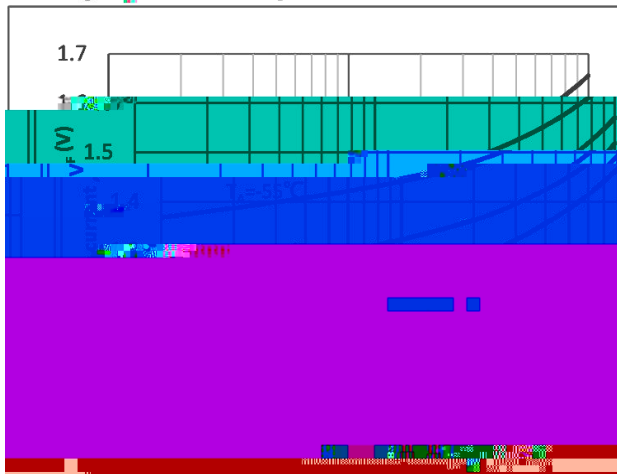


Fig.2 On-state characteristic

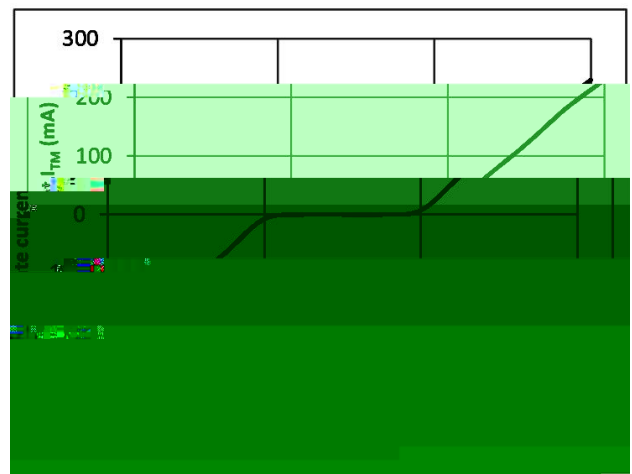


Fig.3 Trigger current vs Ambient temperature

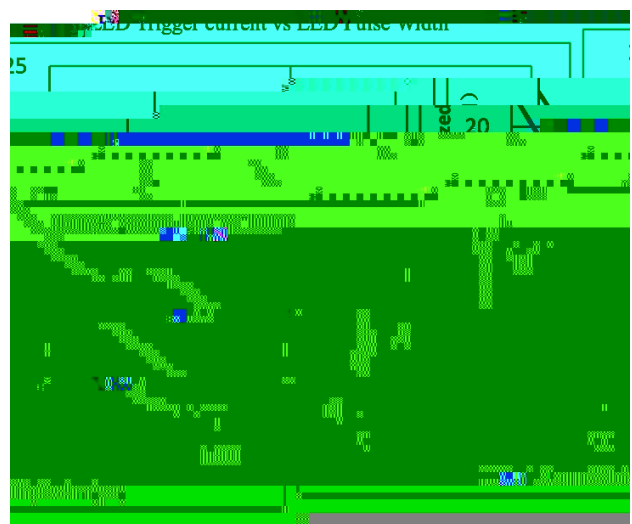
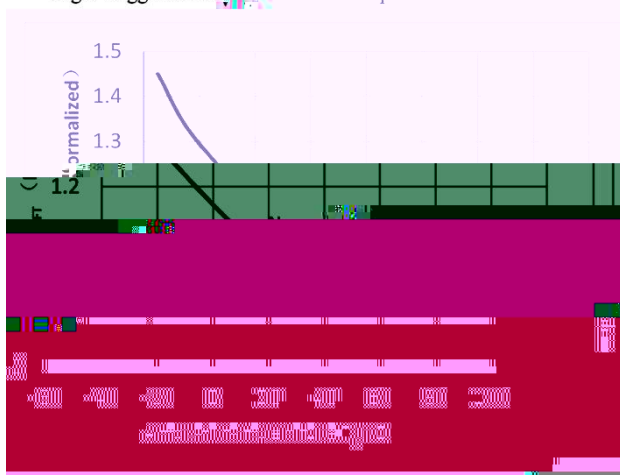


Fig.5 Holding current vs Temperature



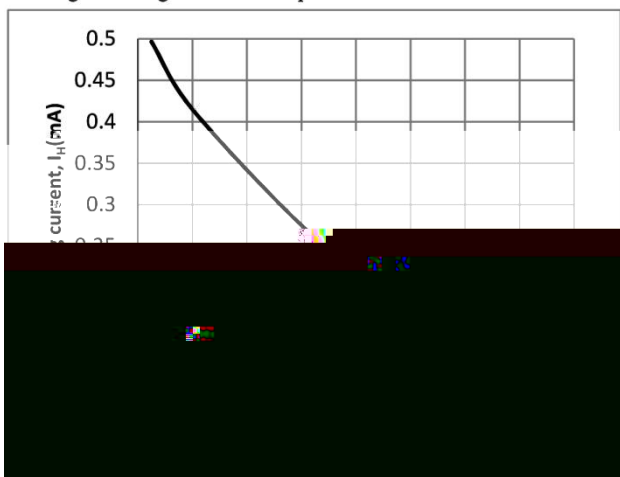


Fig.6 Leakage current vs Temperature




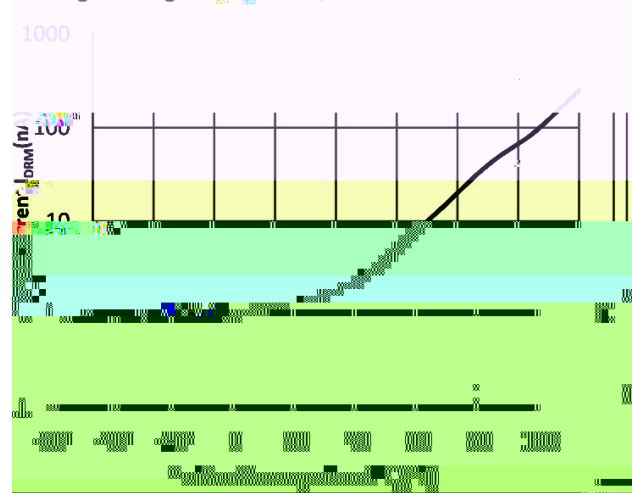

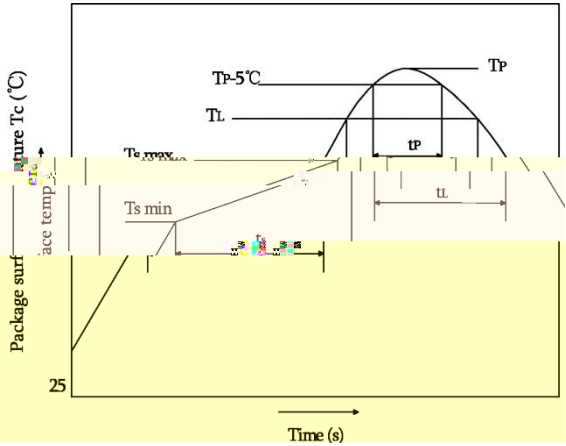

Preheat temperayure	Ts	150	200	
Preheat time	ts	60	120	s
Ramp-up ratea(TL to TP)			3	/s
Liquidus temperature	TL	217		
Time above TL	tL	60	150	s
Peak temperature	TP		260	
Time during which Tc is between (TP-5) and TP	tp		30	s
Ramp-down rate(TP to TL)			6	/s

Note:

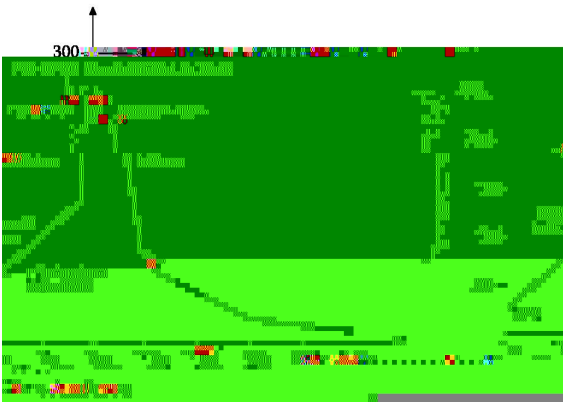

Average ramp-up rate	200 /s
Heating rate during preheat	1 /s to 2 /s typical;4 /s maximum
Final preheat temperature Ts	130
Preheat time (25 to Ts)	60s
Peak temperature Tp	260
Time within peak temperature tp	10s
Ramp-down rate	5 /s maximum

