

技术数据表

2720 正白 0.5W 车用 贴片式发光二极管



特点 (C) :

L/W/H :2.8*2.1*0.6mm

Appearance dimension (L / w / h): 2.8*2.1*0.6mm

: /

Luminous color and colloid: Wh

应用领域 (P










典型特性曲线

Typical Characteristics Curve

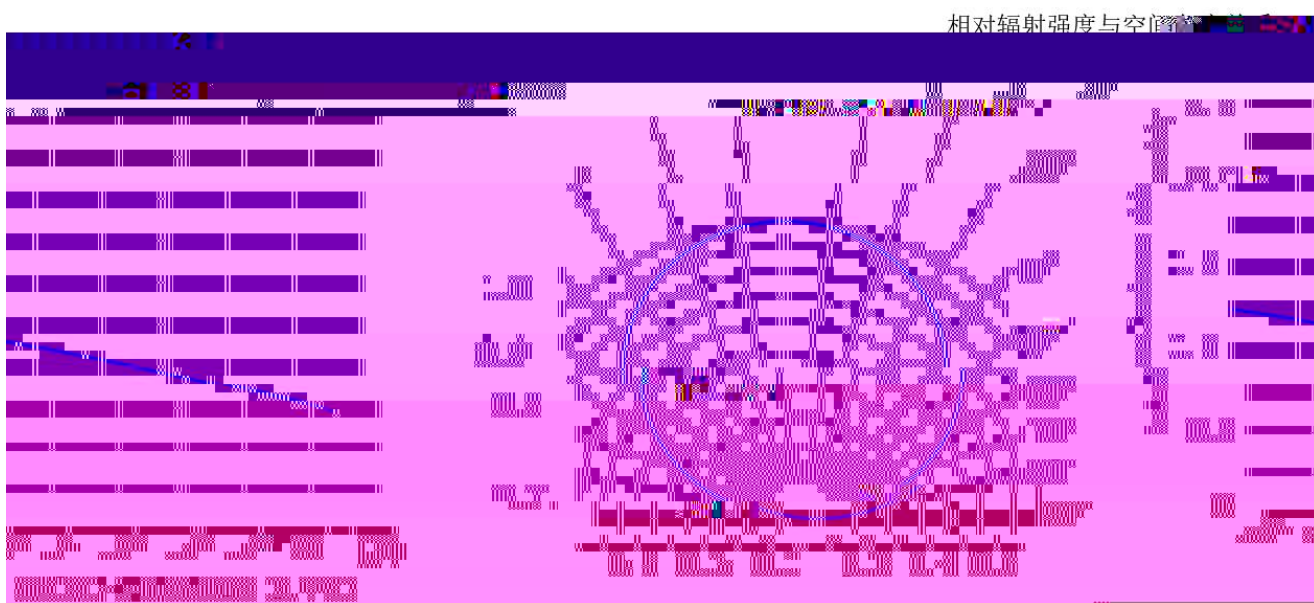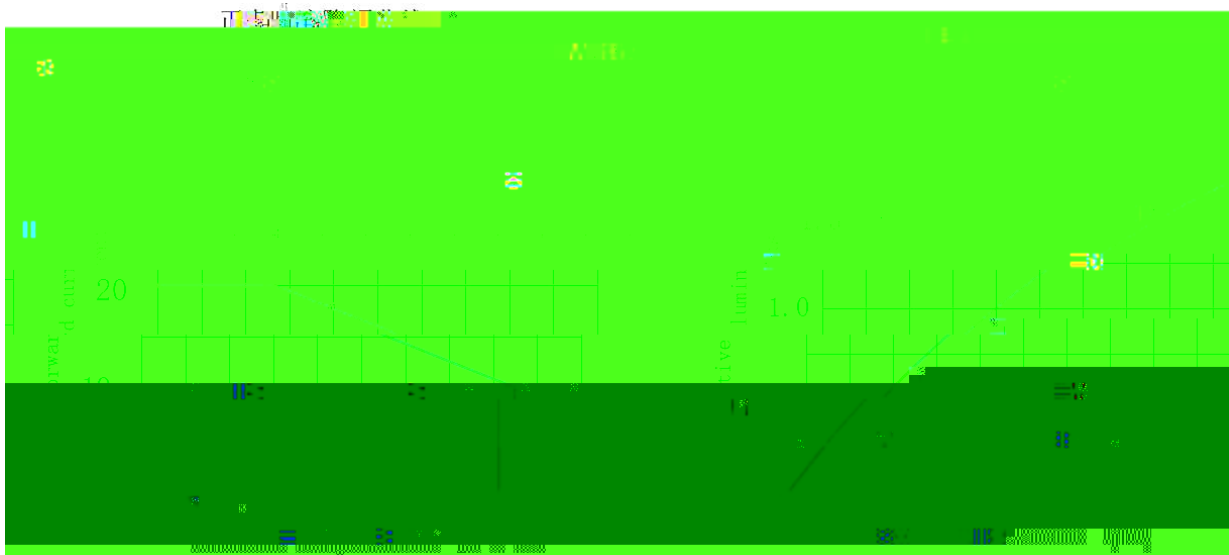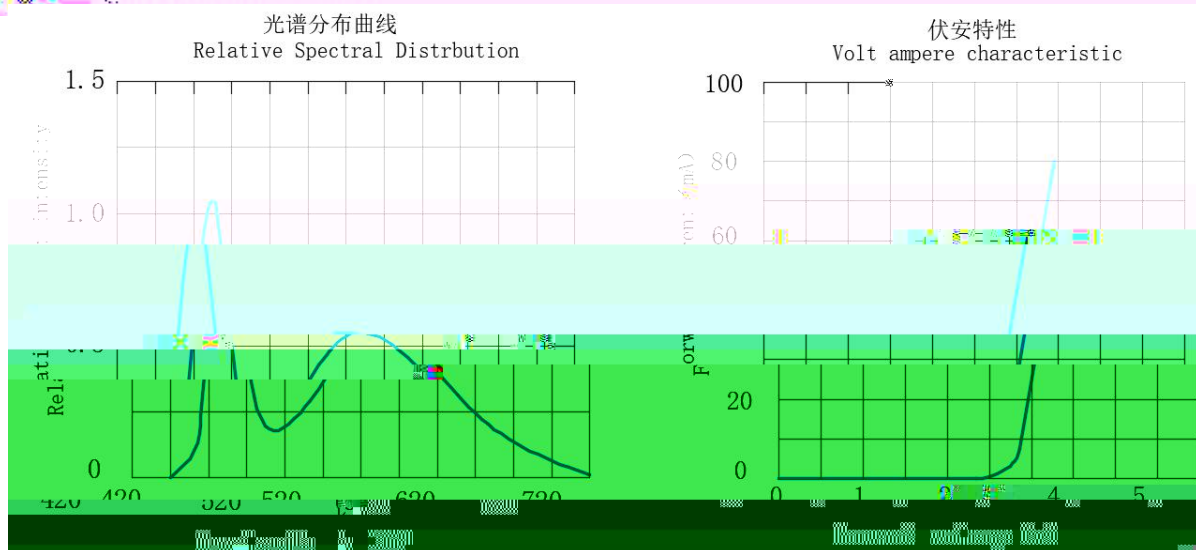











焊接指导（2）

Guideline for Soldering (2)



30

30

3

50

LED

300W

LED

LED

It is recommended that alcohol be used as a solvent for cleaning after soldering. Cleaning is to go under 30 for 3 minutes or 50 for 30 seconds. When using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not.

Ultrasonic cleaning is also an effective way for cleaning. But the influence of Ultrasonic cleaning on LED depends on factors such as ultrasonic power. Generally, the ultrasonic power should not be greater than 300W. Before cleaning, a pre-test should be conducted.



