


SSL150-NO88-Y






电性参数

Max Continuous Forward Current			

Forward Voltage	VF	1.8	/	2.4	V	IF=150mA
Luminous Intensity	IV	5000	/	8000	mcd	IF=150mA
Dominant Wave Length	λ d	585	/	595	nm	IF=150mA
Peak Wave Length	λ p	/	588	/	nm	IF=150mA
Viewing Angle	2 θ 1/2	/	90	/	deg	IF=150mA
Spectral Width at half height	λ	/	20	/	nm	IF=150mA
Reverse Current	IR	/	/	≤ 10	μ A	VR=5V

± 10%± 0.1V (X,Y)± 0.01± 1nm

Note: the light intensity error is 10%; The pressure drop error is ±0.1V ; (X,Y) coordinate deviation ±0.01 wavelength error ±1 nm.



高度分档

:

代码	最小值	最大值	单位	测试条件
				IF=150mA


电压分档

:

代码	最小值	最大值	单位	测试条件
				IF=150mA

波长分档

代码	最小值	最大值	单位	测试条件




可靠性试验

Reliability Test Items And Conditions

--	--




外形尺寸

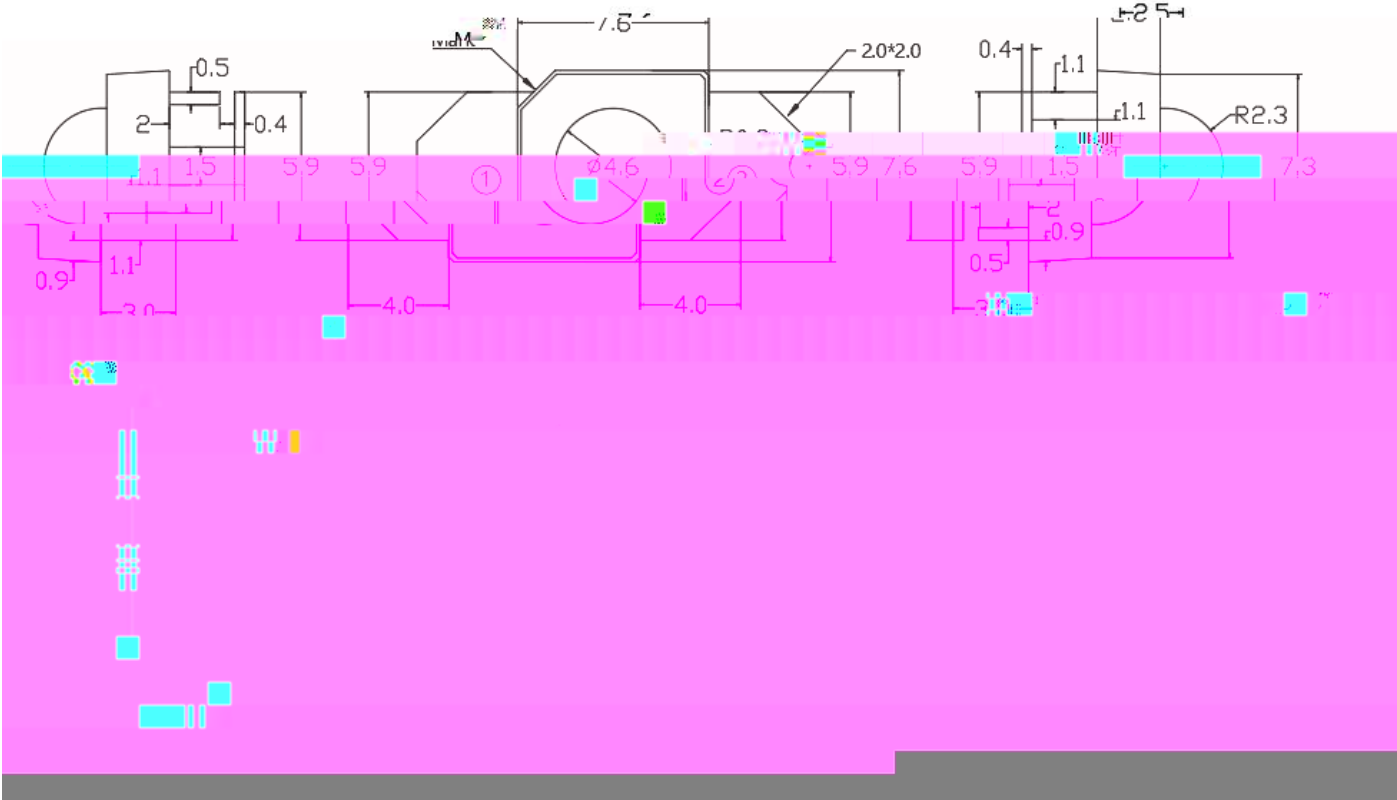


1.




2. mm .



包装

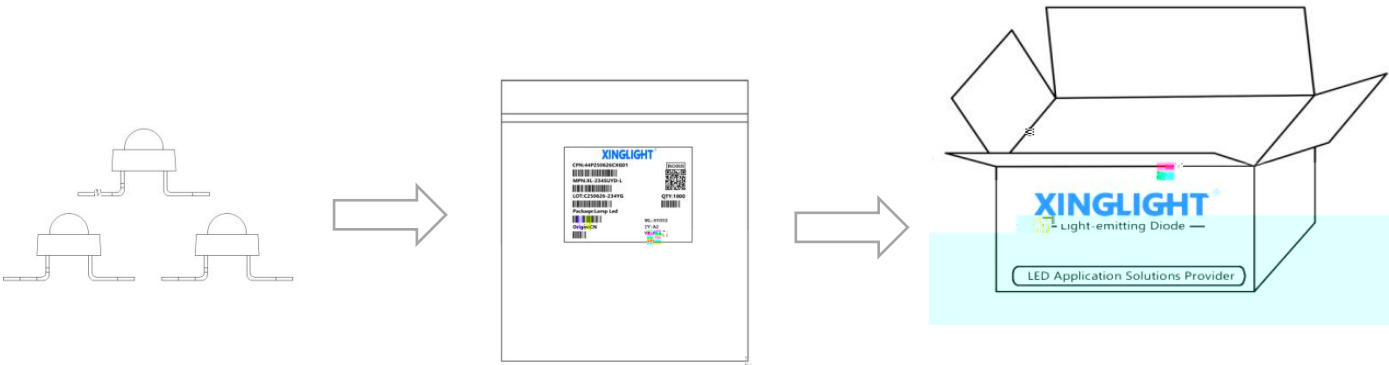


标签说明 Label Expansion

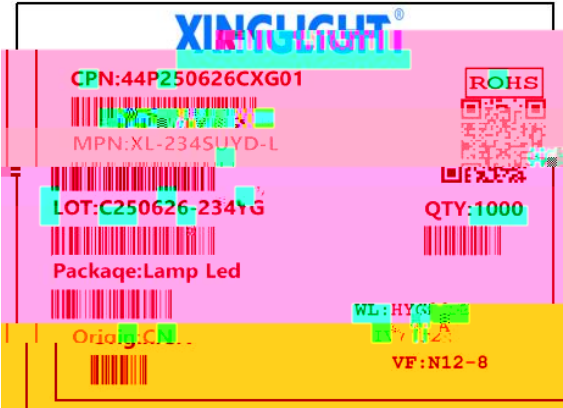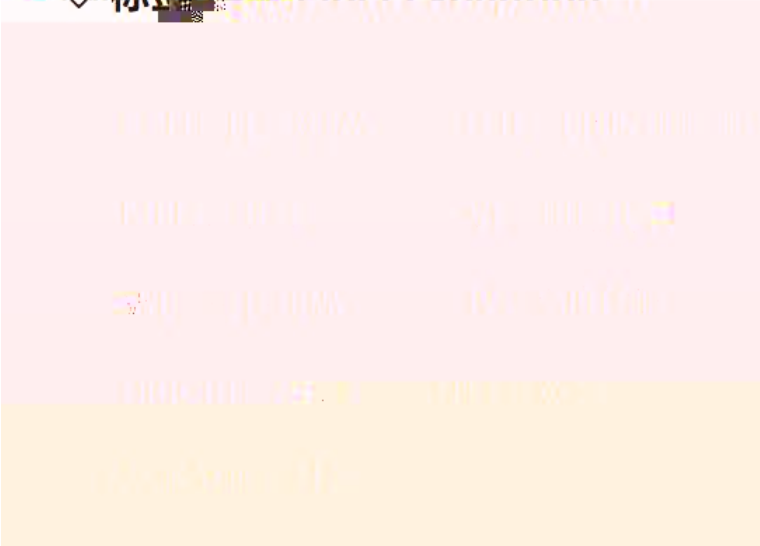

使用注意事項)

LED


LED 30 70% LED h



使用注意事项 ()

LED

LED





使用注意事項

