- ж ڑ ı ' ε ف ⅄ ∟ζ χ ;43p Z εWF @ 58¯F ζ

RswIfdo rxwsxw sr zhu +frqwlqxrxv zdyh,= ;43p Z +WF @ 58¯F,

- Ε ʒ ʌ ṃ ∟ ڈ χ 853q p

W|slfdo hplvvlrq zdyhohqjwk= 853q p

- گ ⅄ ف ∟ ⊃ ǐ ˙ ₩Ã ⓞ ح ϖ̃ ڈ ṃ ◊

H flhqw udgldwlrq vrxufh iru fz dqg sxovhg rshudwlrq

- D ₩ Æ Ṁ ч ☼ ж ʜ

Vlqjoh prgh vhplfrqgxfwruodvhu

- ح ذ ˙ Ṿ Ḳ

Kljk prgxodwlrq edqgzlgwk

- Ṿ ж ɔ ⁀ ll ⅄ ⓞ WR89Ṃ Ḷ

WR89 sdfndjh zlwk skrwr glrgh

- ► ↔ ϖ̃ y ́ ч ⅄ ε PVO ζ =5 ⅄

Prlvwxuh vhqvlwlylw| ohyho ε PVO ζ = 5ohyhov

- ע ʒ ɟ ᵝ ı ч ᵀ URKV ⌊ ∂

Hqylurqphqwdo surwhfwlrq surgxfwv phhw URKV uhtxluhphqwv

- ☼ ж ⅈ ʒ ε OlGDU2Wri ζ ⅃ ⅃ '

Olgdu +OlGDU2Wri, dqg Udqjh Phdvxuhphqw

- Ṫ ў ₅ ⅃ ⅃ Ḡ ∿ e y

Lqgxvwuldo Ghwhfwlrq dqg Vdihw| Vhqvlqj

- ll ỉ ⅃ ⅃ ⊢ ж Ḍ ẹ

Phglfdo dqg Elrskrwrqlfv

- ˢ ' ⅃ ƒ گ

Plolwdu| dqg Qdwlrqdo Ghihqvh

- ⅄ ⅃ ⅈ Ḍ ʼH

Uhvhdufk dqg Txdqwxp Whfkqrorj|

- ⊤ ¯ ɔ Ḍ ⅃ Ḡ گ

Frqvxphu Hohfwurqlfv dqg Vhfxulw| V|vwhpv

目录



[redacted] m [redacted] ngs [redacted]

p [redacted] er	symbol		[redacted] nit
Ṫ Ă ɔ ╙			
r ᵇ Ɔ я			
Ṫ Ă □ ẙ			

典型特性曲线

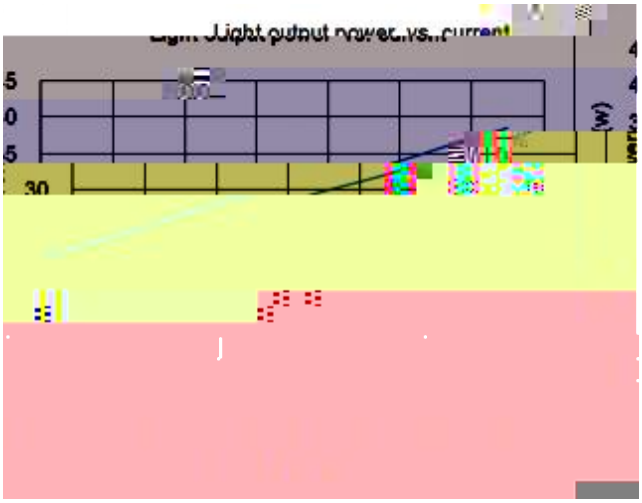
Light output power vs. current
(W)

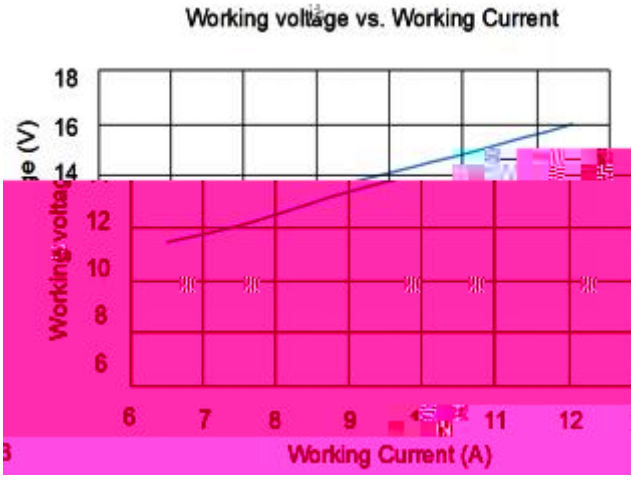
Working voltage vs. Working Current
Working voltage (V)
18
16
14
12
10
8
6
6
7
8
9
11
12
Working Current (A)

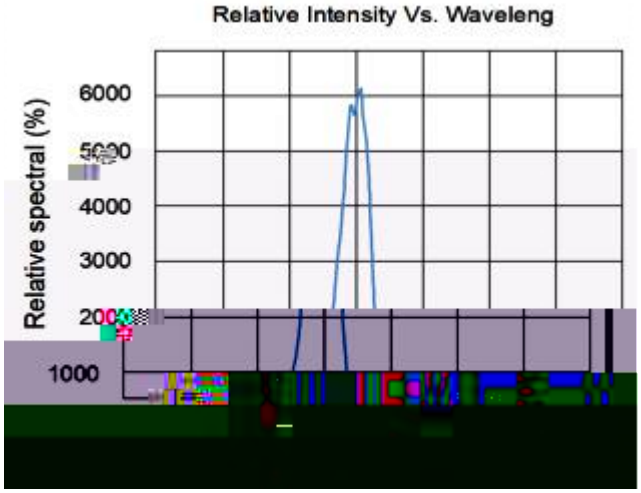
Relative Intensity Vs. Waveleng
Relative spectral (%)
6000
4000
3000
1000

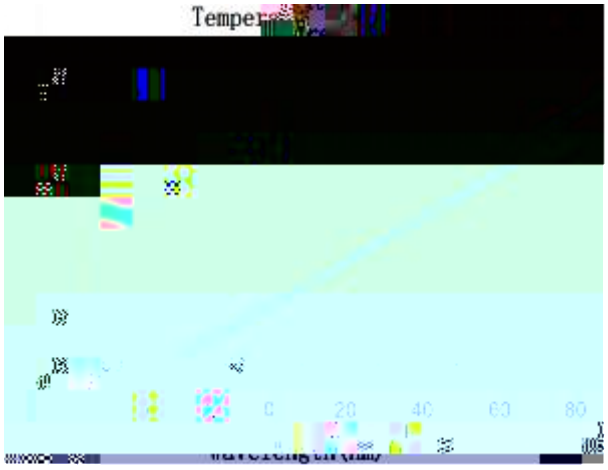
Temper

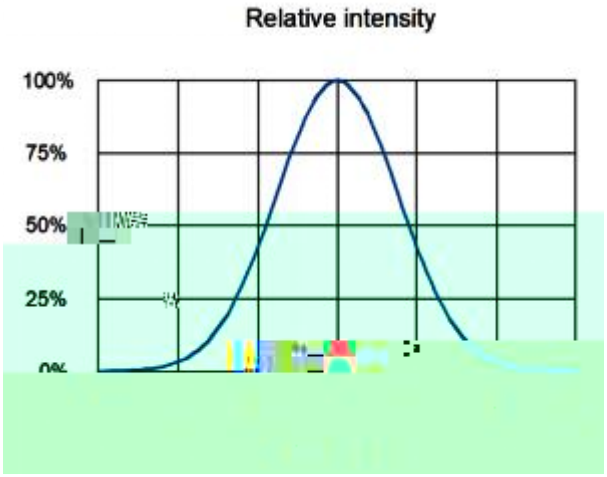
Relative intensity
100%
75%
50%
25%

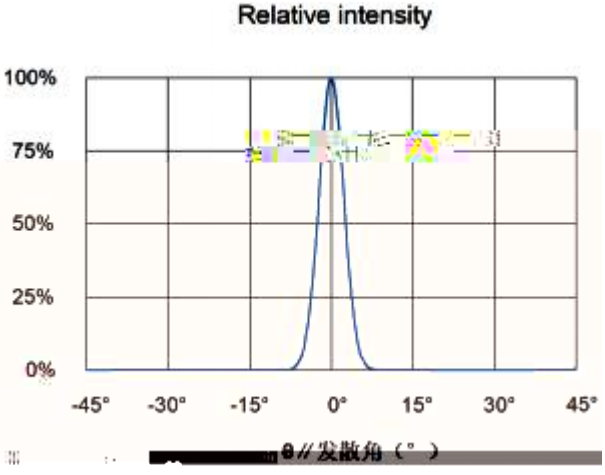
Relative intensity
100%
75%
50%
25%
0%
-45°
-30°
-15°
0°
15°
30°
45°
θ// 发散角（°）

外形尺寸

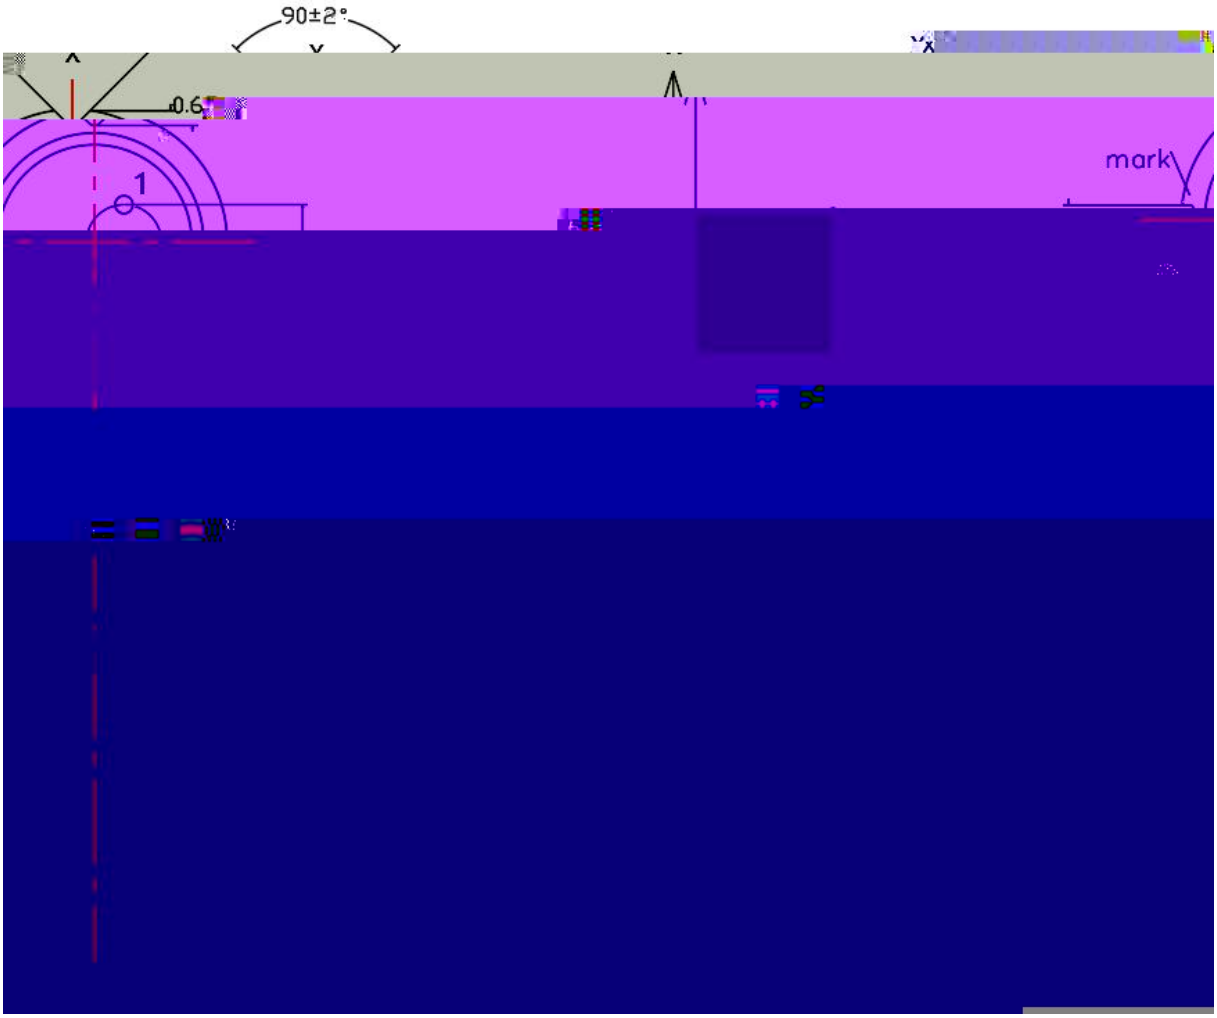



ε 4 ζ ọ ɹ ̃ ̀ ỉ ɥ 5 ← ɴ ɛ ́ ́ ỉ ỉ å ̃ Ḥ "
Lw p xvw eh 5 p p iur p wkh froorlg wr ehqg wkh eud;