


- ;43 p Z WF @ 58±F
Rswlfd0 rxwsxw sr zhu +frqwlqxr xv zdyh,- ;43 p Z +WF @ 58±F,
- 853qp
W|slfd0 h p lwlrq zdyh0hqj wk= 853qp
- H flhqw udgldwlrq vrxufh iru fz dqg sxovhg rshudwlrq
- Vlqj0h p rgh vhlfrqgxfwru odvhu
- Kljk prgx0dwlrq edqgzlgwk
- WR89
WR89 sdfndjh zlwk skrwr glrgh
- PV0 =5
Prlwxuh vhlqvlwlylw| 0hyh0 PV0 = 50hyhov
- URKV
Hqylurq phqwd0 surwhfwlrq surgxfwv phhw URKV uhtxluh phqvw



- OIGDU2Wri
Olqdu +OIGDU2Wri, dqg Udqj h Phdvxuh phqw
- Lqgxvwuldo Ghwhfwlrq dqg Vdihw| Vhqvlqj
- Phglfd0 dqg Elrskrwrqlfv
- Plolwdu| dqg Qdwlrqdo Ghiahqv
- Uvhdufk dqg Txdqwx p Whfkqr0rj|
- Frqvxphu Hohfwurqlfv dqg Vhfzulw| V|vhw p v



目录




OPTIMU

Absolute Maximum Ratings Ta=25







parameter

Symbol


unit




电致发光性能

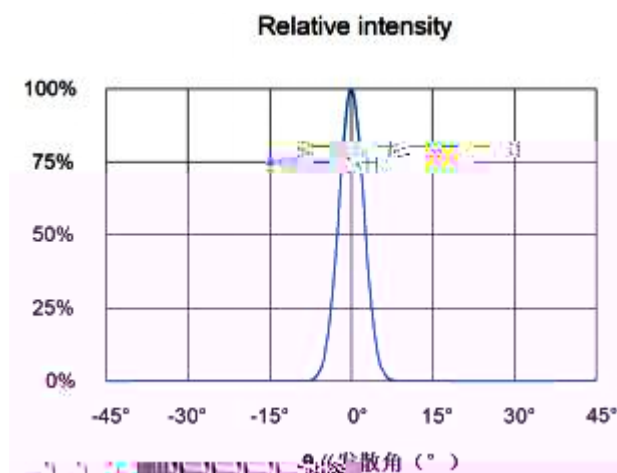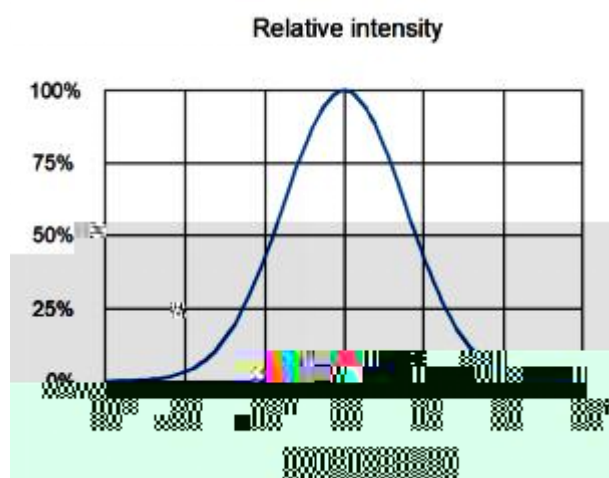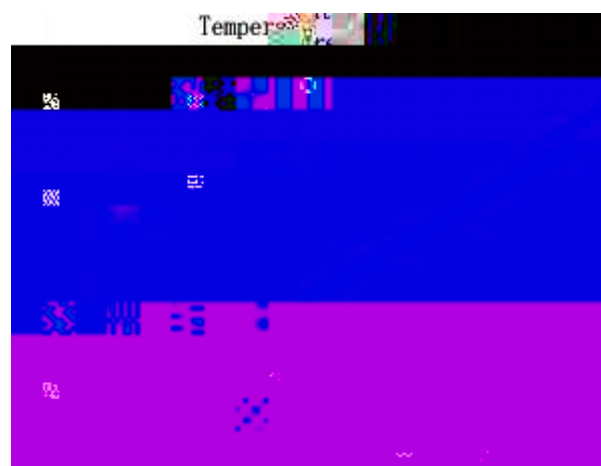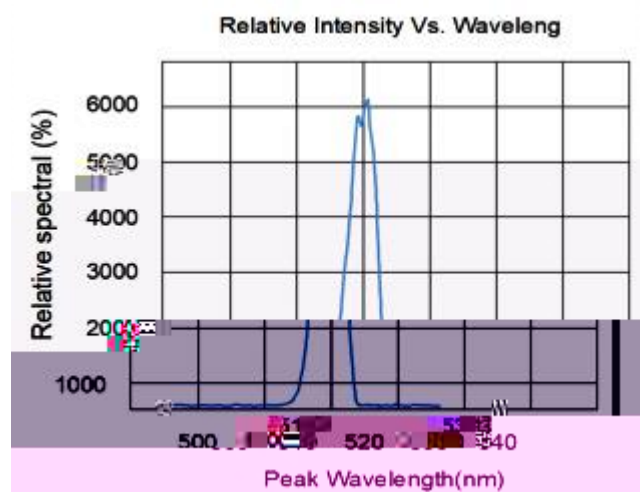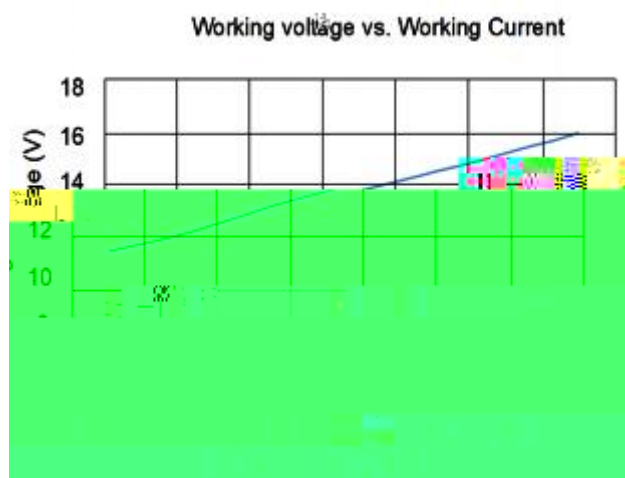

外形尺寸

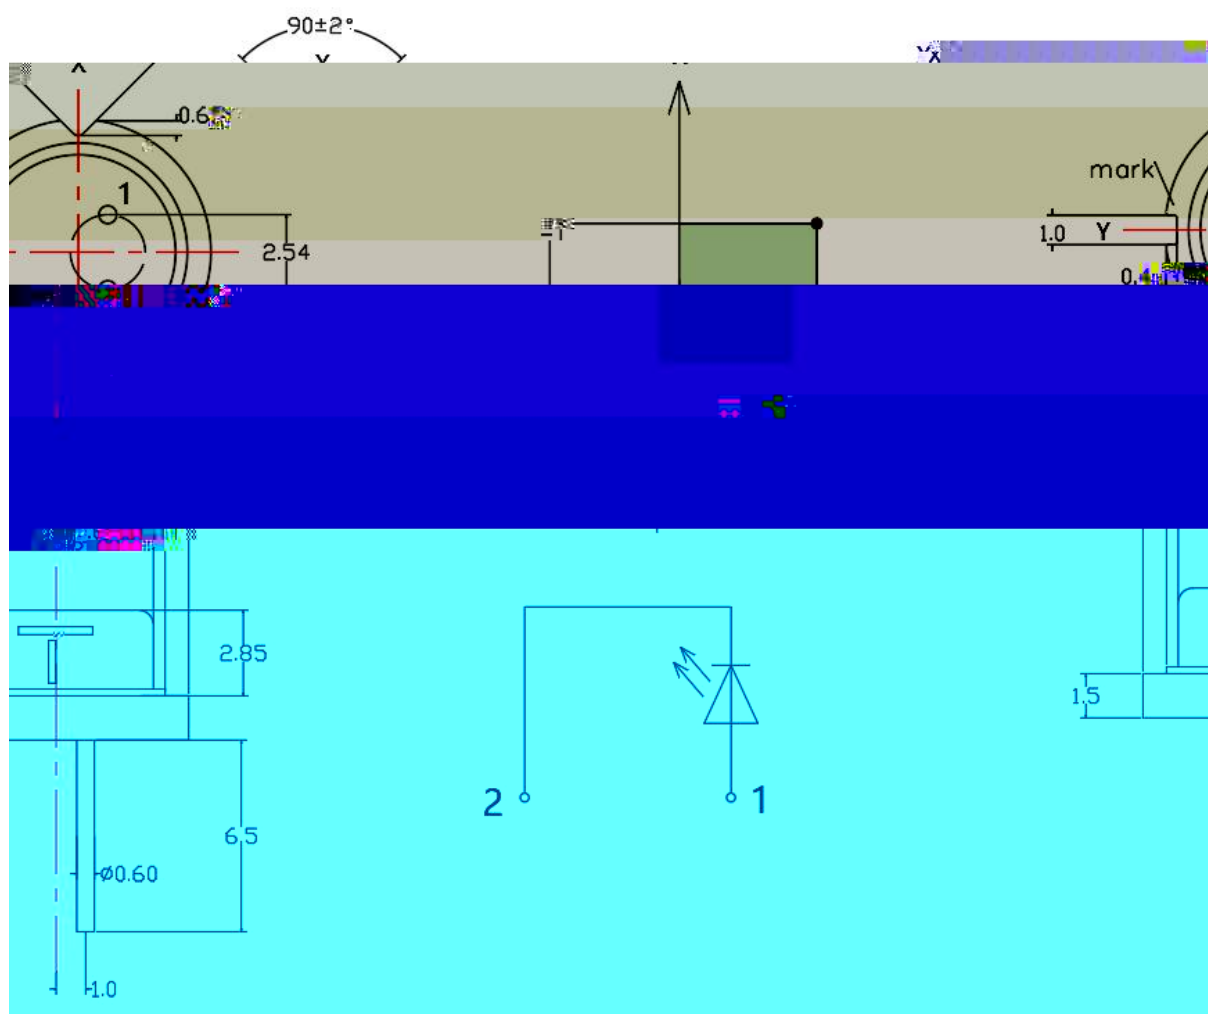



5

Lw p xvw eh 5 p p iur p wkh fr00rlg wr ehqg wkh eud;

