Product features

目录

Catalogue

natural parameter 3

Typical Characteristic Curves 5

Outline Dimensions 6

Packaging.....7

Precautions.....8

特性参数

Absolute Maximum Ratings Ta=25

parameter	symbol	Value	unit
power	Po	30	mW
backward voltage	VR	2	V
working temperature	TOP	-20 60	
Storage Temperature	Tstg	-40 85	
Welding conditions	Tsol	reflow soldering 240°C 6s manual welding 300°C 3s	

Recommended Operating Conditions

parameter	symbol	Value	unit
Threshold Current	Ith	23	
Working Current	Iop	90	
working voltage	Vop	6.0	

Optoelectronic Parameters

parameter	symbol	Test conditions	min	typ	max	unit
Thr						

典型特性曲线

Typical Characteristics Curves

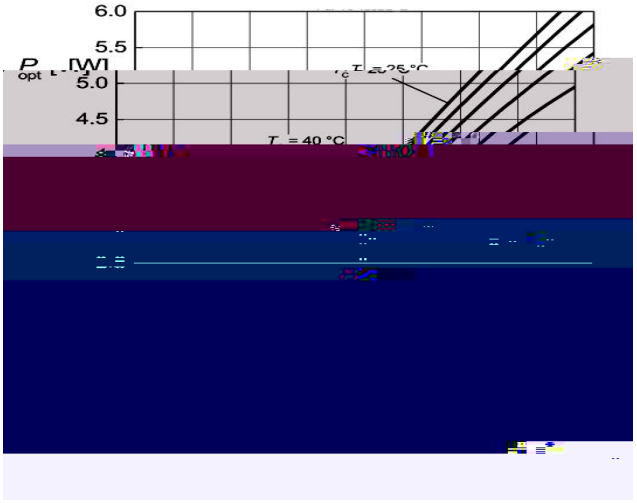

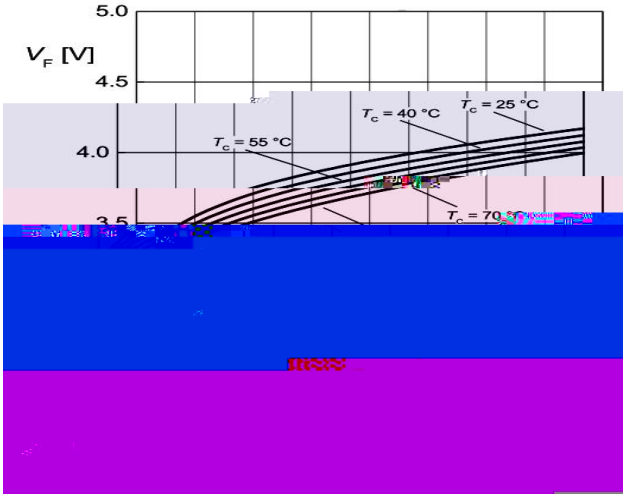

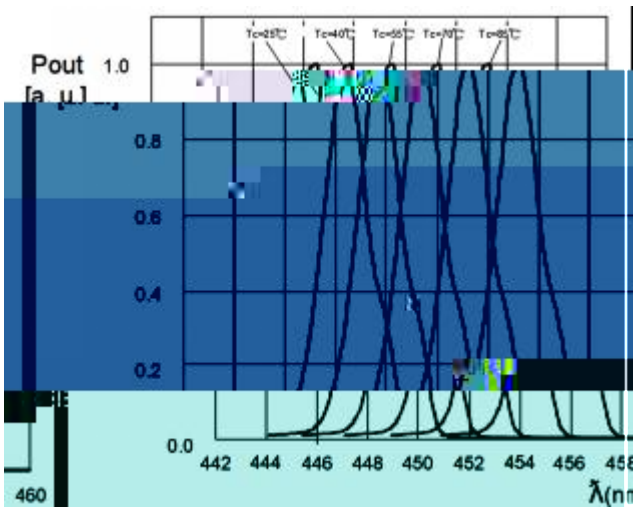

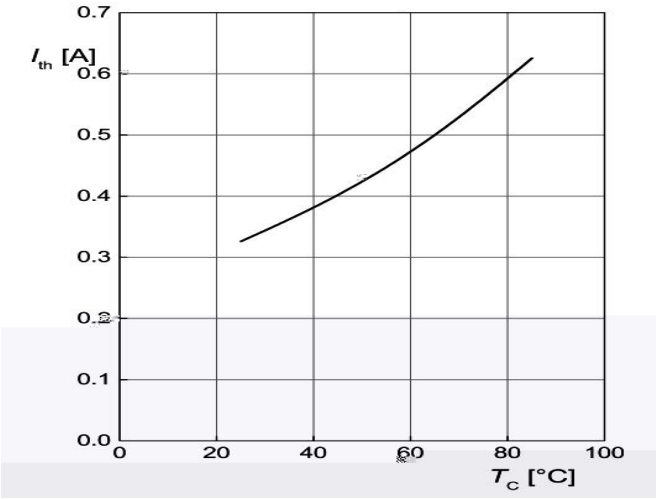

外形尺寸

Outline Dimension

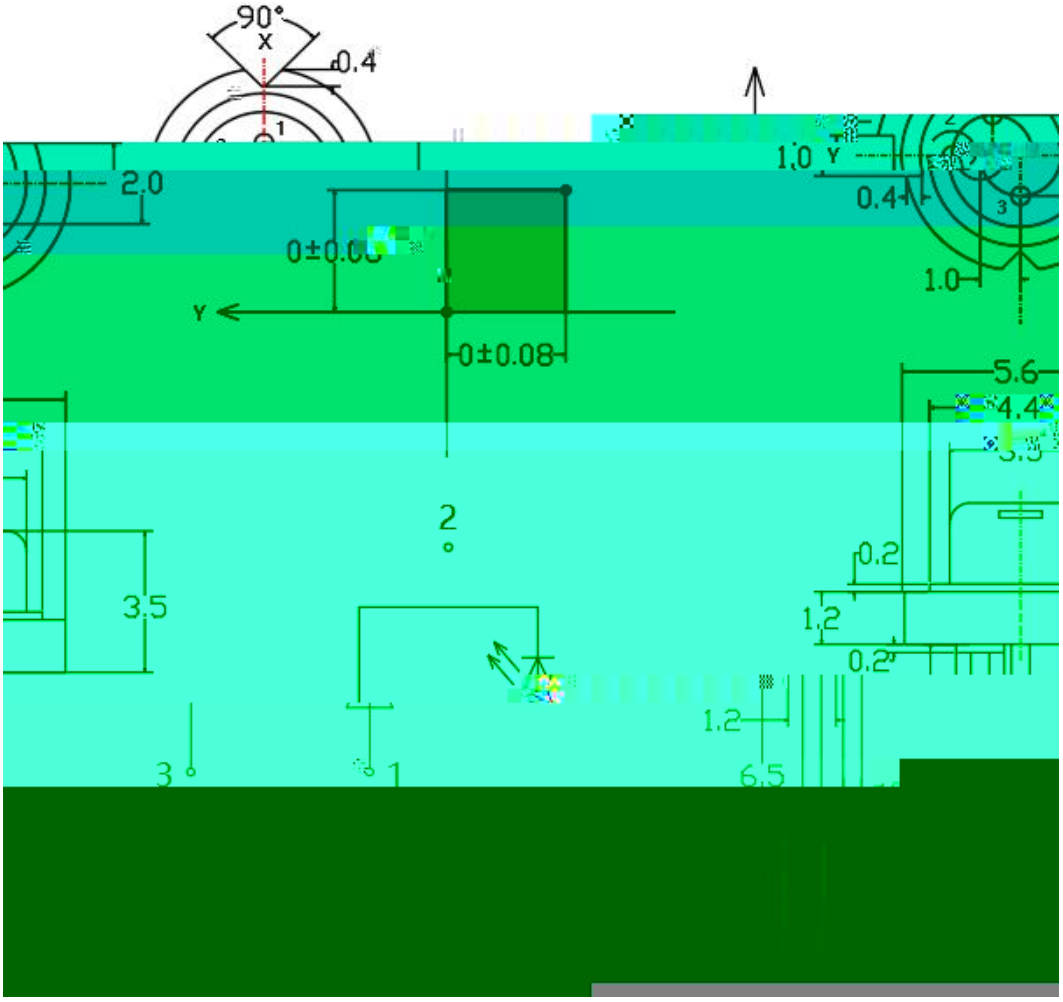

1.

2. mm .

使用注意事项

Precautions

1. Feet assembly

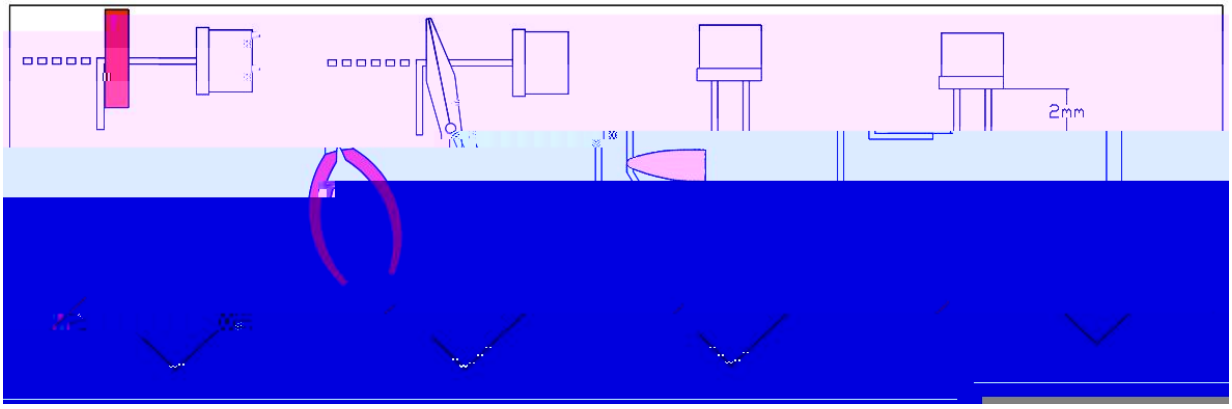

2. Electrostatic protection

3.