


- 68p Z WE @ 5 ±F
Rswlfd0 rxwsxw srzhu+frqwlq> xv zdy,-68p Z
- 84;q p
- W|slfd0 kplwlrq zdyhohqjwk= 84;q p
-
H flhqw udgldwlrq vrxfh iru fz dqg swwhg rshudwlrq zu
-
Vlqjoh prgh vhp lfrqgxfruo dvhu
-
Kljk prgxodwlrq edqgzlgwk
- WR89
WR89 sdfndjh zlwk skrwr glrgh
- I



目录



Absolute Maximum Ratings Ta=25

parameter	symbol		unit
			°C








Recommended Operating Conditions

parameter	symbol		unit
		0	pD
		0	pD
		0	Y






曲线特性分析

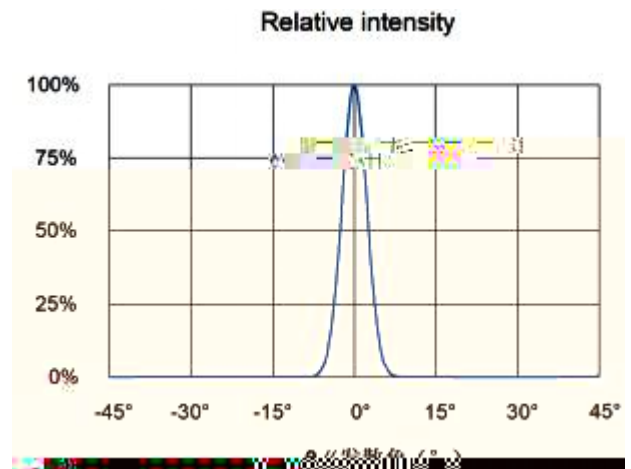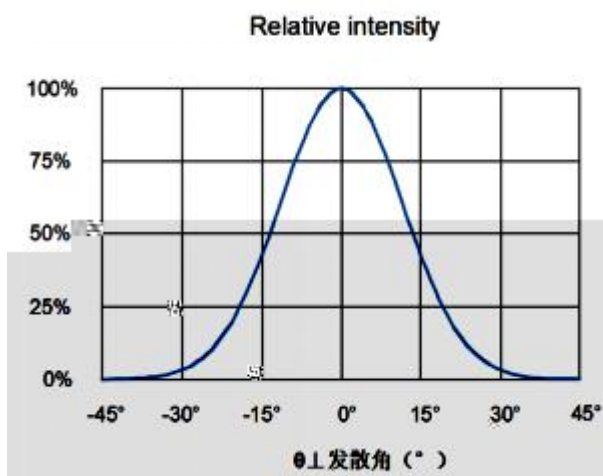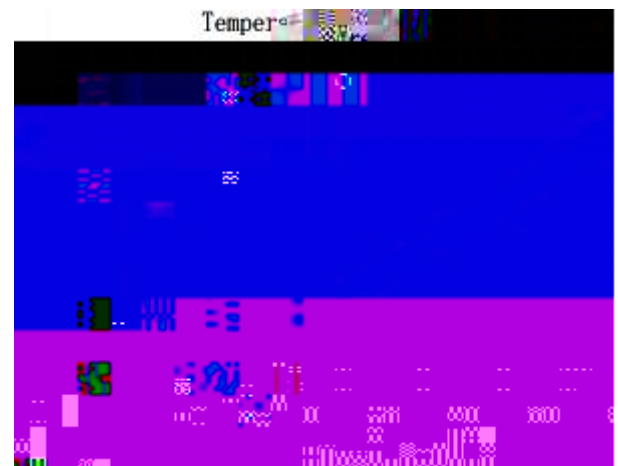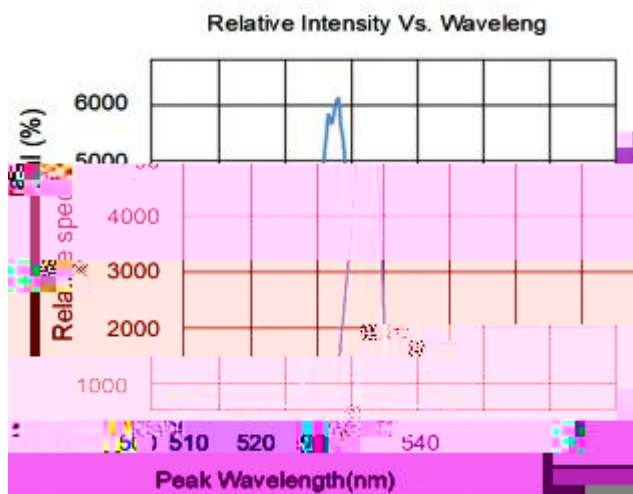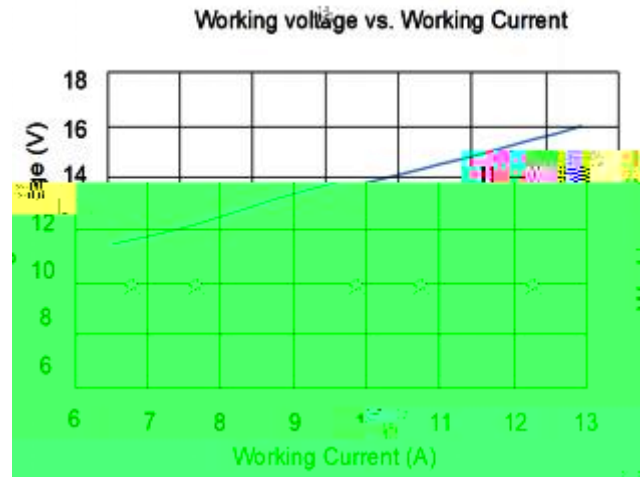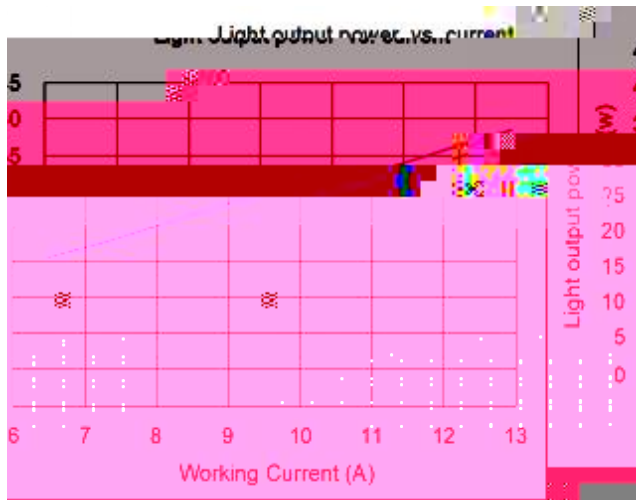



包装

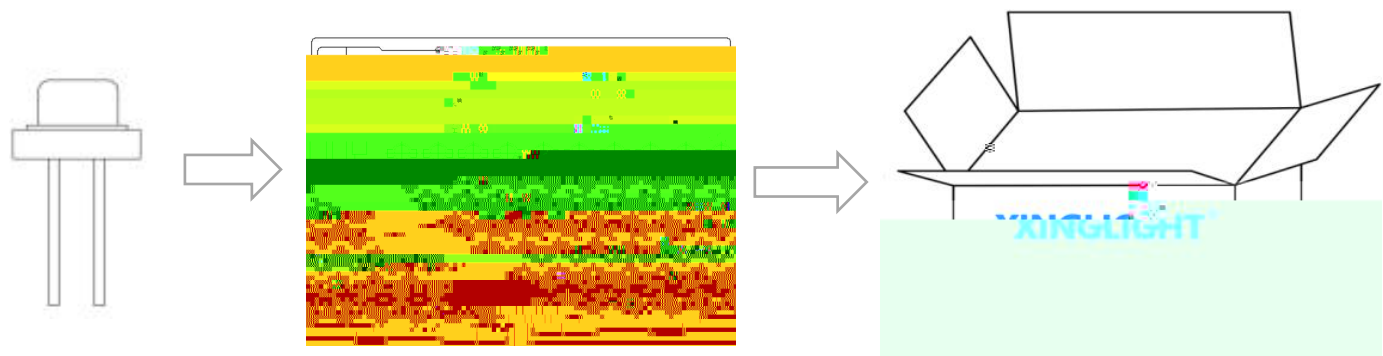

5

5

SFE

