

Part No.:






Absolute Maximum Ratings Ta=25

parameter	symbol	unit
power	Po	15 mW
backward voltage	LD	2 V
	PD	30 V
working temperature	TOP	-20 +60
Storage Temperature	Tstg	-40 +85
Welding conditions	Tsol	

Part No.

典型特性曲线

Typical Characteristics Curves

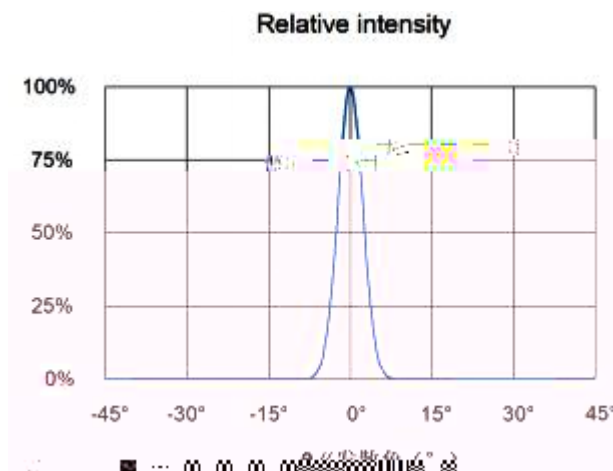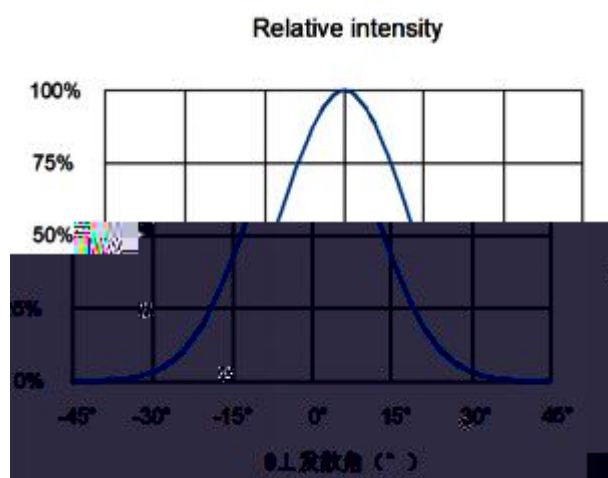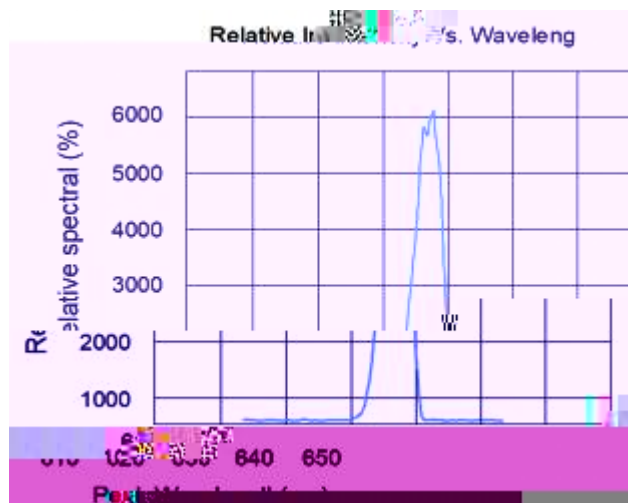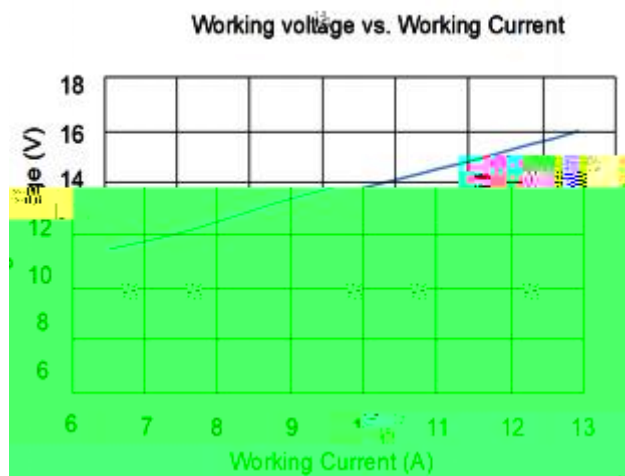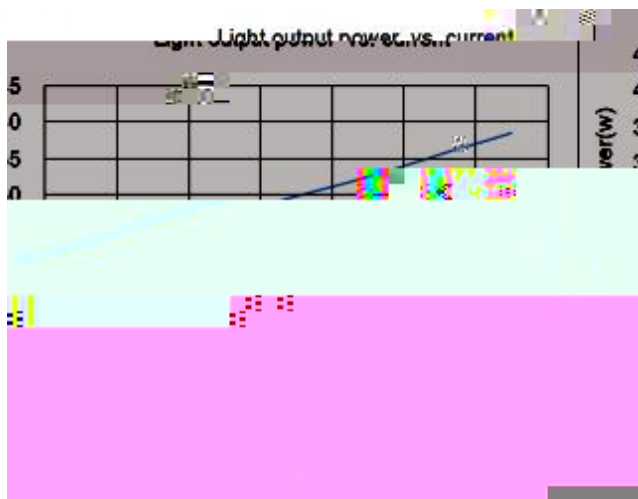






XINLIGHT®

Part No.: XL-PLPT5 635B-15mW



assembly

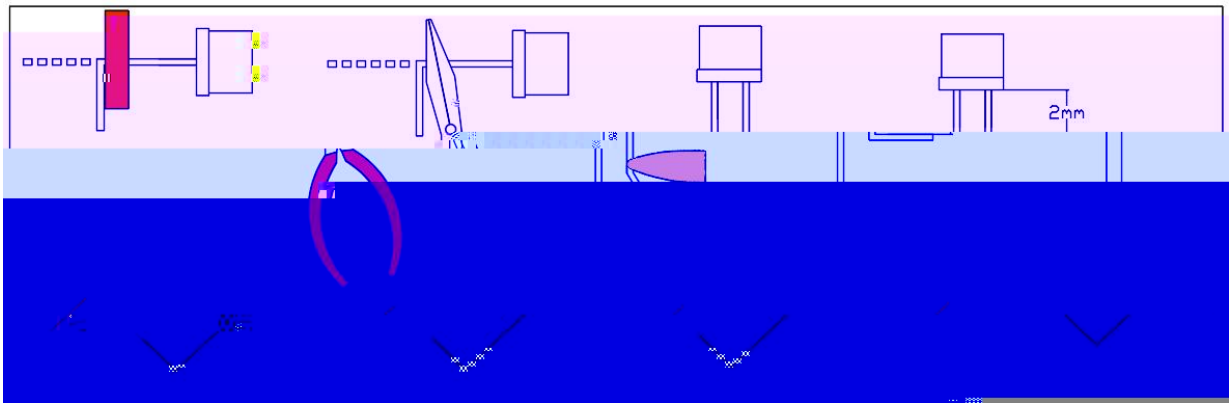

2. Electrostatic protection