

Product features

- 633 p Z WF @ 58±F
- Rswl



目录

Catalogue

natural parameter3

Typical Characteristic Curves5

Outline Dimensions6

Packaging.....7

Precautions.....8



特性参数

Absolute Maximum Ratings Ta=25

parameter	symbol		unit
			°C

Recommended Operating Conditions

parameter	symbol		unit
		0	pD
		0	pD
		0	Y










Optoelectronic Parameters

parameter	symbol	Test conditions	min	typ	max	unit
	H					
	$\Delta \clubsuit$					$\pm$
	$\Delta \blacksquare$					$\pm$
	$\Gamma \Delta \clubsuit$					$\pm$
	$\Gamma \Delta \blacksquare$					$\pm$
	Γg					




典型特性曲线

Typical Characteristics Curves

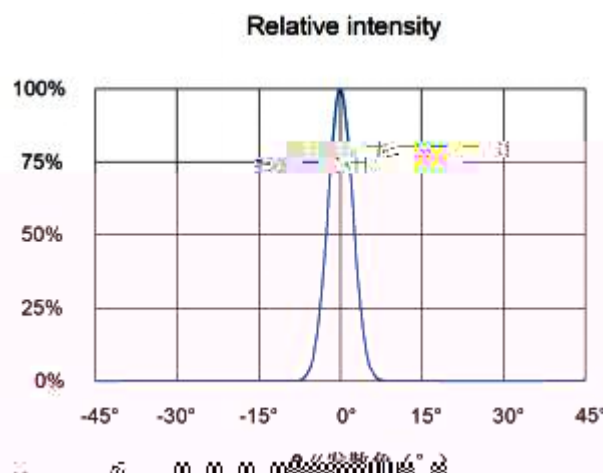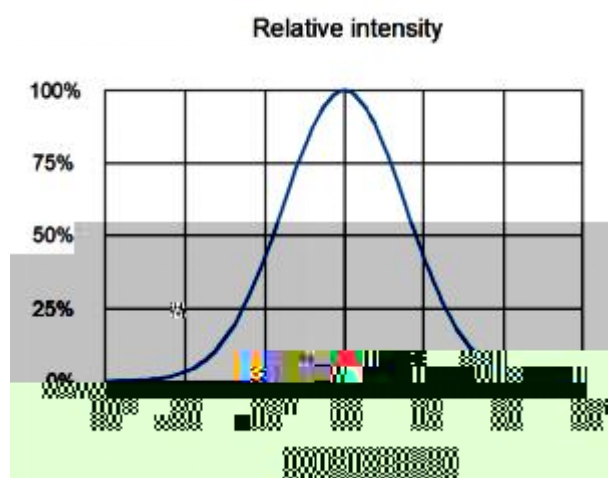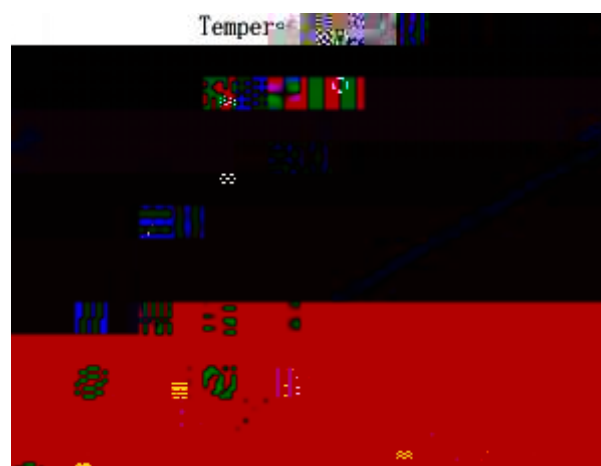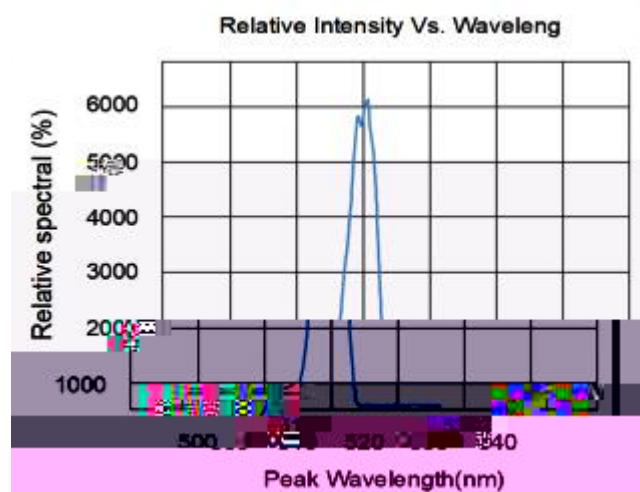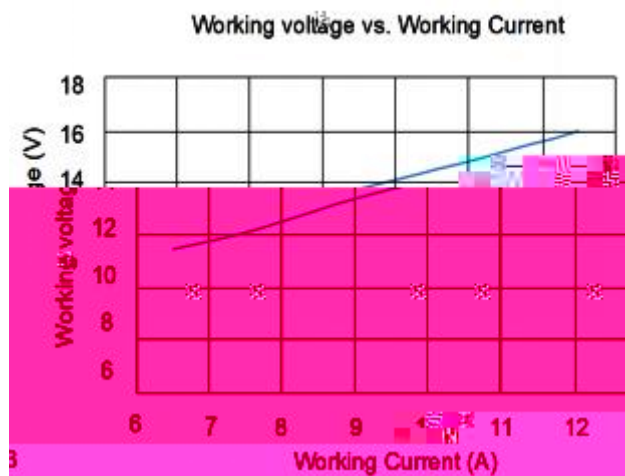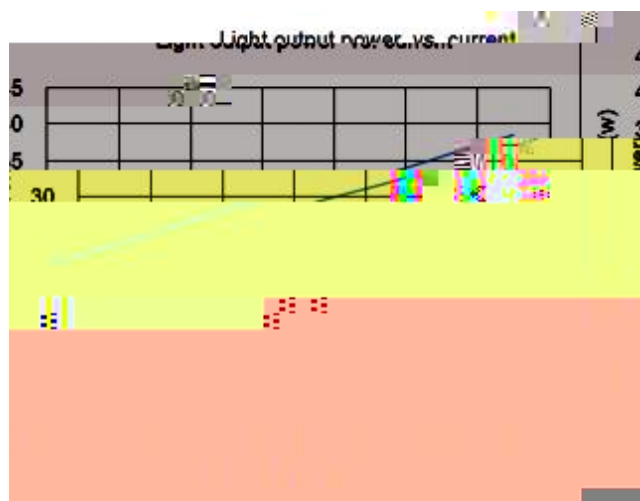


外形尺寸

Outline Dimension

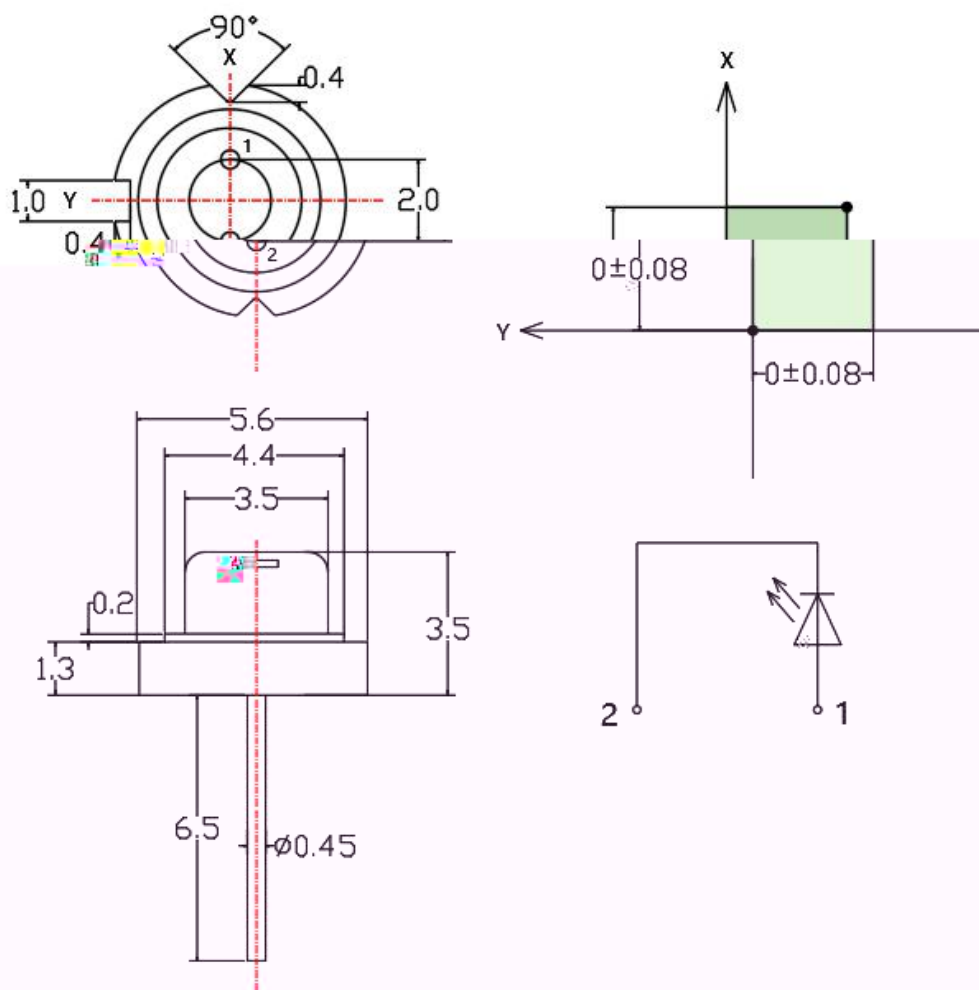

ing



使用注意事项

Precautions


1. Feet assembly

4 5

Lw p xvw eh 5 p p iur p wkh fr00rlg wr ehqg wkh eudfnhw1

5 SFE

Z h0glqj p xvw eh shuiruphg dw qrup d0 wh p shudwxuhv1 Rqfh wkh 0dvhu glrgh kdv ehqg surshu0| p rxqwhg rqr wkh SFE/ dyrlg dss0|lqj phfkdlfd0 suhvvxuh wr lww slqv z khqhyhu srrvleoh1

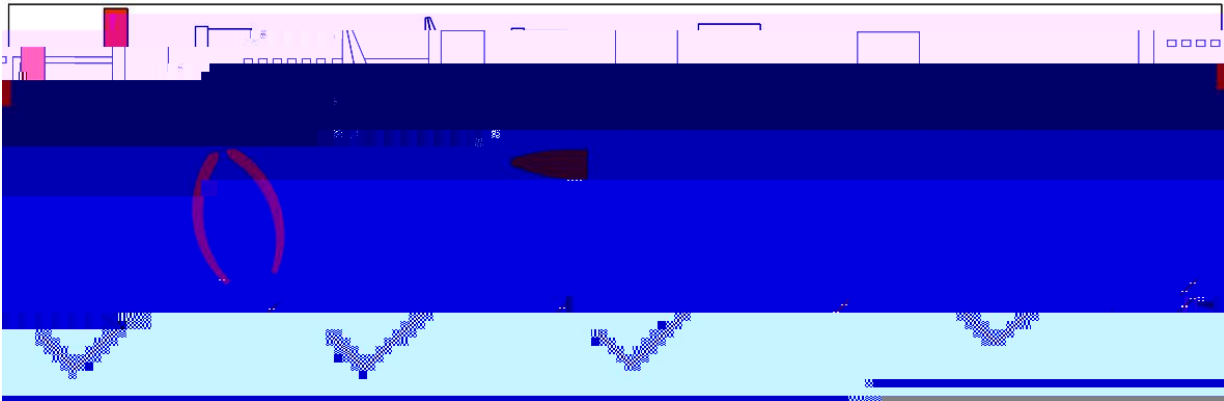

2. Electrostatic protection

” †

KEP

?;33Y 6

583Y0833Y ?433Y

S0dvwl0frdwhg 0dvhu glrghv gr qrw kdyh d il{hg %surwhfwlrq yrowdj h% yd0xh> wkhlu h0hfwu rvwdwlf v hqvlwlylw| w|slfd00| udqjhv iur p ?;33 Y rq wkh KEP kxp dq prgho +Judgh 6 v hqvlwlylw|,/ z lwk dfwx d0 wrohudqfh xvxd00| olplwhg wr 583–833 Y1 Surwhfwlrq phdvxuhv p xvw eh lp soh phqwhg dffruglqj wr wkh ?433 Y rshudwlqj vwdqgdug1

3.

Gxulqj 0dvhu rshudwlrq/ dyrlg h{srvxuh ri wkh h|hv dqg vnlq wr 0dvhu udgldwlrq1

Li wkhuh duh dq| p rglilfdwlrqv wr wkh vshflilfdwlrq vkhhw/ qr ixuwkhu qrwlfh z l00 eh jlyhq1

