


- 416 Z WF @ 58±F
Rswlfd0 rxwsxw sr zhu +frqwlqxr xv zdyh,- 416 Z +WF @ 58±F,
- 858q p
W|slfd0 h p lwlrq zdyh0hq j wk- 858q p
- H flhqw udgldwlrq vrxufh iru fz dqg sxovhg rshudwlrq
- Vlqj0h p rgh vhlfrqgxfr u odvhu
- Kljk p rgx0dwlrq edqgzlgwk
-


目录

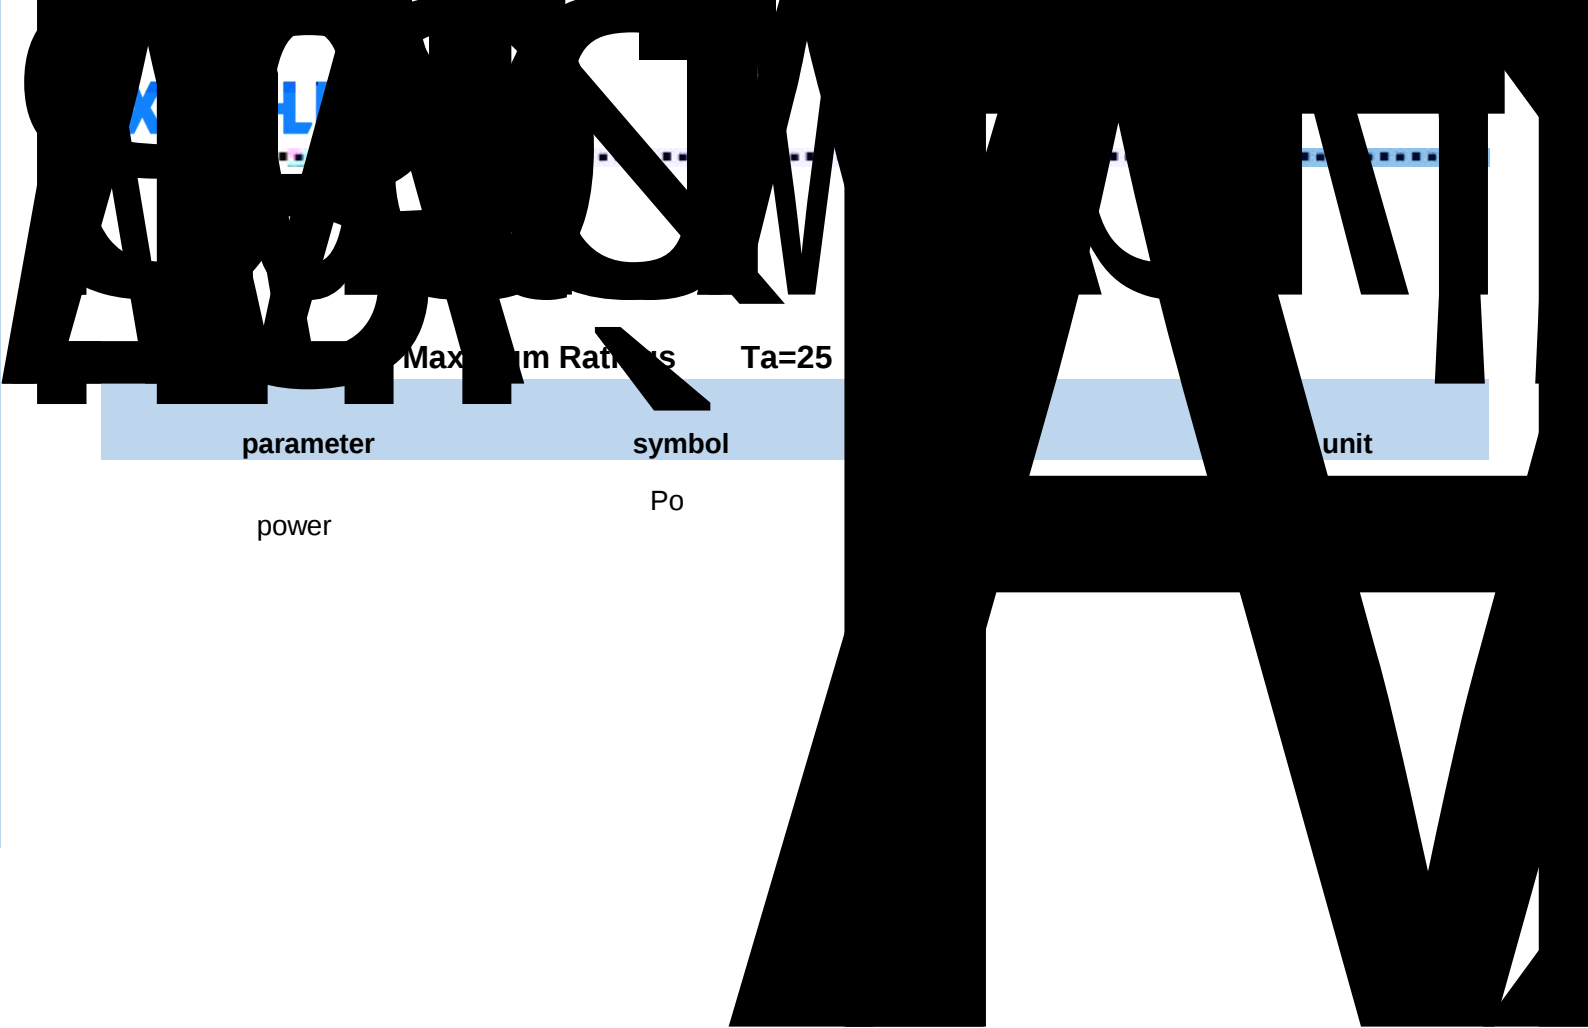


Maximum Ratings			Ta=25
parameter	symbol		unit
power	Po		

曲线特性分析


Output power vs Current

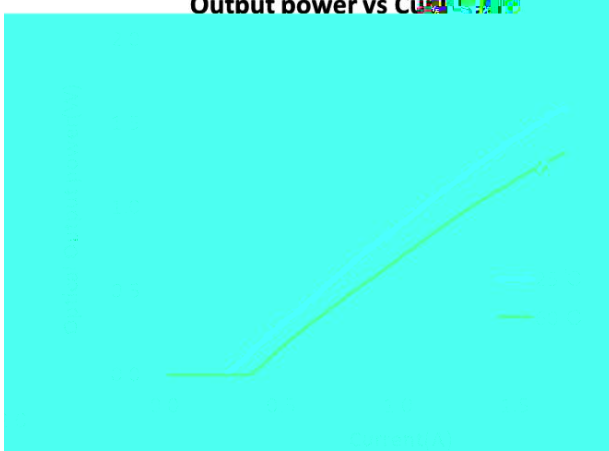


Voltage vs Current

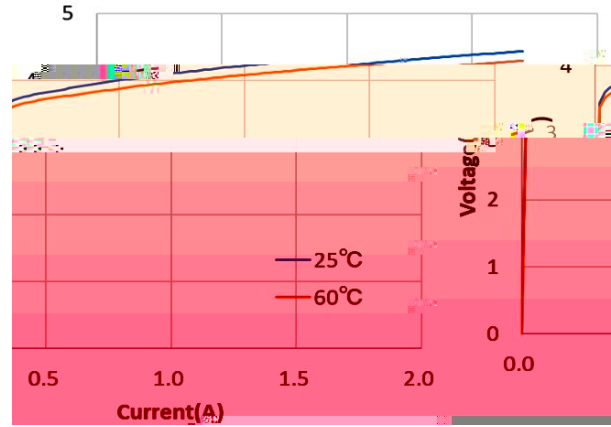


Relative Intensity Vs. Wavelength

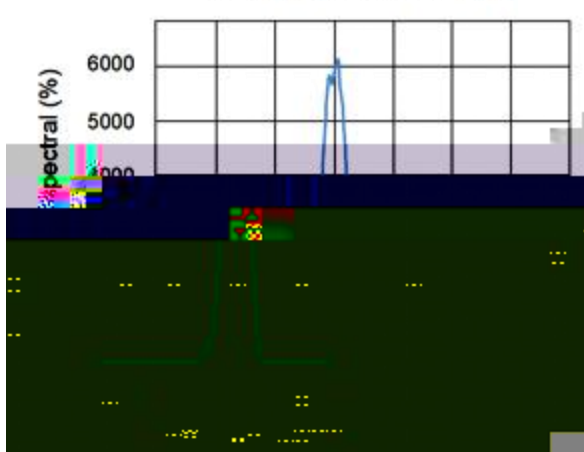


Temperature

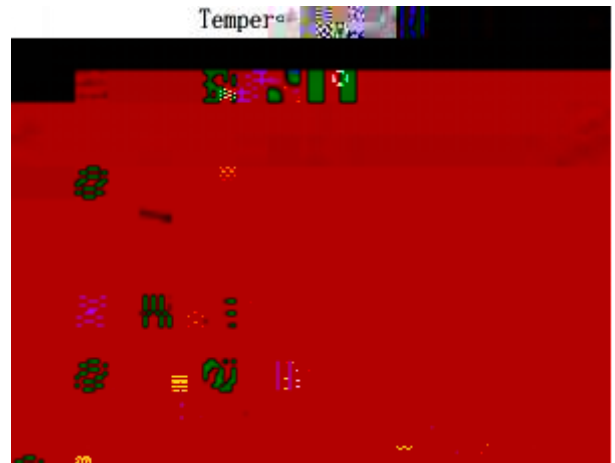

Relative intensity

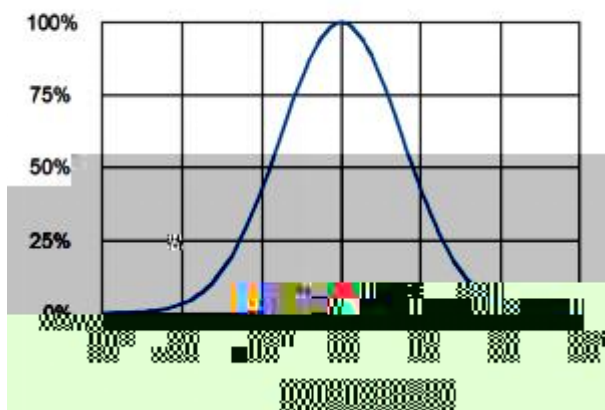


Relative intensity

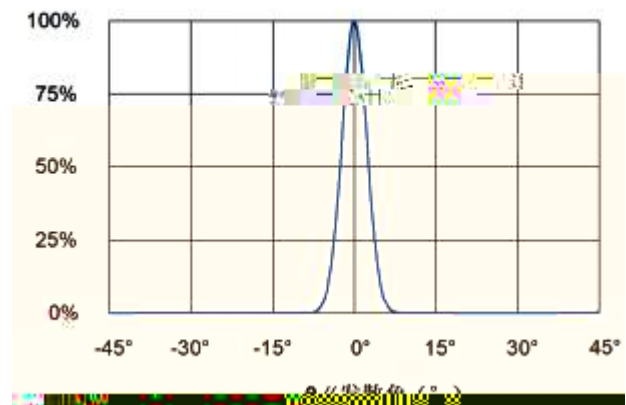

外形尺寸

包装

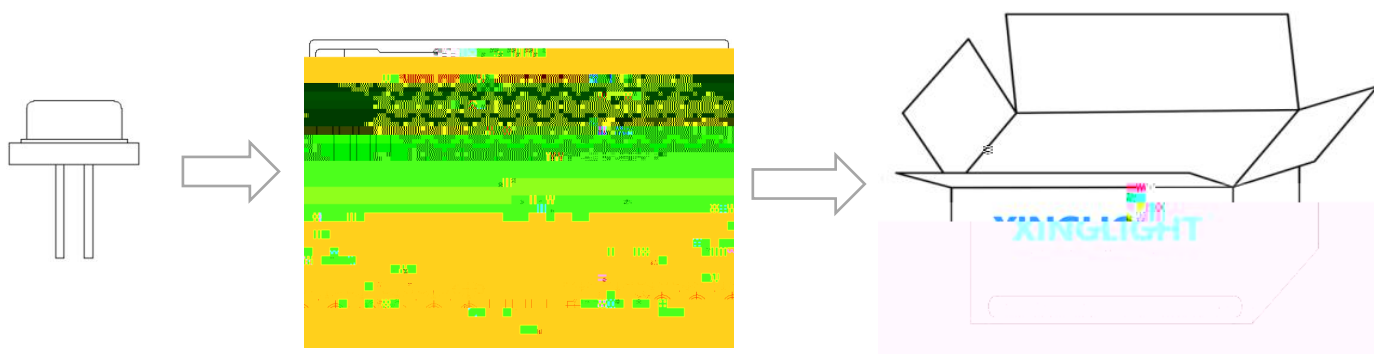



4

5

