Part No.:

Absolute Maximum Ratings Ta=25

parameter	symbol			unit
power	Po		15	mW
backward voltage	VR	LD	2	V
		PD	30	
working temperature	TOP		-20 +60	
Storage Temperature	Tstg		-40 +85	
Welding conditions	Tsol			

典型特性曲线

Typical Characteristics Curves

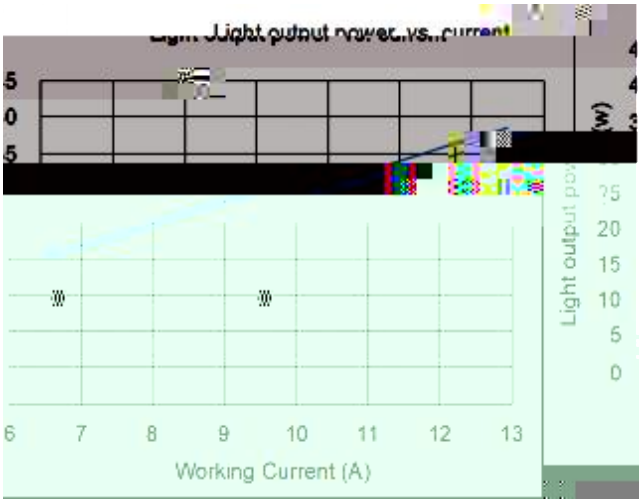

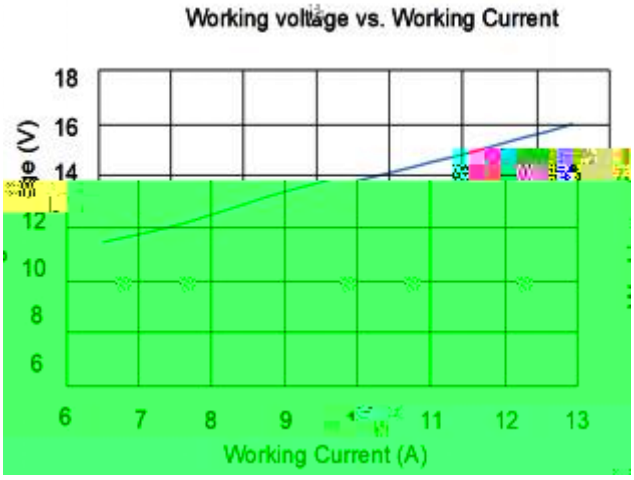

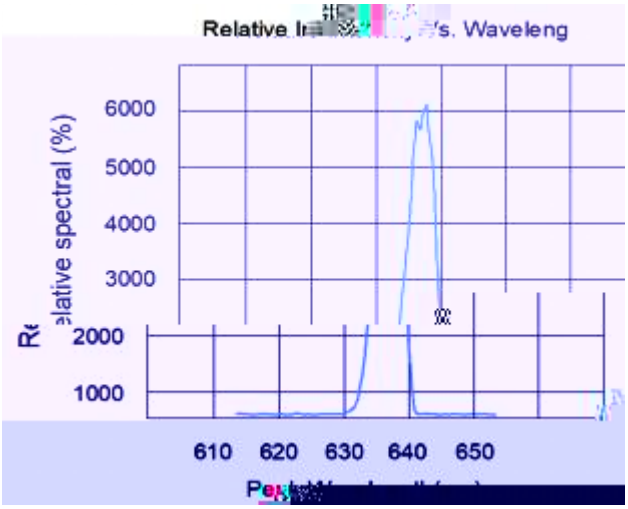

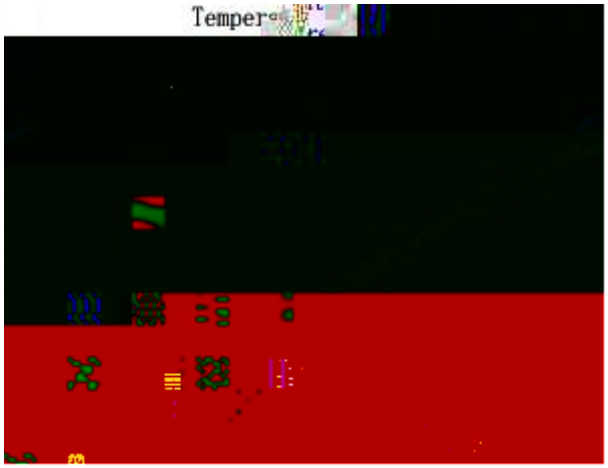

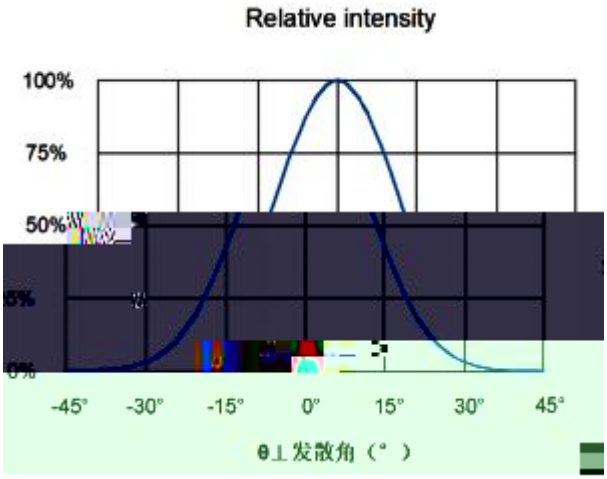

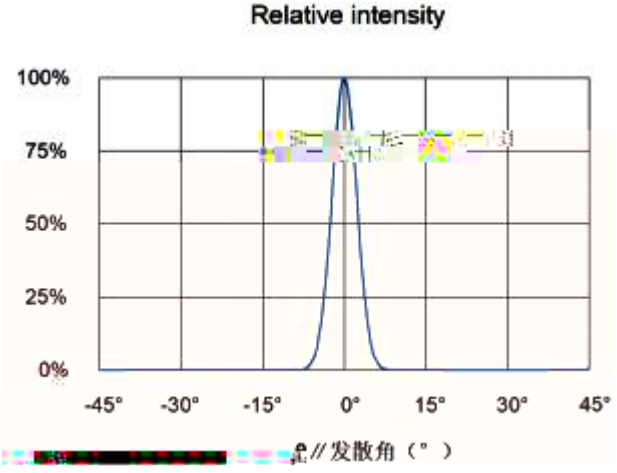



assembly

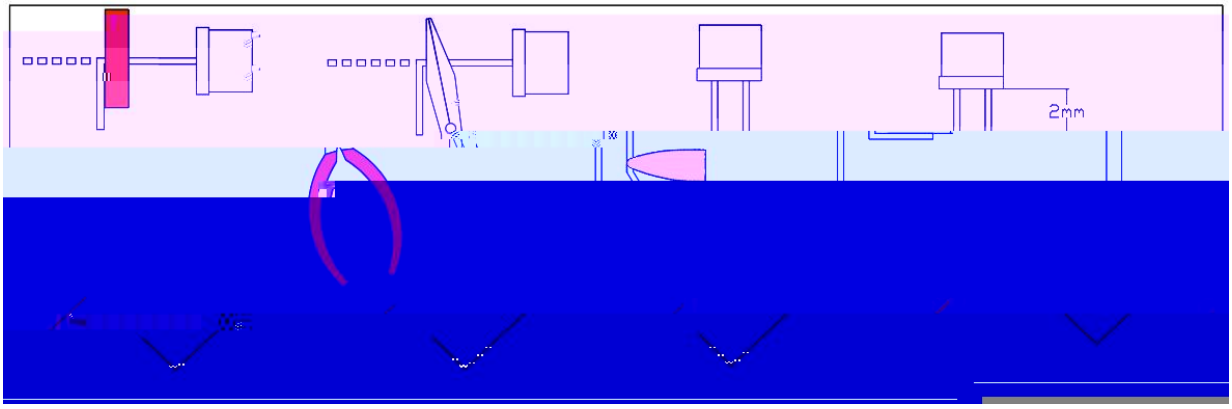

2. Electrostatic protection