0805 单闪翠绿 [redacted]

特点（[redacted]）：

* [redacted] L/W/H :2.0*1.2*0.8mm

Appearance dimension (L / w / h): 2.0 x 1.2 x 0.8mm

* [redacted]

Luminous color and colloid: high brightness Emerald green / transparent colloid

* [redacted] ROHS

* Environmental protection products meet ROHS requirements

* [redacted] MSL :3

Moisture sensitivity level MSL : 3 levels

* EIA [redacted]

EIA standard packaging

* [redacted]

Suitable for automatic mounter

* [redacted]

Suitable for reflow soldering process

* [redacted]

Positive output, power on long flash

应用领域（P [redacted]）：

* [redacted]

Channel letter sign

*

Sign

*

Identifying [redacted]

* [redacted]

Advertising light box

*

[redacted]

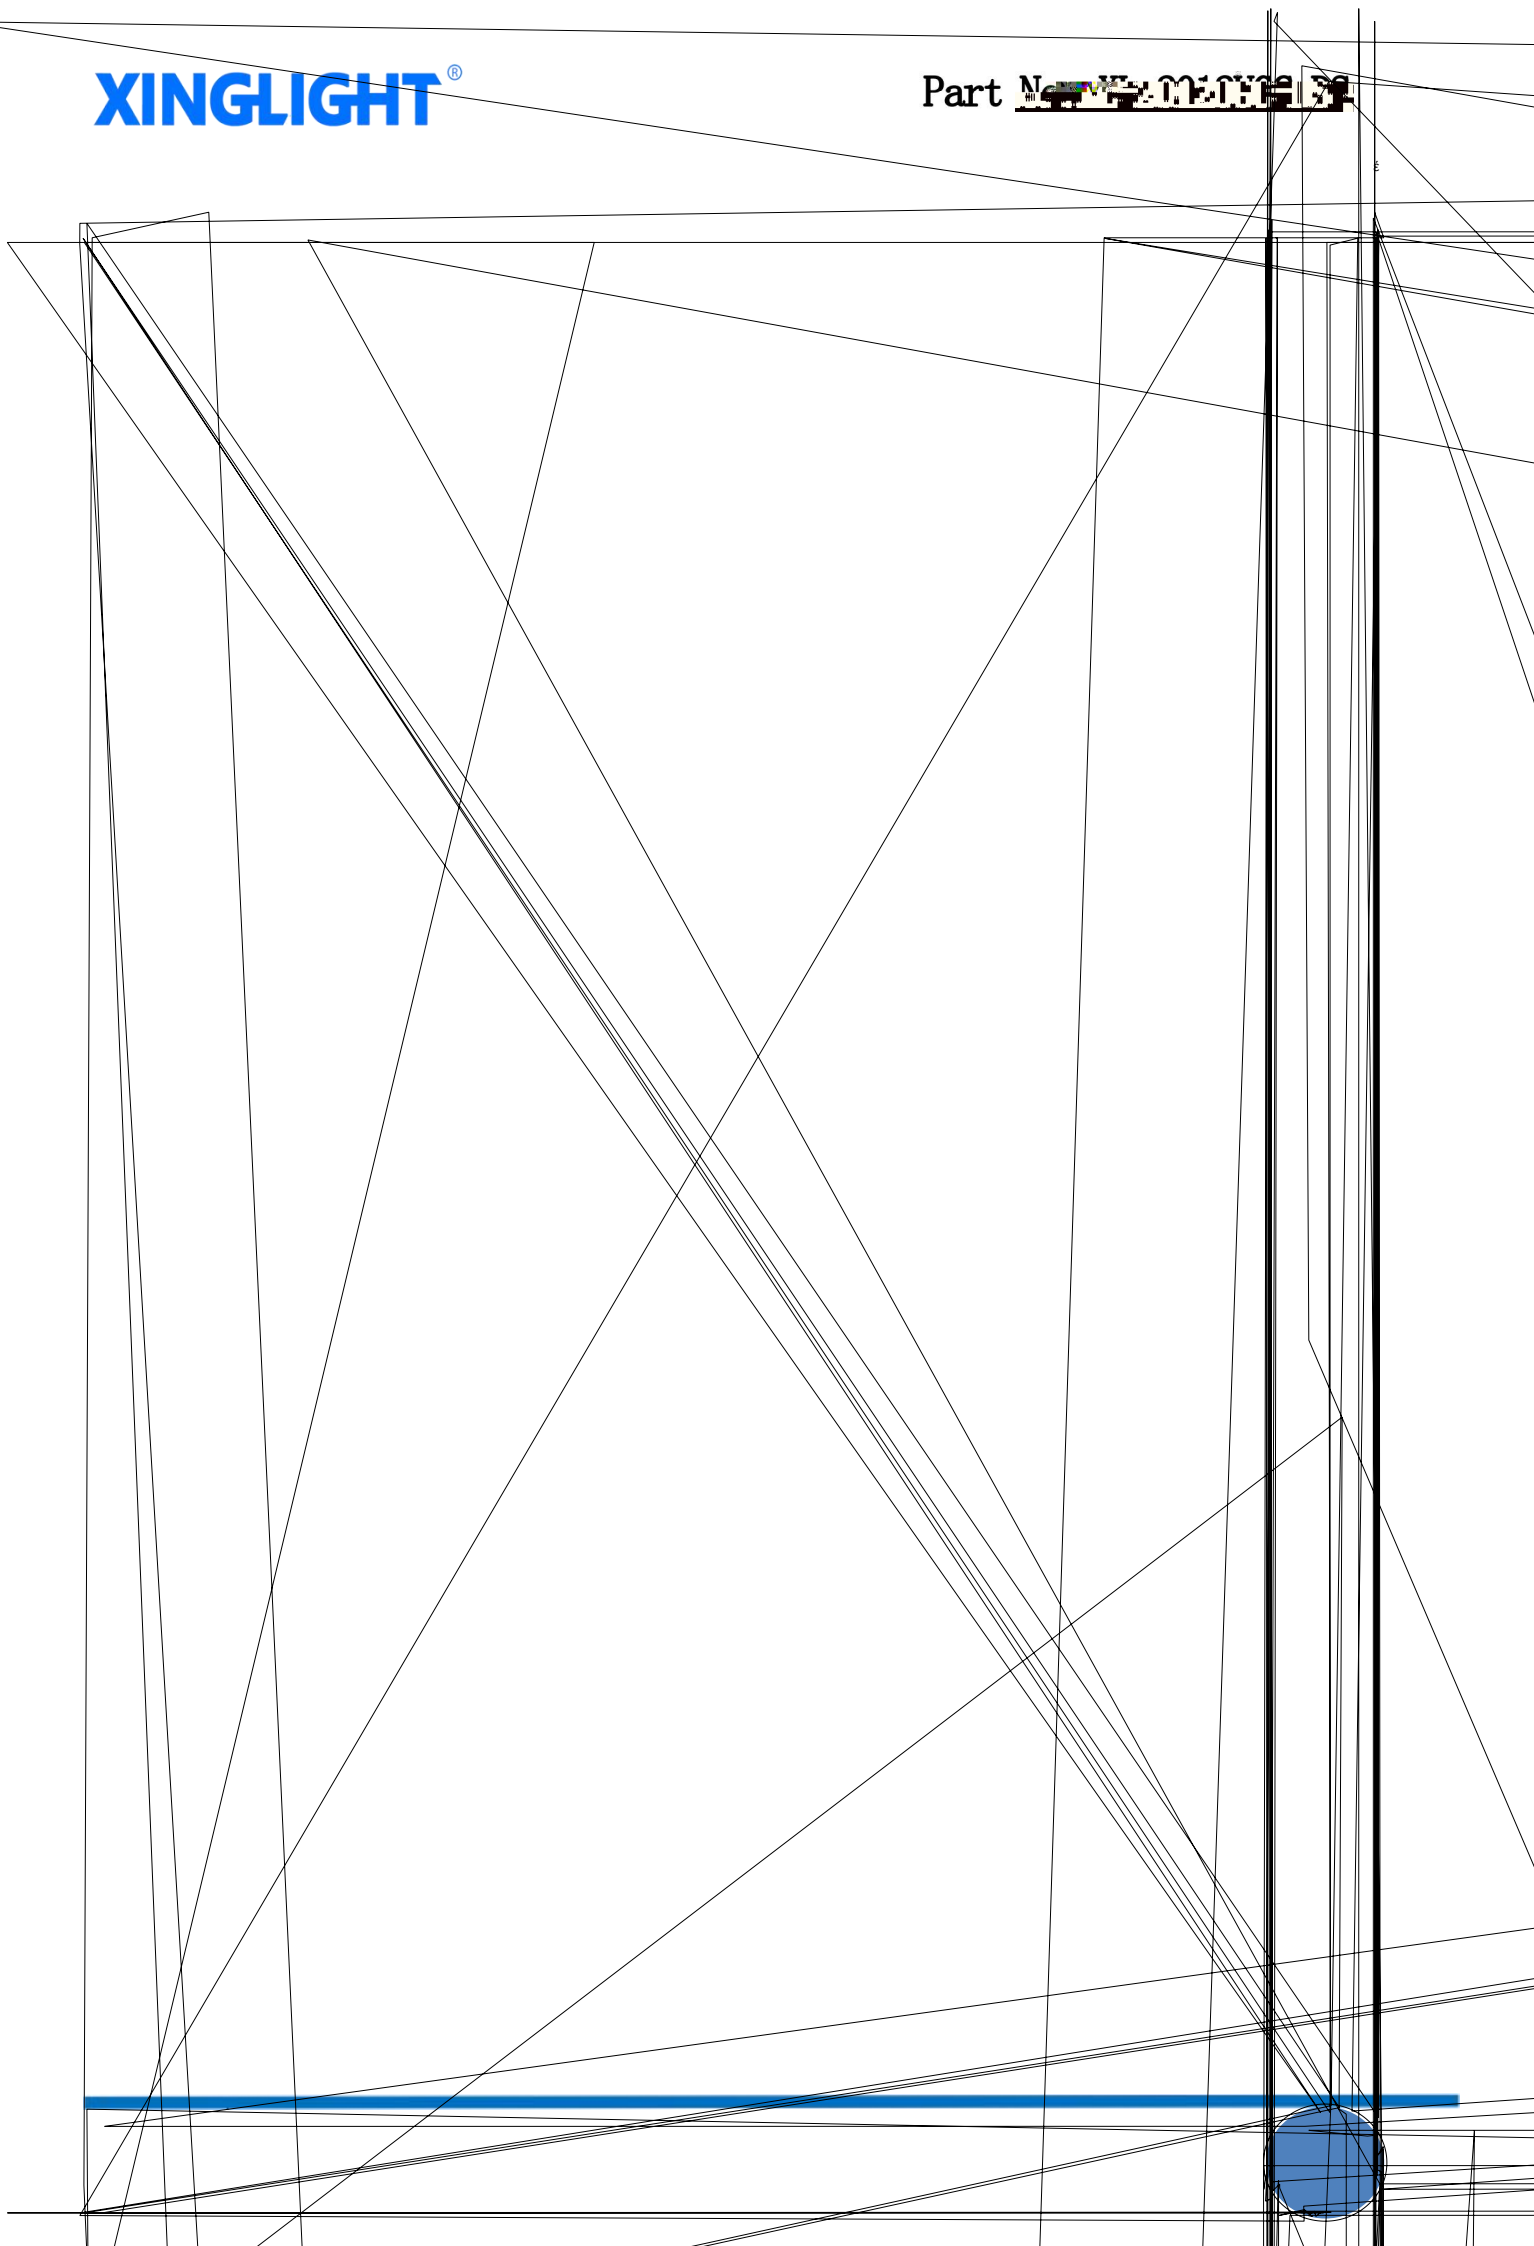

亮度分档

代码	最小值	最大值	单位

可靠性试验

Reliability Test Items And Conditions

lass	Test item	Testing environment	Te

使用注意事项（1）

Precautions (1)

贮存：

¥ ˚˚ ج ą ´ ˘ ╕˘ ˚˚ ج ₩ Ḡ Â

Moisture proof and anti-electrostatic package with moisture absorbent material is used, to keep moisture to a minimum.

¥ ╟˘ ˚˚ ج ض Ь G 30Ņ˘ Ь G 60%RH Ţ Â

Before opening the package, the product should be kept at 30Ņ or less and humidity less than 60% RH, and be used within a year.

¥ Ư˘ ˚˚ ج ض Ь G 30Ņ˘ Ь G 40%RH Ţ˘ ғ ض 168 ˆ 7 ˜ ṗ ą Â ƀ ч Ь G 30Ņ˘ Ь G 60%RH Â

After opening the package, the product should be stored at 30Ņ or less and humidity less than 40%RH, and be soldered within 168 hours (7 days). It is recommended that the product be operated at the workshop condition of 30Ņ or less and humidity less than 60%RH.

¥ G LED˘ Ꝑ ╕ ´ ˘ ˚˚ ج ₥ ɣ⁚⁚ Ũ Ð˘ ˆ ɣ ⌈ ₩ Â Ð' ˆ60 ¤ 5˜ Ņ˘ 24 Â

If the moisture absorbent material has fade away or the LEDs have exceeded the storage time, baking treatment should be performed based on the following condition: (60 ¤ 5)Ņ for 24 hours.

静电：

ɇ Ψ ˚˚ ج Ü ĩ˘ ɒ h ㄴ ɣ ˘ ' Ή Ψ ˚˚ ج Â ɣ ض ą Ű Â ˜ ɇ ج ض˘ ▯ Ű ì ɾ ɇ Â ą ˘ ثخ ˘ ƀ à ƀ à ˘ ج˘ ɇ Â

LEDs static electricity or surge voltage damages the LEDs. Damaged LEDs will show some unusual characteristic such as the forward voltage becomes lower, or the LEDs do not light at the low current. even not light.

All devices, equipment and machinery must be properly grounded. At the same time, it is recommended that wrist bands or anti-electrostatic] Â

使用注意事项（3）

Precautions (3)

其他事项

ǔ ç Ь p ψ ˇ ǯ G ﻍ ç Ї Â ㄏ ʐ ǯ ڈ ṗ
ɛ ˇ ﻍ ~ ç ∀ ㄏ ʐ ˇ ≠ ç G Й p ﻋﺽ Ţ Â

When handling the product, touching the encapsulant with bare hands will not only contaminate its surface, but also affect on its optical characteristics. Excessive force to the encapsulant might result in catastrophic failure of the LEDs due to die breakage or wire deformation. For this reason, please do not put excessive stress on LEDs, especially when the LEDs are heated such as during Reflow Soldering.



LED № ˇ ~ ﻁ à r ⌂ à № Â ض ǔ
Ḏ ǯ Â

The epoxy resin of encapsulant is fragile, so please avoid scratch or friction over the epoxy resin surface. While handling the product with tweezers, do not hold by the epoxy resin, be careful.

眼睛保护忠告:

LED ǔ ѽ ˇ ~ ǔ ѽ ѽ ˇ ≠ G ₩ ѽ LED ˇ ѽ H ɲ Â

Viewing direct to the light emitting center of the LEDs, especially those of great Luminous Intensity, will cause great hazard to human eyes. Please be careful.

й ḱ ˇ Ьз

If there are any modifications to the specification sheet, no further notice will be given